

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0761651104

Status:


Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 100 Ohm 3 Pair Vertical Backplane Header, Unguided, Open Endwall, 10 Columns, 90 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.46mm, Lead-Free

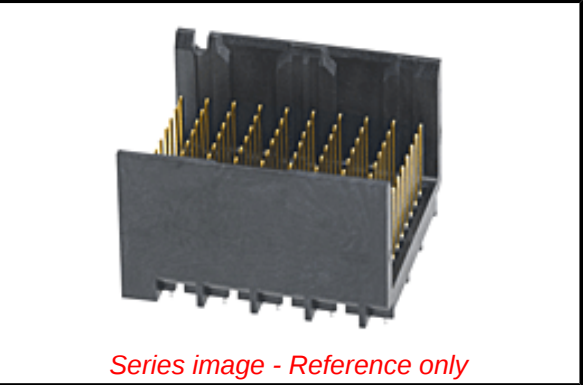

Series image - Reference only

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-76060-999 \(PDF\)](#)

[Application Specification AS-76060-990 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	76165
Application	Conventional, Mezzanine
Application Tooling Documents	TM-622018799
Component Type	PCB Header
Overview	Impact™ Backplane Connector and Cable Assembly System
Product Name	Impact™
UPC	883906222833
Physical	
Circuits (Loaded)	90
Circuits (maximum)	90
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	2.098/g
Number of Columns	10
Number of Pairs	3
Number of Rows	9
Orientation	Vertical
PC Tail Length	1.40mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	No
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Contains SVHC(2014 December 17): No	
Halogen-Free	
Status	
Low-Halogen	
Need more information on product environmental compliance?	
Email productcompliance@molex.com	
Please visit the Contact Us section for any non-product compliance questions.	
China ROHS	Green Image
ELV	Not Relevant

Search Parts in this Series

76165 Series

Mates With

76170 Impact™ 100 Ohm Daughtercard

Use With

75234 Backplane Free Standing Guide Pin

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Backplane Module	0622018647
Installation, Press-In	
Tool	

Current - Maximum per Contact	0.75A	Backplane Insertion 0621005800
Data Rate	25.0 Gbps	Tool for Signal
Impedance	100#	Contact
Shield Type	N/A	Backplane Header 0621009610
Shielded	No	Removal Tool for
Voltage - Maximum	30V AC (RMS)/DC	GbX-U™, I-Trac™,
Solder Process Data		Impact™, or TinMan
Lead-freeProcess Capability	N/A	
Material Info		
Reference - Drawing Numbers		
Application Specification	AS-76060-990	
Electrical Model Document	EE-76170-0001	
Product Specification	PS-76060-999	
Sales Drawing	SD-76165-001	
Symbol/Footprint Data	SYM-76165-1104	

This document was generated on 06/26/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION