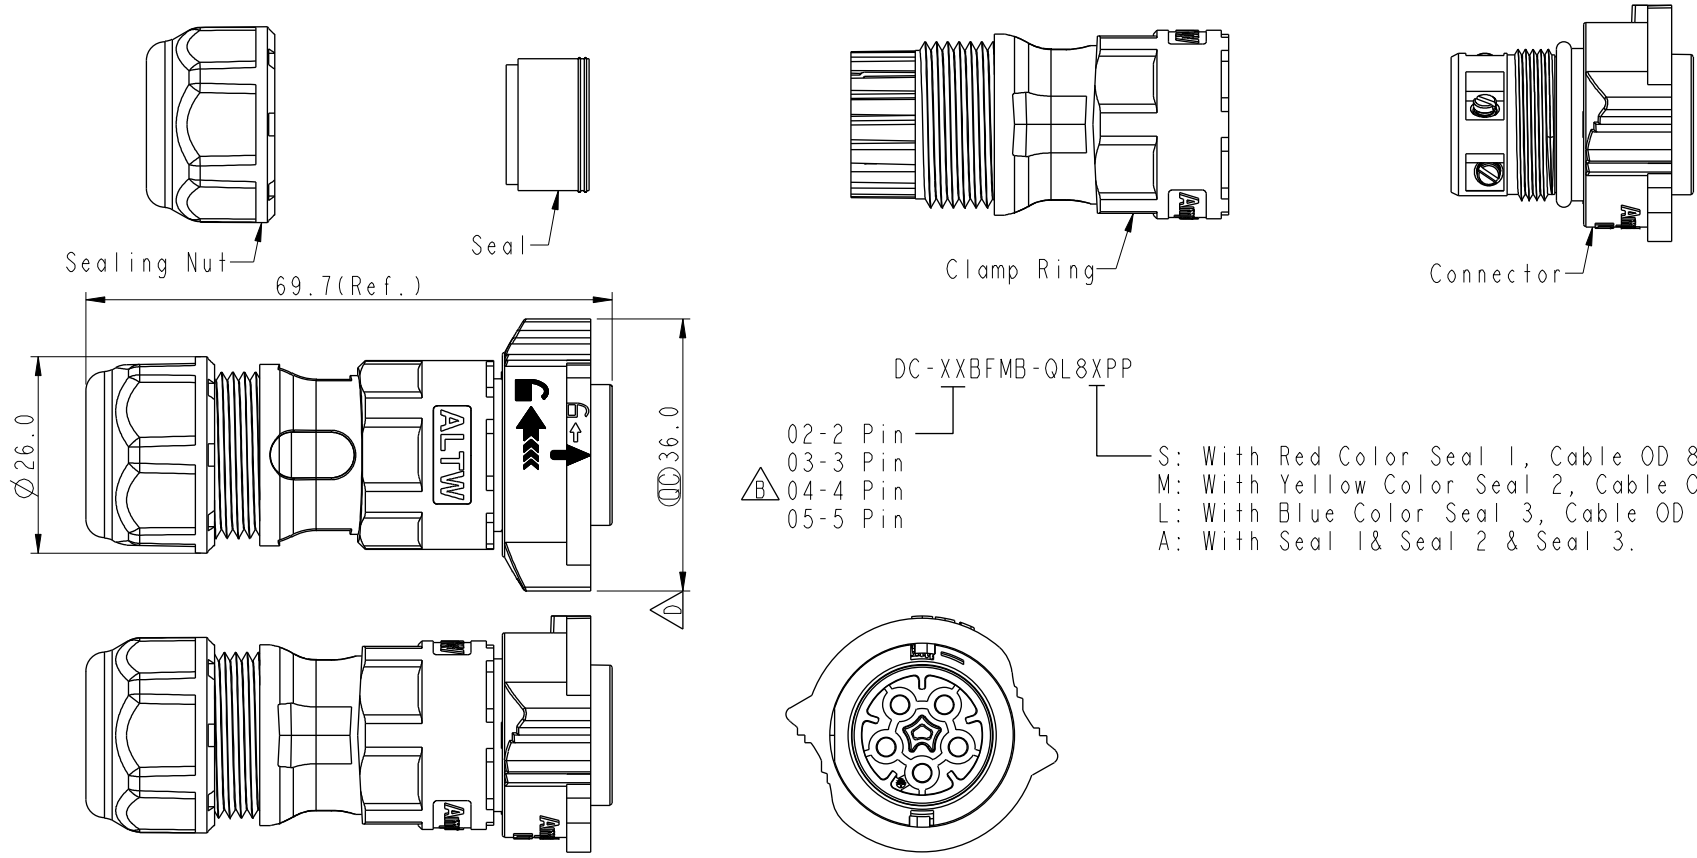
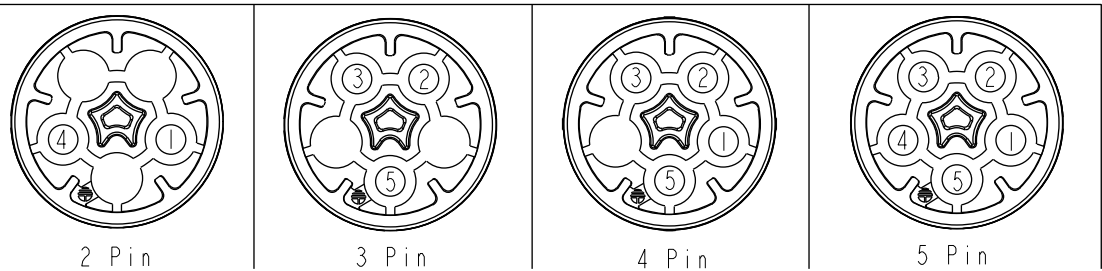


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C180527	2018/11/28	Mafei	Adding 4 Pin Drawing.
C	C191385	2019/08/02	Siou	Revise Rated Voltage.
D	E191814	2019/10/23	Ruru	△ D X3



S: With Red Color Seal 1, Cable OD 8.0~10.0mm.
M: With Yellow Color Seal 2, Cable OD 10.0~12.0mm.
L: With Blue Color Seal 3, Cable OD 12.0~14.0mm.
A: With Seal 1 & Seal 2 & Seal 3.

Pin Assignments Front View



△ Note:



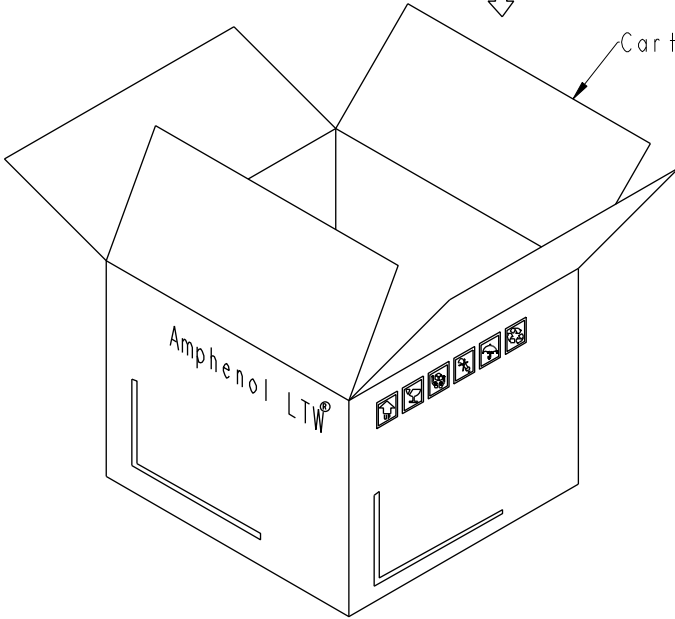
- * ∅ Important Dimension
- * Waterproof Rate: IP68, Mated
- IP68 : 1M Depth Of Water In 24hours
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seals: Rubber

UNIT:mm				TITLE	
				XLOK, D-20A, 02P, CABLE W/O SR	
				F, M, FI SCREW IN, XLOK	
TOLERANCE		SCALE		SIZE	
±0.5 mm		8:5		A4	
		REV.		WC-REV.	
		D		A.3	
				SHEET	
				1 OF 2	
				QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO		DRAWN BY		DATE	
		Siou		2019-08-02	
DWG NO		CHECKED BY		DATE	
DC-XXBFMB-QL8XPP		Eagle		2019-08-02	
CUSTOMER		APPROVED BY		DATE	
ALTW		Neo		2019-08-02	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

	1	2	3	4	5	6	7	8
F								
E	 QTY: 1 Pcs →  PE Bag							
D	↓ QTY: XX Pcs  Carton							
C								
B								
A	UNIT:mm   TOLERANCE ±0.5 mm TITLE XLOK, D-20A, 02P, CABLE W/O SR F, M, FI SCREW IN, XLOK  SCALE 8:5 SIZE A4 SHEET 2 OF 2 REV. D WC-REV. A.3 QC:Inspection item Amphenol LTW 安費諾亮泰企業股份有限公司 ITEM NO DWG NO CUSTOMER DRAWN BY CHECKED BY APPROVED BY DATE DATE DATE							
	1	2	3	4	5	6	7	8

Note:

- * One Set Unassembled In One PE Bag.
(每一組未組裝，放置於一個PE袋，並封口，如圖示)
- * Label is Attached To PE Bag Front.
(標籤貼在PE袋正面)

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.