


B

A

B


A

DATE	REV	ECN	APP'D. BY
5/29/19	A0	RELEASED	—
—	—	—	—

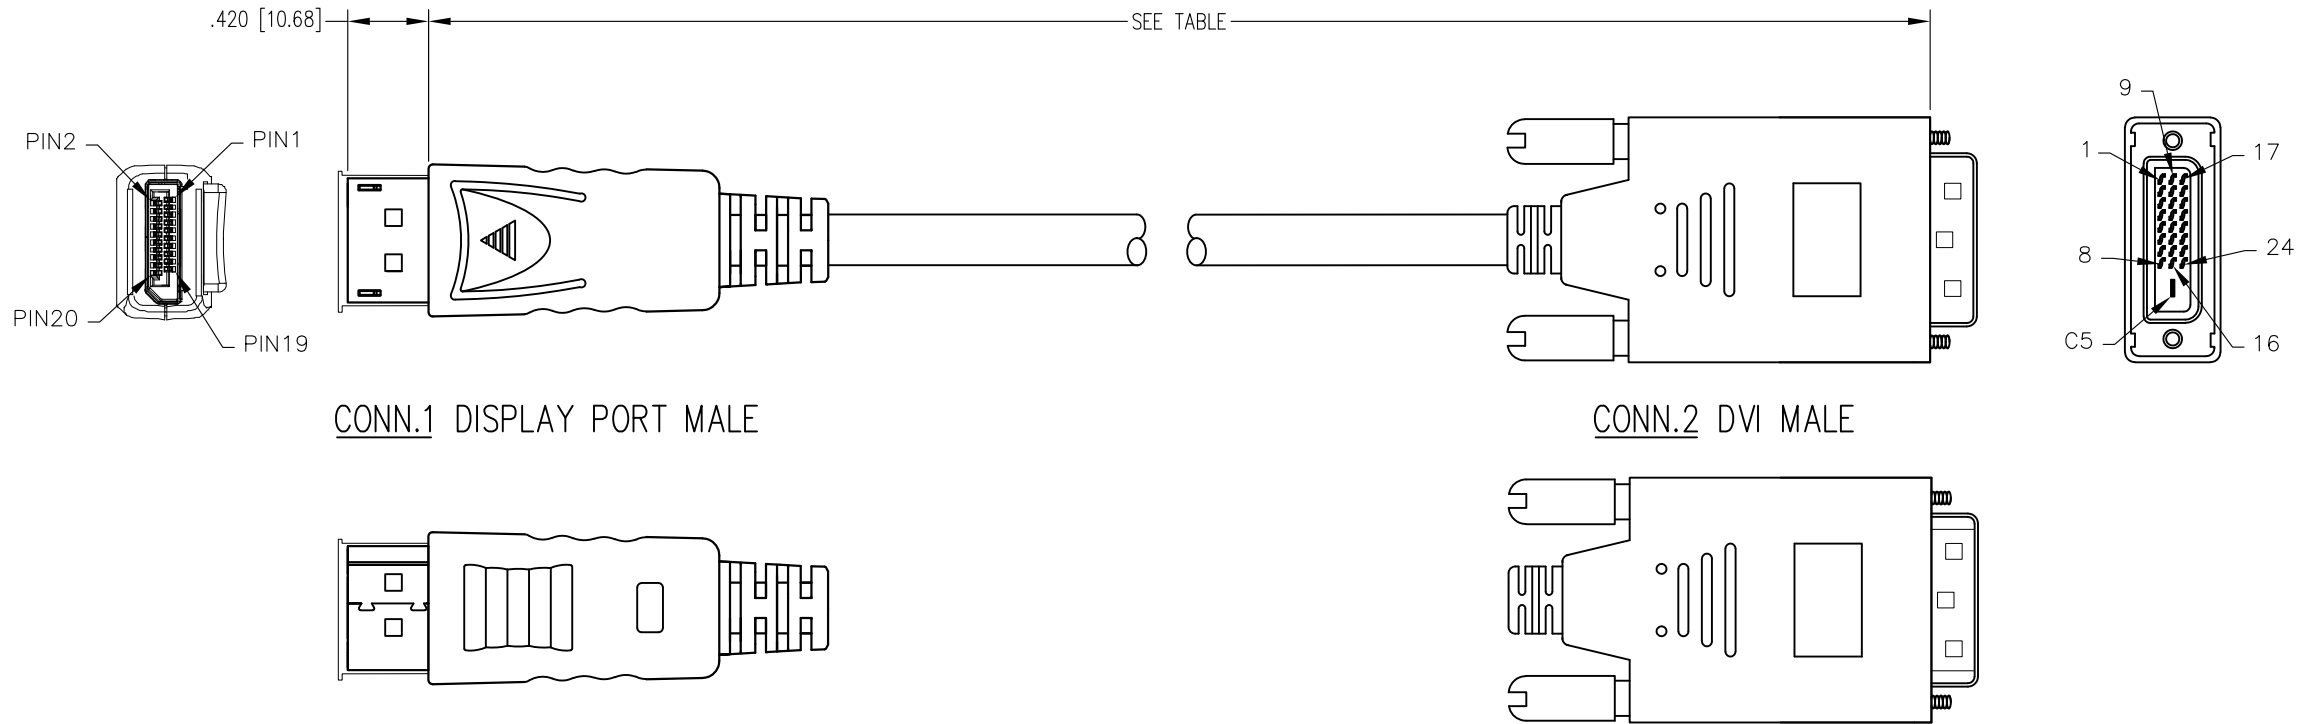


NOTES:


- CONNECTOR COMPONENTS:
TRANSPARENT DUST COVER
INSIDE MOLDING: PE
STRAIN RELIEF MOLDING: 45P PVC, BLACK
OUTSIDE MOLDING:
DISPLAY PORT: ABS, BLACK
DVI: 45P PVC, BLACK
SHELL PLATING: GOLD FLASH
CONTACT: GOLD PLATING
SCREW: #4-40 UNC NICKEL PLATED
DISPLAY PORT CABLE UL20276 [28AWG(7/0.127TC)
*1P+D.W+AL+MYLAR)*5+28AWG(7/0.127TC)
*5C+AL/MY+D.W+BD+JACKET PVC COLOR: BLACK
OD:.29±.008 [7.3±0.2]
- ELECTRICAL TESTING:
100% OPEN & SHORT & CONTINUITY WIRE TEST
CONTACT RESISTANCE: 2 OHM(MAX)
INSULATION RESISTANCE: 10M OHM(MIN)
HI-POT TEST: DC 100V/10ms
- PACKAGING
ONE CABLE PER BAG




PIN ASSIGNMENT

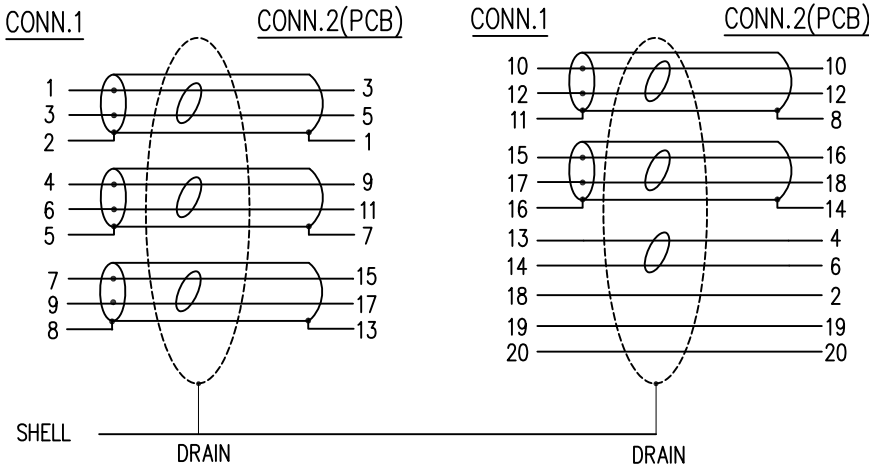

P/N	LENGTH
BC-DV003F	36±0.8 [915±20]
BC-DV006F	72±1.2 [1830±30]
BC-DV010F	120±1.6 [3050±40]



THIRD ANGLE PROJECTION
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS: INCHES [METRIC]
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°
SHEET NO. 1 OF 1



bel

206 Van Vorst Street
Jersey City, NJ 07302
+1 201 432 0463
<http://www.belfuse.com>

TITLE: DISPLAY PORT MALE TO DVI MALE CABLE			
DRN BY: JMM	DATE 05/16/19		
APPD BY: ADB	DATE 05/29/19		
DWG NO. CT999191	REV. A0		