

1N4678 THRU 1N4717

SILICON ZENER DIODE  
LOW LEVEL  
500mW, 1.8 THRU 43 VOLT  
5% TOLERANCE



www.centra-semi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 1N4678 series devices are silicon Zener diodes designed for applications requiring an extremely low operating current (50µA), and low leakage.

MARKING: FULL PART NUMBER



DO-35 CASE

MAXIMUM RATINGS: ( $T_L=75^{\circ}\text{C}$ )

Power Dissipation

Operating and Storage Junction Temperature

SYMBOL

$P_D$

$T_J, T_{stg}$

500

-65 to +200

UNITS

mW

$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS: ( $T_A=25^{\circ}\text{C}$ )  $V_F=1.5\text{V MAX @ } I_F=100\text{mA}$  (for all types)

| Type   | Zener Voltage<br>$V_Z @ I_{ZT}$ |     |       | Test Current  | Maximum Reverse Leakage Current |         | Maximum Voltage Change* | Maximum Regulator Current |
|--------|---------------------------------|-----|-------|---------------|---------------------------------|---------|-------------------------|---------------------------|
|        | MIN                             | NOM | MAX   | $I_{ZT}$      | $I_R$                           | @ $V_R$ | $\Delta V_Z$            | $I_{ZM}$                  |
|        | V                               | V   | V     | $\mu\text{A}$ | $\mu\text{A}$                   | V       | V                       | mA                        |
| 1N4678 | 1.710                           | 1.8 | 1.890 | 50            | 7.5                             | 1.0     | 0.70                    | 120.0                     |
| 1N4679 | 1.900                           | 2.0 | 2.100 | 50            | 5.0                             | 1.0     | 0.70                    | 110.0                     |
| 1N4680 | 2.090                           | 2.2 | 2.310 | 50            | 4.0                             | 1.0     | 0.75                    | 100.0                     |
| 1N4681 | 2.280                           | 2.4 | 2.520 | 50            | 2.0                             | 1.0     | 0.80                    | 95.0                      |
| 1N4682 | 2.565                           | 2.7 | 2.835 | 50            | 1.0                             | 1.0     | 0.85                    | 90.0                      |
| 1N4683 | 2.850                           | 3.0 | 3.150 | 50            | 0.8                             | 1.0     | 0.90                    | 85.0                      |
| 1N4684 | 3.135                           | 3.3 | 3.465 | 50            | 7.5                             | 1.5     | 0.95                    | 80.0                      |
| 1N4685 | 3.420                           | 3.6 | 3.780 | 50            | 7.5                             | 2.0     | 0.95                    | 75.0                      |
| 1N4686 | 3.705                           | 3.9 | 4.095 | 50            | 5.0                             | 2.0     | 0.97                    | 70.0                      |
| 1N4687 | 4.085                           | 4.3 | 4.515 | 50            | 4.0                             | 2.0     | 0.99                    | 65.0                      |
| 1N4688 | 4.465                           | 4.7 | 4.935 | 50            | 10                              | 3.0     | 0.99                    | 60.0                      |
| 1N4689 | 4.845                           | 5.1 | 5.355 | 50            | 10                              | 3.0     | 0.97                    | 55.0                      |
| 1N4690 | 5.320                           | 5.6 | 5.880 | 50            | 10                              | 4.0     | 0.96                    | 50.0                      |
| 1N4691 | 5.890                           | 6.2 | 6.510 | 50            | 10                              | 5.0     | 0.95                    | 45.0                      |
| 1N4692 | 6.460                           | 6.8 | 7.140 | 50            | 10                              | 5.1     | 0.90                    | 35.0                      |
| 1N4693 | 7.125                           | 7.5 | 7.875 | 50            | 10                              | 5.7     | 0.75                    | 31.8                      |
| 1N4694 | 7.790                           | 8.2 | 8.610 | 50            | 1.0                             | 6.2     | 0.50                    | 29.0                      |
| 1N4695 | 8.265                           | 8.7 | 9.135 | 50            | 1.0                             | 6.6     | 0.10                    | 27.6                      |
| 1N4696 | 8.645                           | 9.1 | 9.555 | 50            | 1.0                             | 6.9     | 0.08                    | 26.2                      |
| 1N4697 | 9.500                           | 10  | 10.50 | 50            | 1.0                             | 7.6     | 0.10                    | 24.8                      |

\*  $\Delta V_Z = V_Z @ 100\mu\text{A}$  Minus  $V_Z @ 10\mu\text{A}$

R5 (8-October 2015)

1N4678 THRU 1N4717

**SILICON ZENER DIODE  
LOW LEVEL  
500mW, 1.8 THRU 43 VOLT  
5% TOLERANCE**




**ELECTRICAL CHARACTERISTICS - Continued:** ( $T_A=25^{\circ}\text{C}$ )  $V_F=1.5\text{V MAX @ } I_F=100\text{mA}$  (for all types)

| Type   | Zener Voltage<br>V <sub>Z</sub> @ I <sub>ZT</sub> |     |       | Test Current | Maximum Reverse Leakage Current |                                 | Maximum Voltage Change* | Maximum Regulator Current |
|--------|---------------------------------------------------|-----|-------|--------------|---------------------------------|---------------------------------|-------------------------|---------------------------|
|        | MIN                                               | NOM | MAX   |              | I <sub>ZT</sub>                 | I <sub>R</sub> @ V <sub>R</sub> |                         |                           |
|        | V                                                 | V   | V     |              | μA                              | μA                              | V                       | V                         |
| 1N4698 | 10.45                                             | 11  | 11.55 | 50           | 0.05                            | 8.4                             | 0.11                    | 21.6                      |
| 1N4699 | 11.40                                             | 12  | 12.60 | 50           | 0.05                            | 9.1                             | 0.12                    | 20.4                      |
| 1N4700 | 12.35                                             | 13  | 13.65 | 50           | 0.05                            | 9.8                             | 0.13                    | 19.0                      |
| 1N4701 | 13.30                                             | 14  | 14.70 | 50           | 0.05                            | 10.6                            | 0.14                    | 17.5                      |
| 1N4702 | 14.25                                             | 15  | 15.75 | 50           | 0.05                            | 11.4                            | 0.15                    | 16.3                      |
| 1N4703 | 15.20                                             | 16  | 16.80 | 50           | 0.05                            | 12.1                            | 0.16                    | 15.4                      |
| 1N4704 | 16.15                                             | 17  | 17.85 | 50           | 0.05                            | 12.9                            | 0.17                    | 14.5                      |
| 1N4705 | 17.10                                             | 18  | 18.90 | 50           | 0.05                            | 13.6                            | 0.18                    | 13.2                      |
| 1N4706 | 18.05                                             | 19  | 19.95 | 50           | 0.05                            | 14.4                            | 0.19                    | 12.5                      |
| 1N4707 | 19.00                                             | 20  | 21.00 | 50           | 0.01                            | 15.2                            | 0.20                    | 11.9                      |
| 1N4708 | 20.90                                             | 22  | 23.10 | 50           | 0.01                            | 16.7                            | 0.22                    | 10.8                      |
| 1N4709 | 22.80                                             | 24  | 25.20 | 50           | 0.01                            | 18.2                            | 0.24                    | 9.9                       |
| 1N4710 | 23.75                                             | 25  | 26.25 | 50           | 0.01                            | 19.0                            | 0.25                    | 9.5                       |
| 1N4711 | 25.65                                             | 27  | 28.35 | 50           | 0.01                            | 20.4                            | 0.27                    | 8.8                       |
| 1N4712 | 26.60                                             | 28  | 29.40 | 50           | 0.01                            | 21.2                            | 0.28                    | 8.5                       |
| 1N4713 | 28.50                                             | 30  | 31.50 | 50           | 0.01                            | 22.8                            | 0.30                    | 7.9                       |
| 1N4714 | 31.35                                             | 33  | 34.65 | 50           | 0.01                            | 25.0                            | 0.33                    | 7.2                       |
| 1N4715 | 34.20                                             | 36  | 37.80 | 50           | 0.01                            | 27.3                            | 0.36                    | 6.6                       |
| 1N4716 | 37.05                                             | 39  | 40.95 | 50           | 0.01                            | 29.6                            | 0.39                    | 6.1                       |
| 1N4717 | 40.85                                             | 43  | 45.15 | 50           | 0.01                            | 32.6                            | 0.43                    | 5.5                       |

\*  $\Delta V_Z = V_Z @ 100\mu\text{A}$  Minus  $V_Z @ 10\mu\text{A}$

#### DO-35 CASE - MECHANICAL OUTLINE

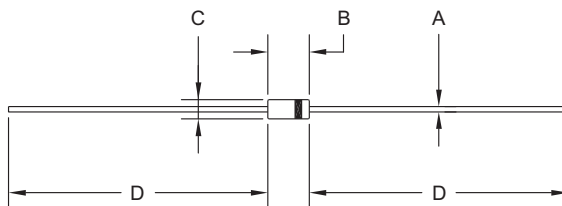

| SYMBOL | DIMENSIONS |       |             |      |
|--------|------------|-------|-------------|------|
|        | INCHES     |       | MILLIMETERS |      |
|        | MIN        | MAX   | MIN         | MAX  |
| A      | 0.018      | 0.022 | 0.46        | 0.56 |
| B      | 0.120      | 0.200 | 3.05        | 5.08 |
| C      | 0.060      | 0.090 | 1.52        | 2.29 |
| D      | 1.000      | -     | 25.40       | -    |

DO-35 (REV: R1)

**MARKING: FULL PART NUMBER**

R5 (8-October 2015)

1N4678 THRU 1N4717

SILICON ZENER DIODE





LOW LEVEL

500mW, 1.8 THRU 43 VOLT

5% TOLERANCE



## TYPICAL ELECTRICAL CHARACTERISTICS

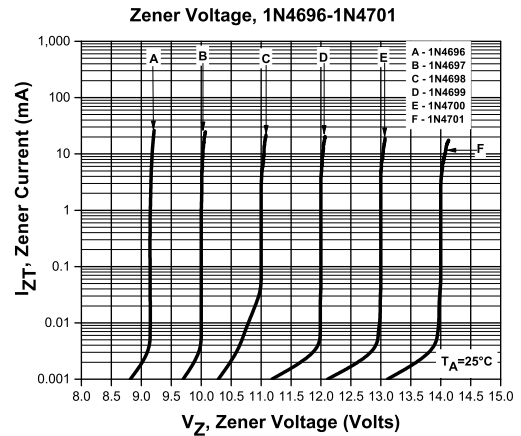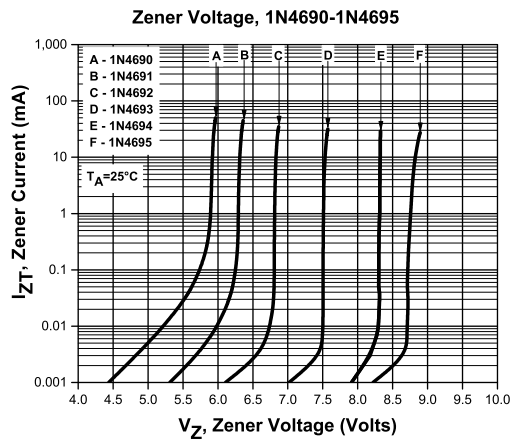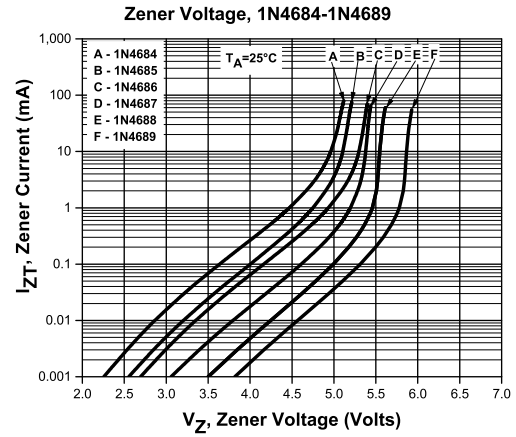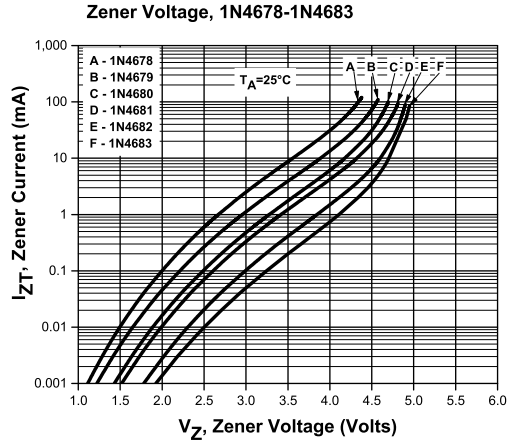





R5 (8-October 2015)

1N4678 THRU 1N4717

SILICON ZENER DIODE  
LOW LEVEL  
500mW, 1.8 THRU 43 VOLT  
5% TOLERANCE



## TYPICAL ELECTRICAL CHARACTERISTICS

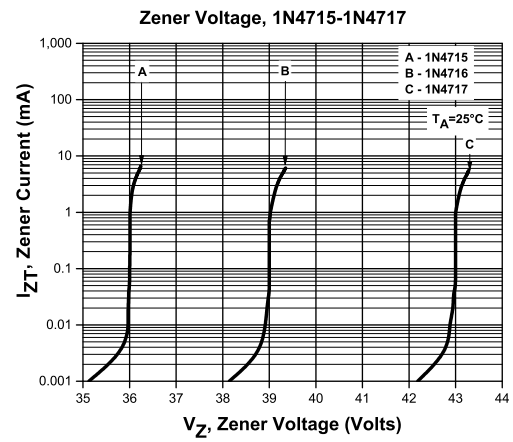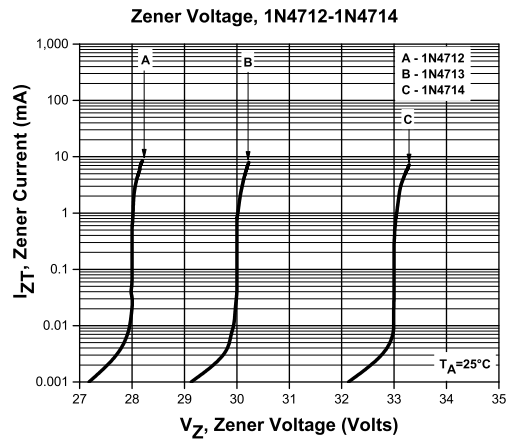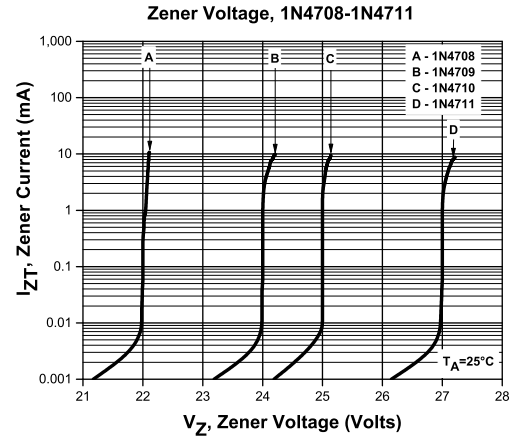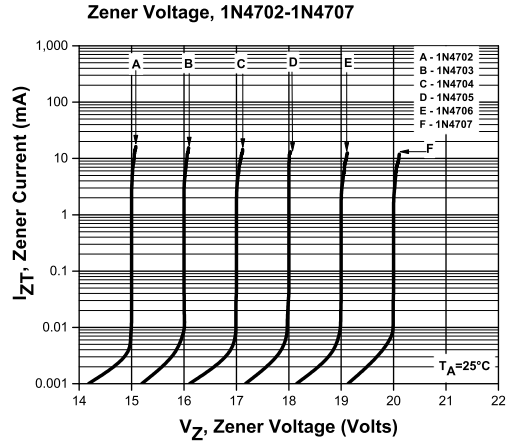


R5 (8-October 2015)

1N4678 THRU 1N4717  
SILICON ZENER DIODE  
LOW LEVEL  
500mW, 1.8 THRU 43 VOLT  
5% TOLERANCE



#### TYPICAL ELECTRICAL CHARACTERISTICS

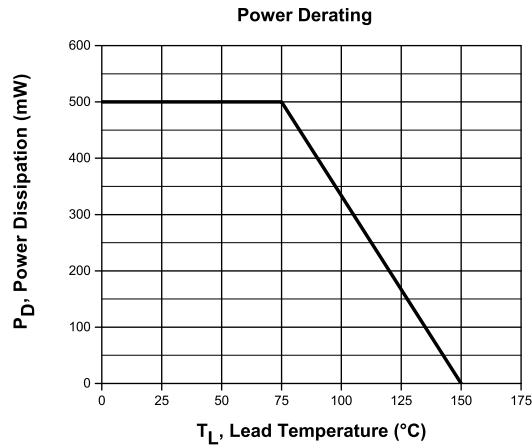

R5 (8-October 2015)

---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)