
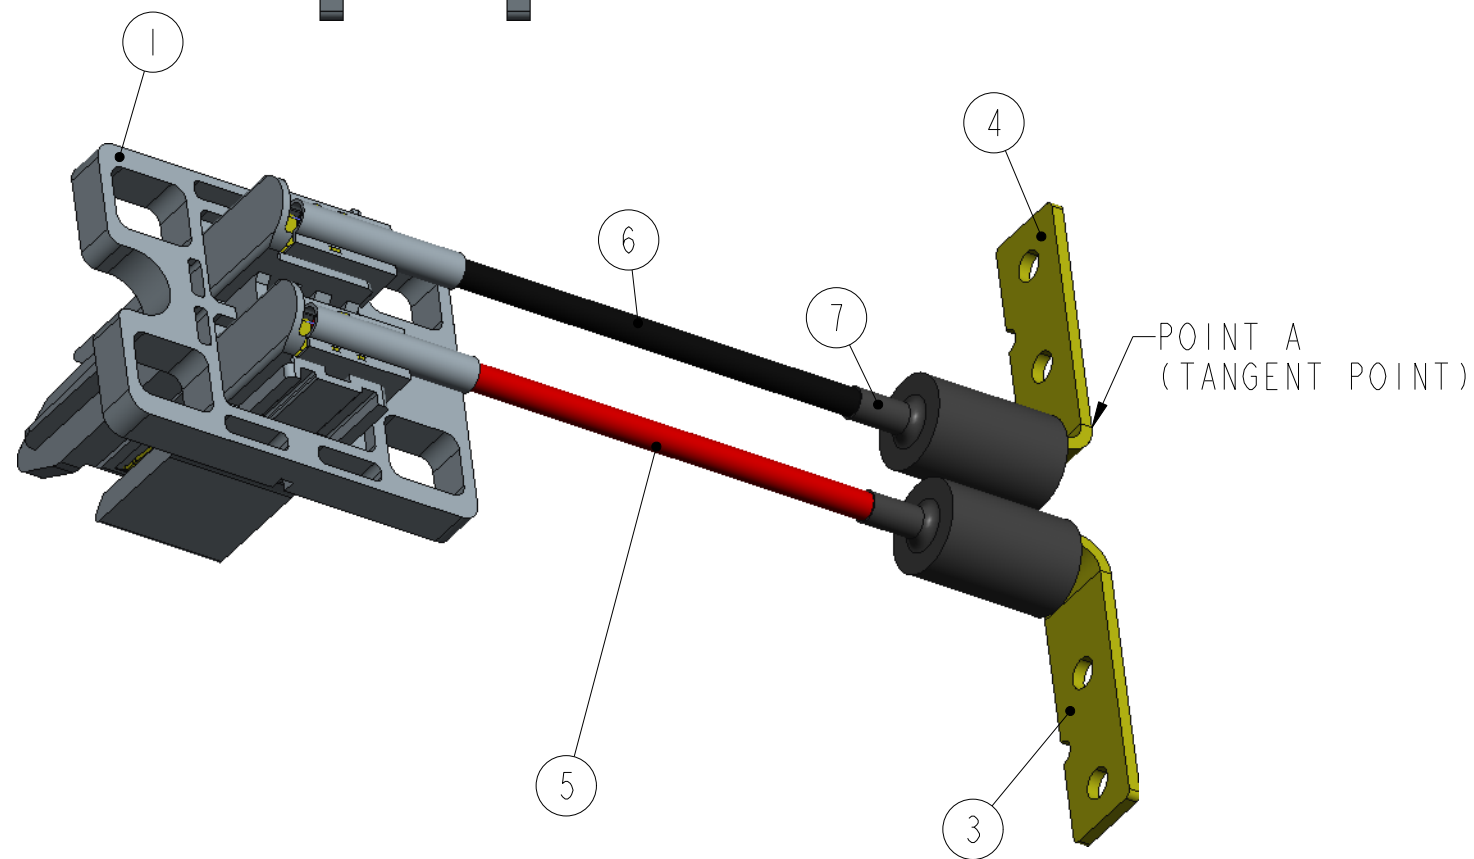
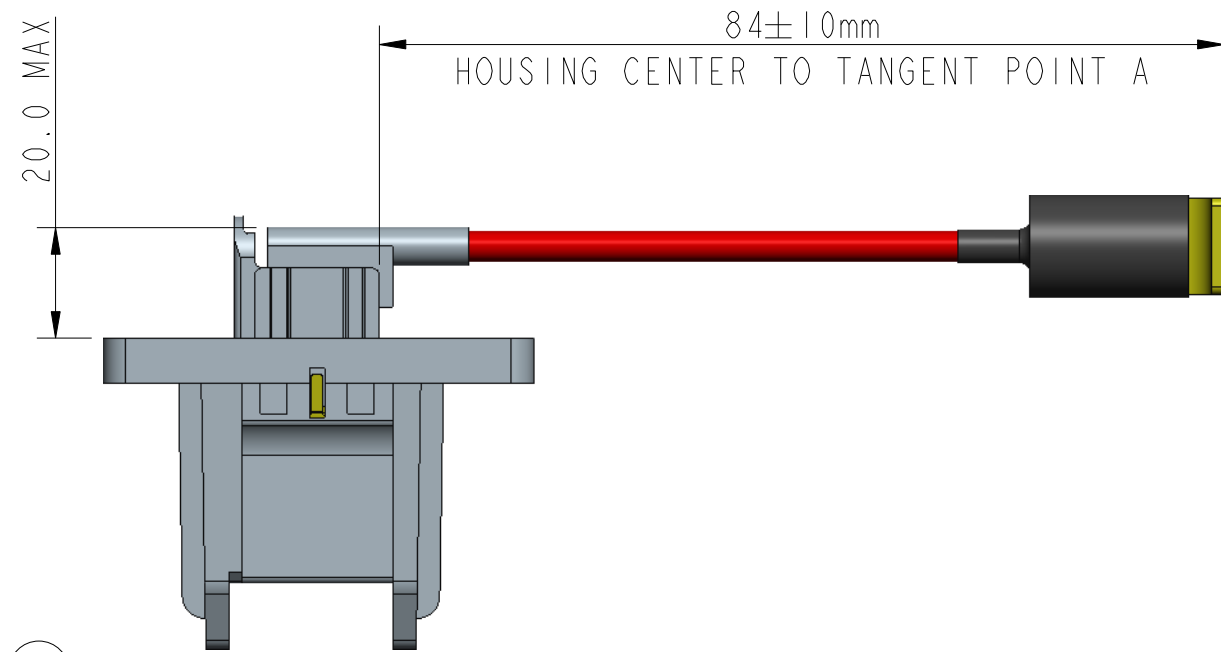
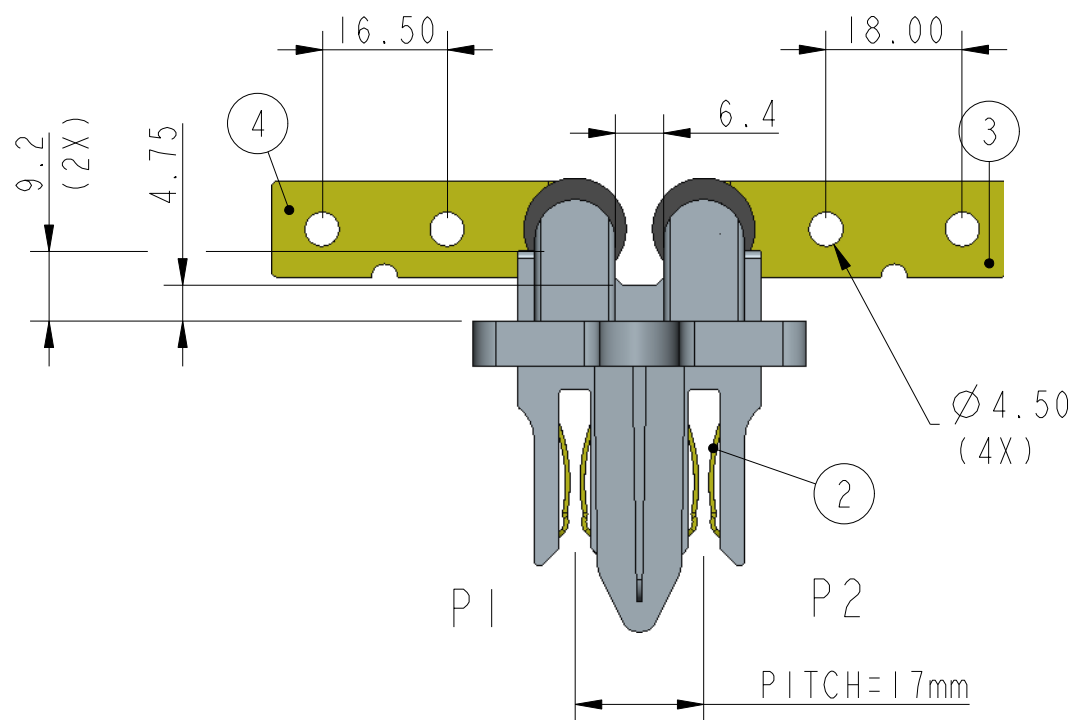


PART NUMBER	CUSTOMER P/N
10124234-120001LF	JBR



ITEM NO.	PART NUMBER	DESCRIPTION	Q'TY
1	10124237-001	HOUSING, THERMOPLASTIC RESIN, UL94V-0	1
2	10124235-12001LF	MATING CONTACT, HIGH CONDUCTIVITY COPPER ALLOY, TIN PLATED.	2
3	10124236-12001LF	FLAT CONTACT, THROUGH HOLE PITCH=18.00mm HIGH CONDUCTIVITY COPPER ALLOY TIN PLATED	1
4	10124236-12002LF	FLAT CONTACT, THROUGH HOLE PITCH=16.50mm HIGH CONDUCTIVITY COPPER ALLOY TIN PLATED	1
5	10124238-12001	FLEXIBLE POWER WIRE, 12 AWG, UL 10070, 105°C, 600V RED INSULATION COLOR, LENGTH=105mm	1
6	10124238-12002	FLEXIBLE POWER WIRE, 12 AWG, UL 10070, 105°C, 600V BLACK INSULATION COLOR, LENGTH=105mm	1
7	10124239-12000	THERMAL SHRINKAGE TUBING, COLOR BLACK, 0.5mm THICKNESS. LENGTH 25mm MIN.	4

NOTES:
(1) ELECTRICAL RATING: 600V, 20A
(2) WORKING TEMPERATURE: -20~75°C
(3)REFERENCE DOCUMENTS:
PRODUCT SPECIFICATION: FCI-GS-12-1127
PACKAGEING SPECIFICATION: FCI-GS-14-2295
(4)RoHS COMPLIANT.

spec ref				dr	Beer Fu	2013-02-01	projection 	MM 	size	A3	scale	1:1				
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Beer Fu	2013-02-01			ecn no	ELX-T-19523						
				chr	Beer Fu	2013-02-01										
				appr	Beer Fu	2013-02-01						product family	rel level	RELEASED		
surface 	linear	0.X	±0.30		title POWER CABLE FINAL ASSEMBLY				dwg no	10124234-120001LF					rev	C
		0.XX	±0.15													
		0.XXX	±0.05													
	angular	0°	±5°	www.fci.com	cat. no.			CUSTOMER				sheet 1 of 1				