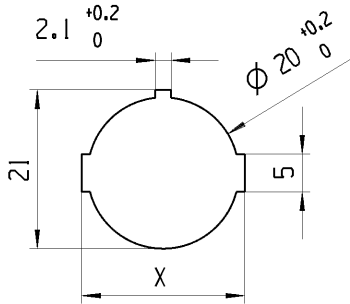
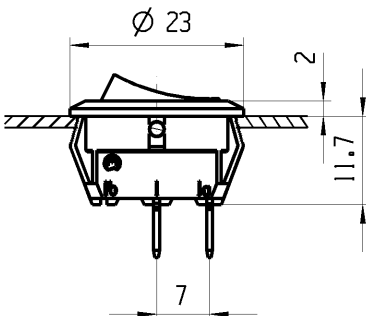
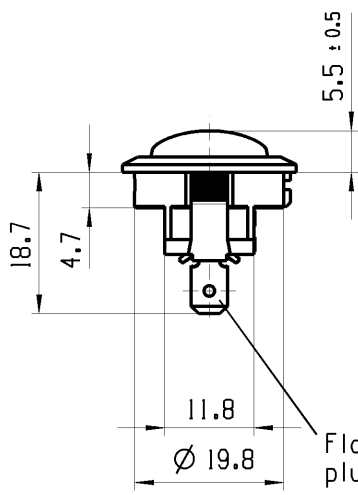
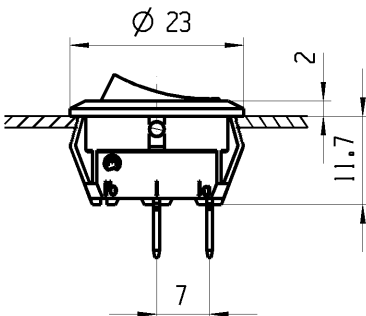
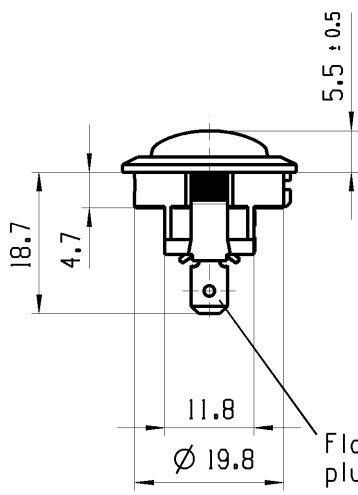
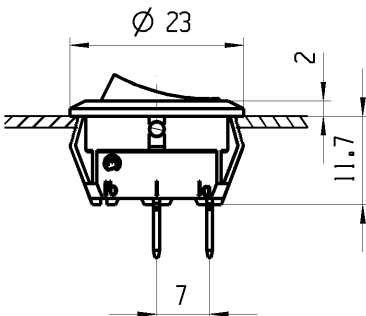
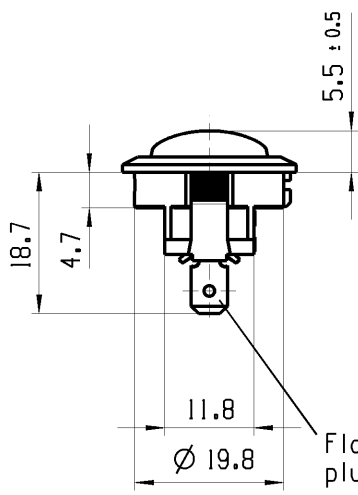


	1	2	3	4
A	Empfohlener Plattenausschnitt suggested panel cutout 	Plattendicke panel thickness	X	
		0.75-1.25	21.2 -0.1	
		1.25-2.00	21.4 -0.1	
		2.00-3.00	21.8 -0.1	
B			Flachstecker aehnli. plug-in sim. DIN 46 244-A4.8-0.8	
C				
D				
E	Aufschrift Marking  18.. 8(81)/250~5E4 12(41)/250~ 5/70A 250V~ T100/55  R149 	Aufschriftbeschreibung marking description R149= 15A 125-250V AC 3/4 HP 125V AC 1 1/2 HP 250V AC	Ausschalter 1-polig Fuer Geræete der Klasse II geeignet SPST suitable for appliances of class II	