
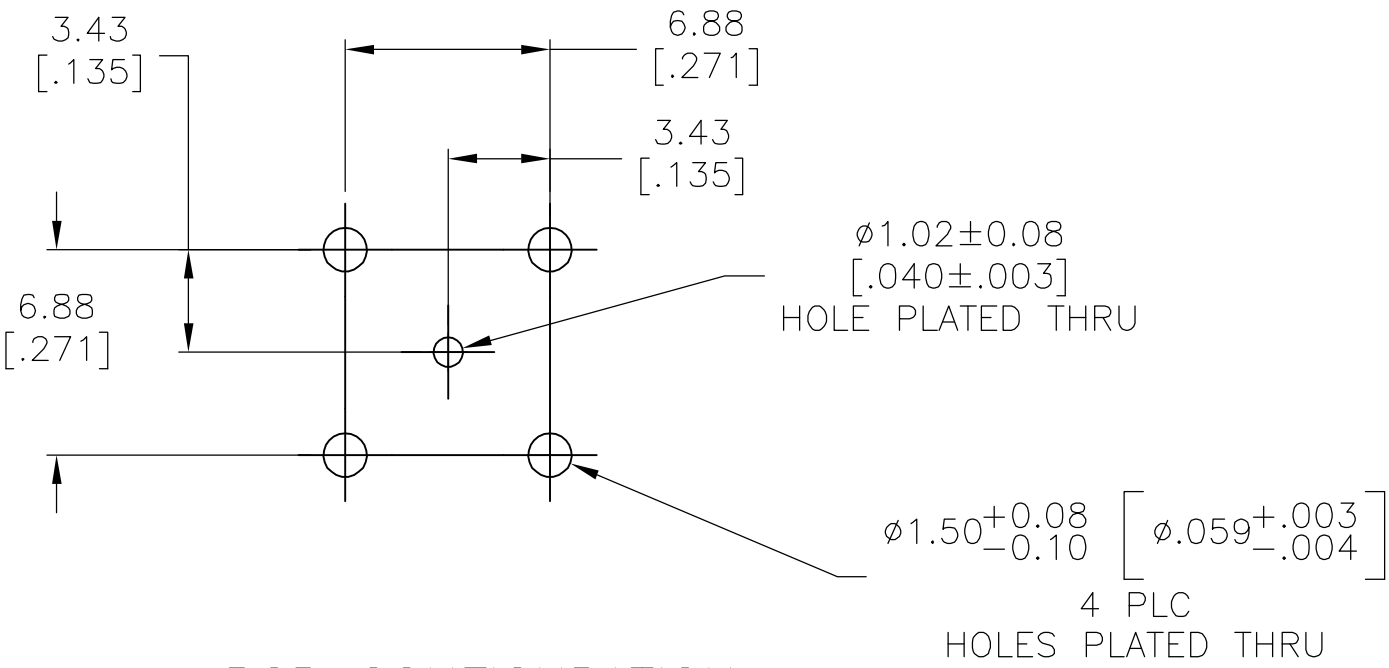


LOC	DIST	REVISIONS				
AJ	00	P	LTR	DESCRIPTION	DATE	DWN
			N	REV PER ECO 07-002853	21MAR2007	JL

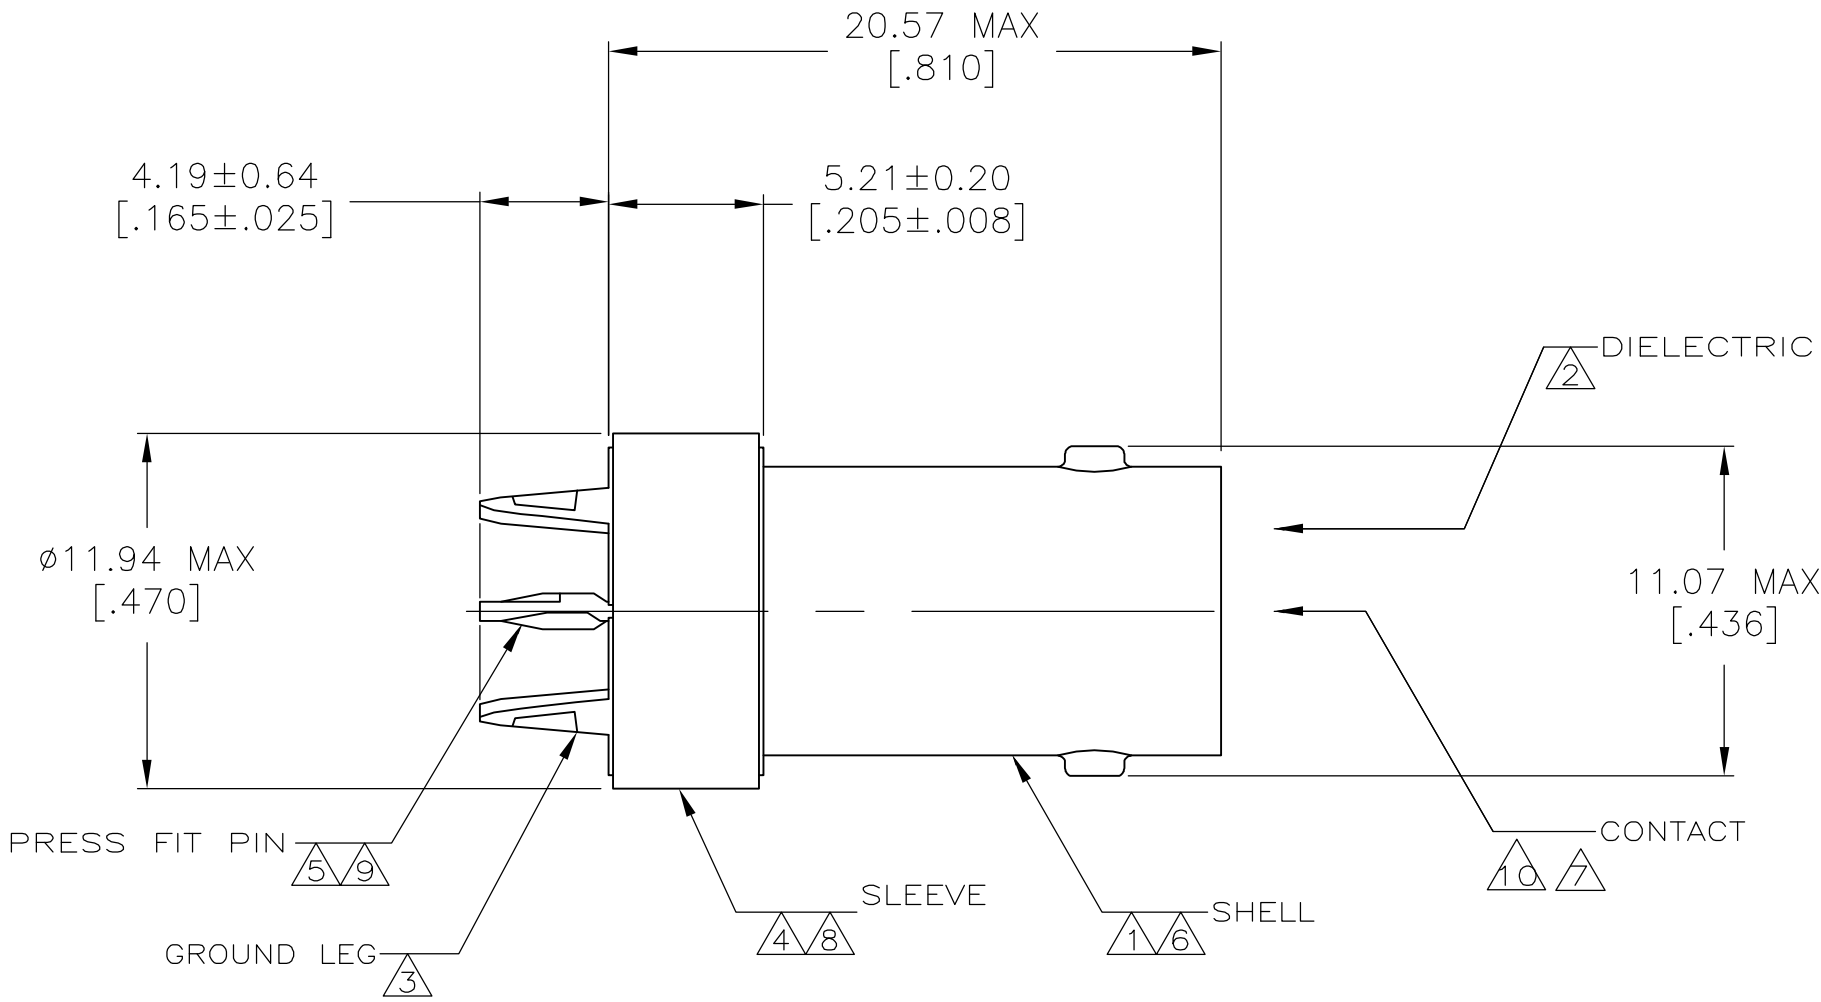

- 1 ZINC PER QQ-Z-363.
 - 2 PTFE PER MIL-P-19468.
 - 3 COPPER-IRON ALLOY PER ASTM-B-465.
 - 4 COPPER PER QQ-C-576.
 - 5 COPPER-NICKEL ALLOY PER ASTM-B-122.
 - 6 NICKEL PLATE PER QQ-N-290
3.81 μm [.000150] MINIMUM THICK.
 - 7 GOLD PLATE PER MIL-G-45204
0.76 μm [.000030] MINIMUM THICK.
 - 8 TIN PLATE PER ASTM-B-545,
2.54 μm [.000100] MIN THICK.
 - 9 GOLD PLATE PER MIL-G-45204
 - 10 BERYLLIUM COPPER PER ASTM-B-643
 - 11 .010±.001 THICK, MYLAR (POLYESTER FILM) INSULATOR, AMP P/N 1274912-1, ATTACHED TO BOTTOM, (NOT SHOWN).
 - 12 TIN-LEAD PLATE PER ASTM-B-545,
2.54 μm [.000100] MIN THICK.
13. CONNECTOR PRESS FIT IS DESIGNED TO PROVIDE 100 LB. MINIMUM AXIAL RETENTION TO PCB COMPLIANT WITH TYCO APPLICATION SPEC 114-12001. AS A RESULT, DEFORMATION OF PLATED THROUGH HOLES WILL OCCUR. CUSTOMER VALIDATION AND ACCEPTANCE OF THIS DEFORMATION IS RECOMMENDED PRIOR TO SPECIFYING USE OF THIS PRODUCT.

OBSOLETE	8	9-222462-0
	11	222462-4
	12	222462-2
	12	222462-1
GROUND LEG		PART NUMBER

SUPERSEDED BY 222462-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. LIPPERT 05MAR01	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: mm [INCHES]		CHK D. TAYLOE 8-2-93				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.05 [.002] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC			
	FINISH		APPLICATION SPEC			
MATERIAL		APVD J. LIPPERT 8-5-93	108-12103			
1 THRU 5,10,11		WEIGHT -	114-12001			
6 THRU 10,12		CUSTOMER DRAWING		SIZE A2	CAGE CODE 00779	DRAWING NO C=222462
				SCALE 5:1	SHEET 1 of 1	REV N