

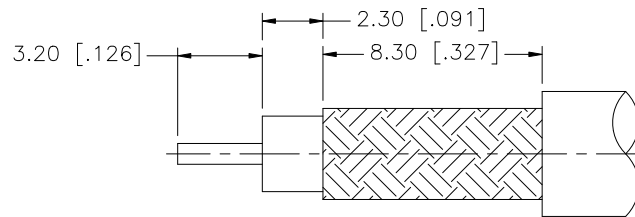
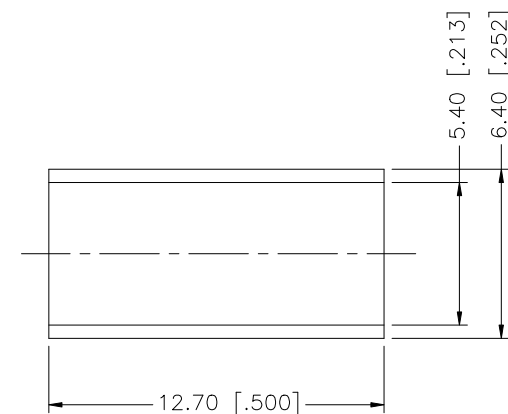


REV.	DATE	DESCRIPTION
NC	05/31/96	INITIAL RELEASE
A	07/31/07	UPDATE DRAWING FORMAT

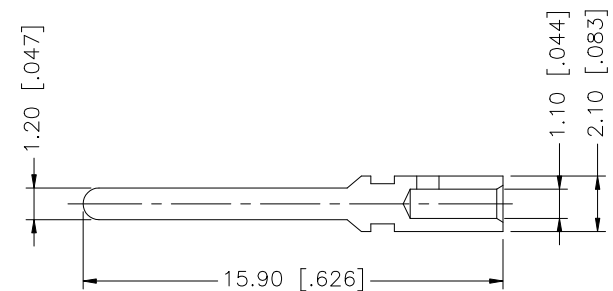

RECOMMENDED CABLE
STRIPPING DIMS

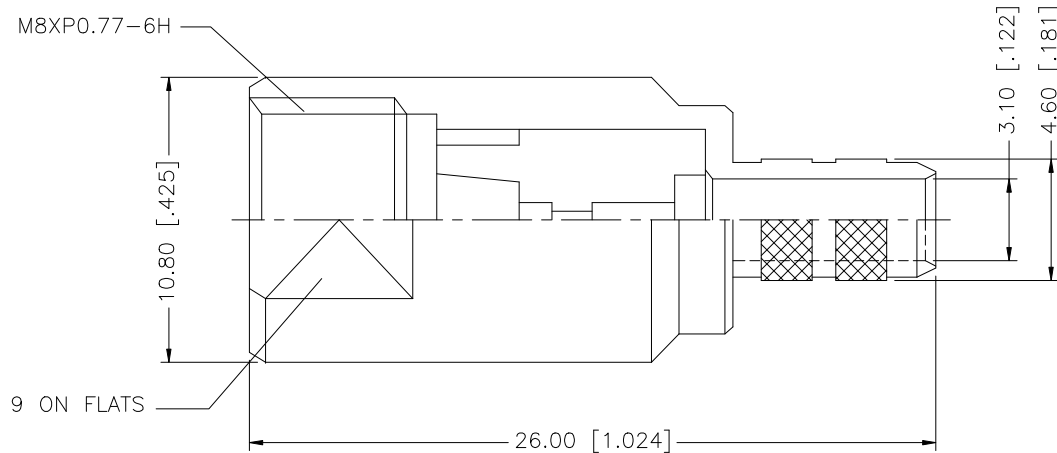

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	G.R.S.	07/31/07						
7						CHECKED								
6						ISSUED				PART DESCRIPTION FME CRIMP PLUG (FOR RG–58C/U CABLE)				
5						SHEET	1 OF 1							
4	FERRULE	COPPER	NICKEL	1		PART NO. 192100								
3	CONTACT PIN	BRASS	GOLD	1		CAD FILE		DWG. NO. 192100.DWG						
2	INSULATOR	TEFLON	NATURAL	1		C:/192/192100.DWG								
1	BODY	BRASS	NICKEL	1				REV.	A	SIZE	A	SCALE	NA	
	DESCRIPTION	MATERIAL	FINISH	QTY										