



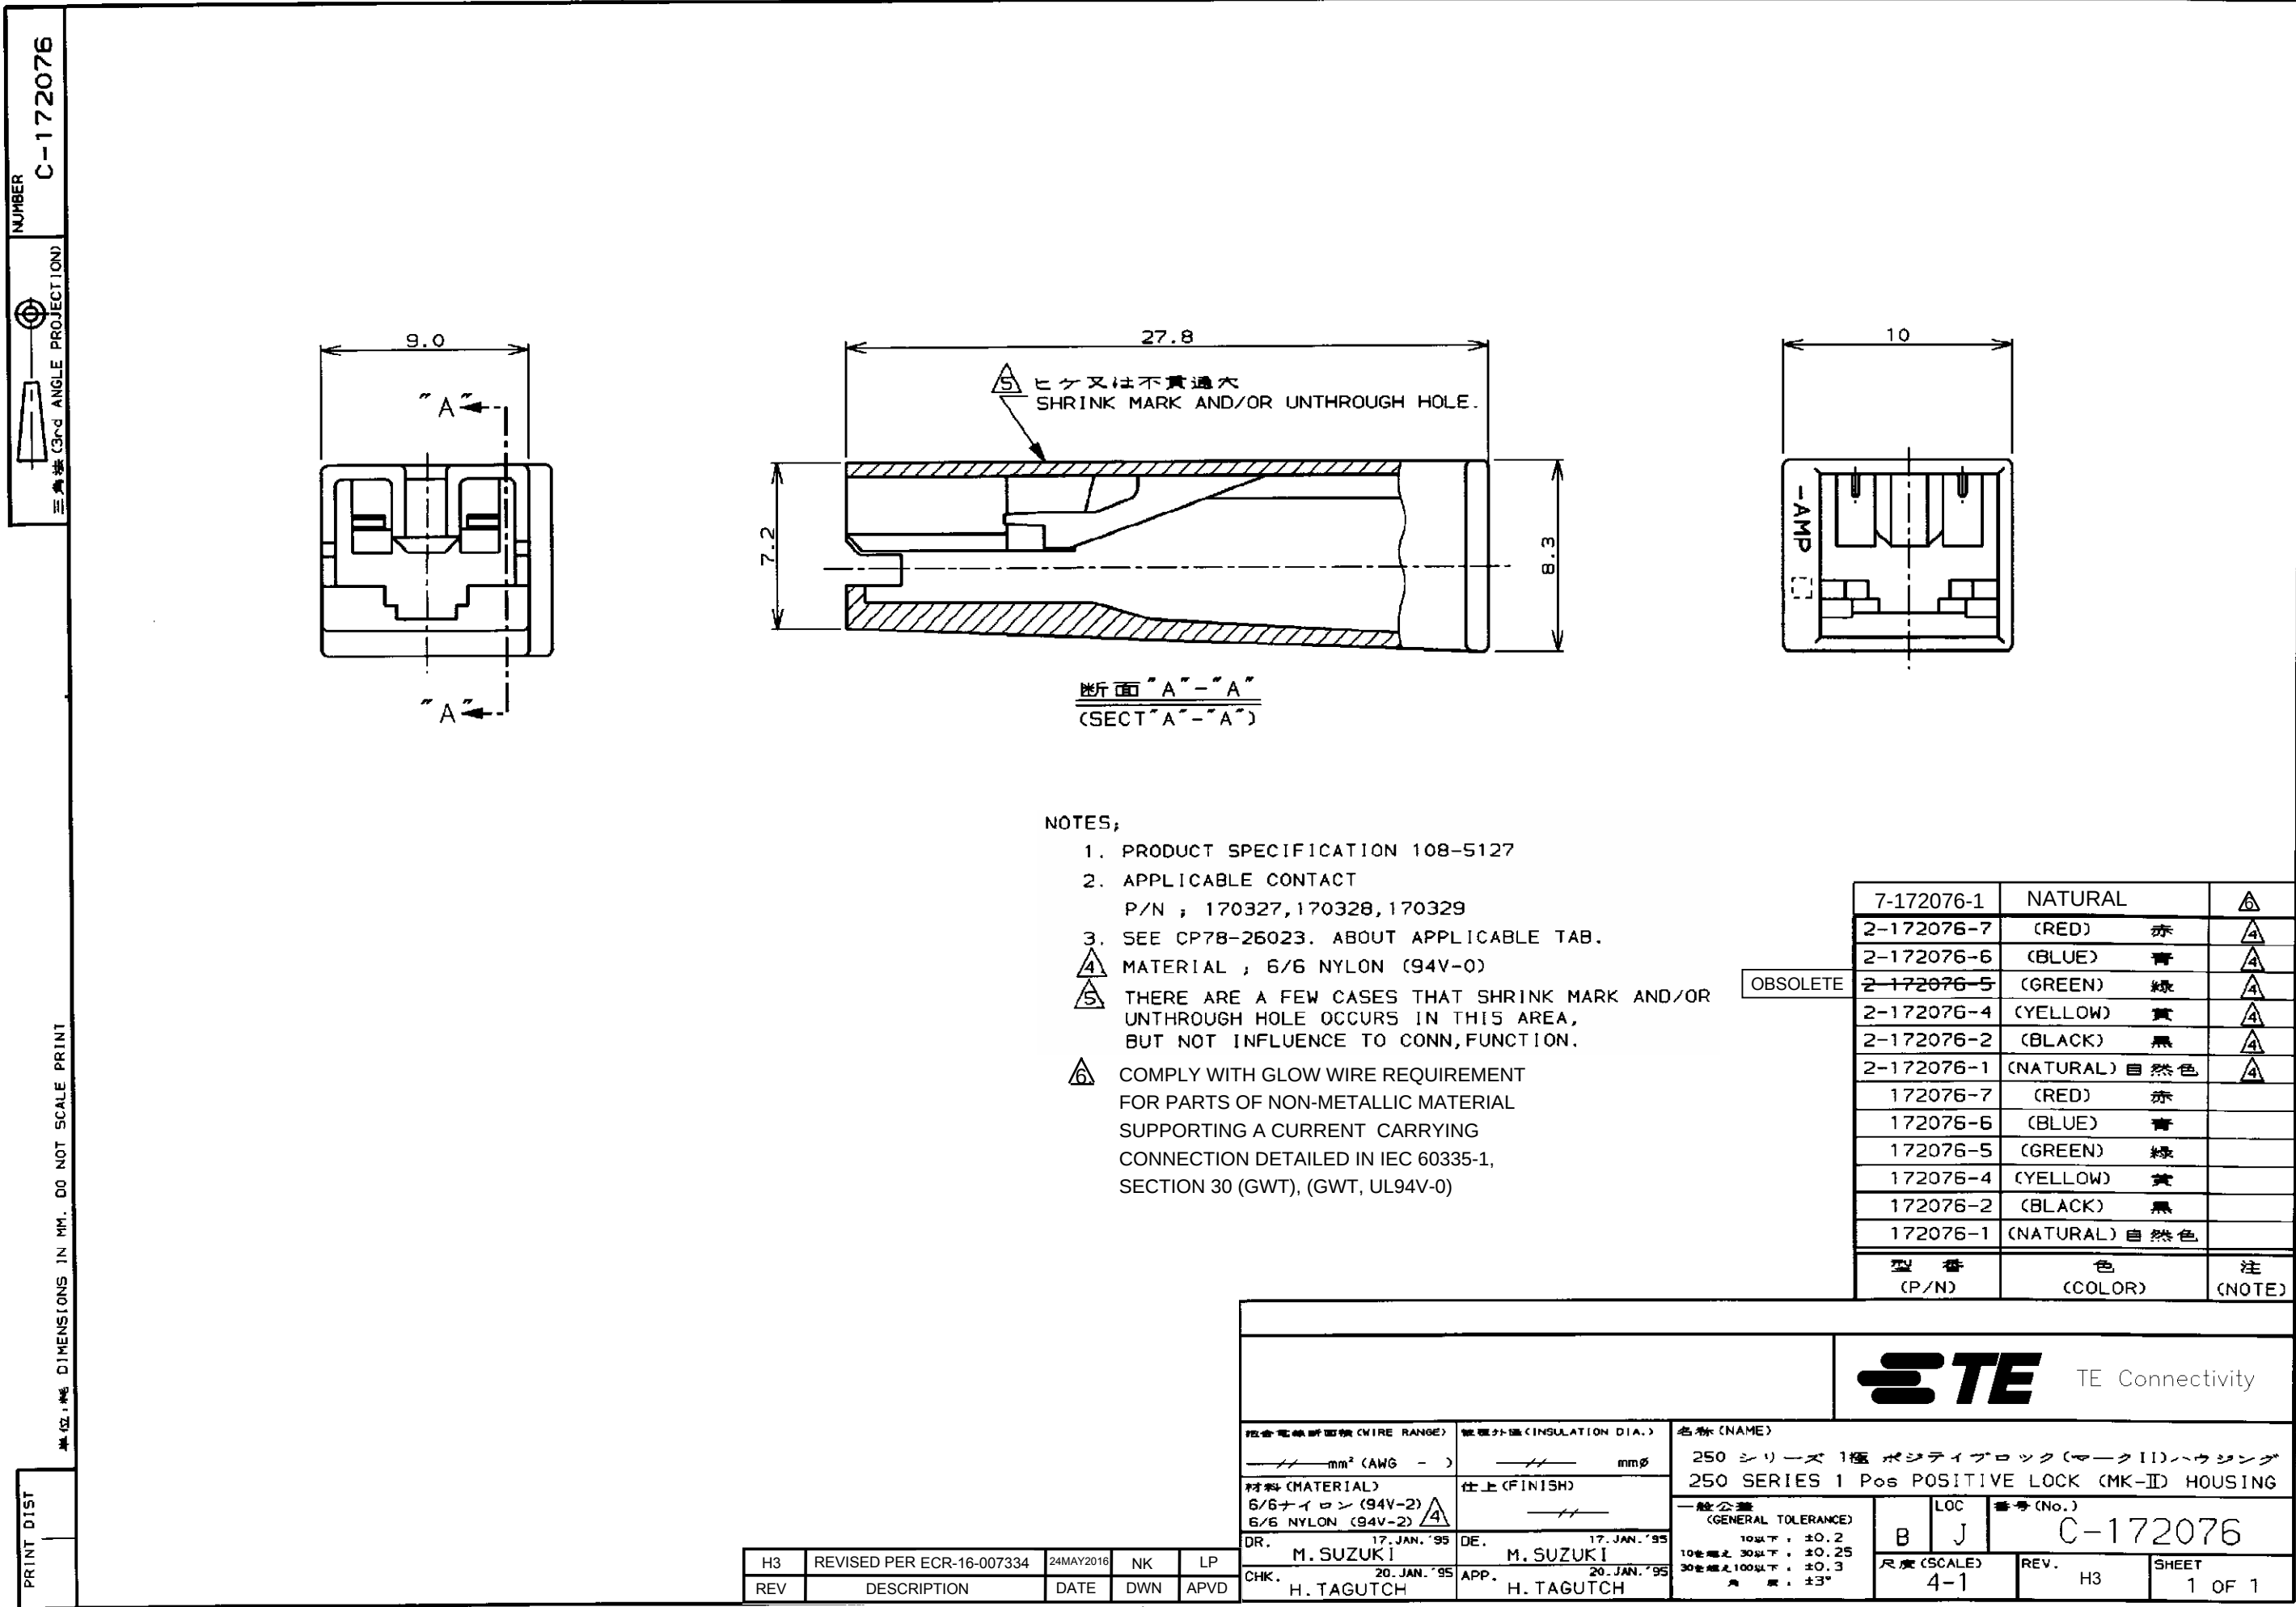

NUMBER C-172076



単位: mm DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DIST

- NOTES,
1. PRODUCT SPECIFICATION 108-5127
2. APPLICABLE CONTACT
P/N ; 170327,170328,170329
3. SEE CP78-26023. ABOUT APPLICABLE TAB.
4 MATERIAL ; 6/6 NYLON (94V-0)
5 THERE ARE A FEW CASES THAT SHRINK MARK AND/OR UNTHROUGH HOLE OCCURS IN THIS AREA, BUT NOT INFLUENCE TO CONN,FUNCTION.
6 COMPLY WITH GLOW WIRE REQUIREMENT FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), (GWT, UL94V-0)

OBSOLETE

Table with 3 columns: Part Number, Color, and Note. Rows include 7-172076-1 (NATURAL), 2-172076-7 (RED), 2-172076-6 (BLUE), 2-172076-5 (GREEN), 2-172076-4 (YELLOW), 2-172076-2 (BLACK), and 2-172076-1 (NATURAL).



Table with 4 columns: Wire Range, Insulation Dia., Name, and General Tolerance. Includes fields for material (6/6 NYLON), finish, and dimensions.

Table with 5 columns: H3, REV, DESCRIPTION, DATE, DWN, APVD. Includes revision history for M. Suzuki and H. Tagutch.