



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISE MT FERRULE ILLUSTRATION	20NOV2014	KG	DW
	A2	ECR-15-010353	16JUL2015	KG	DW

D

C


B

A

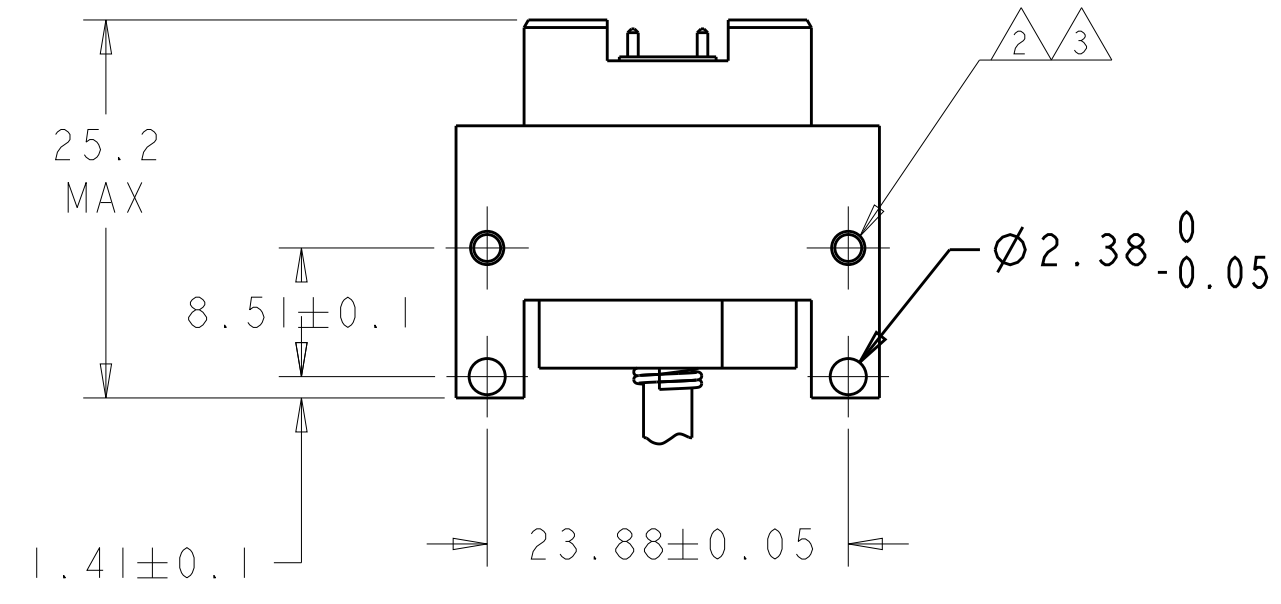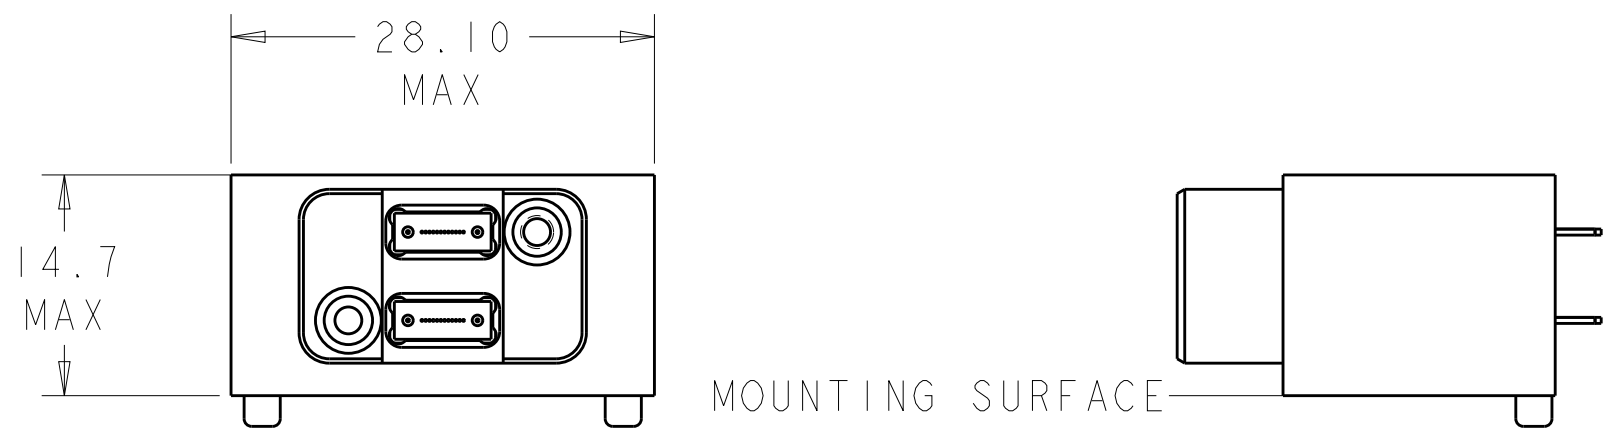

ASSEMBLED VIEW
WITH REFERENCE
MT CABLE ASSEMBLIES INSTALLED

- 1 AREA REQUIRED FOR CONNECTOR PLACEMENT.
- 2 2-56 X 3/8" SCREWS WITH A PRE-APPLIED NYLOK PATCH ARE INCLUDED FOR PC-BOARD MOUNTING (NOT SHOWN). IF A PC-BOARD THICKER THAN 5.8mm IS USED LONGER SCREWS ARE REQUIRED.
- 3 RECOMMENDED TORQUE: 0.23-0.34 N-m [2-3 in-lb].
- 4 DATUM A REFERENCE PER ANSI/VITA 46.0-2007, APPENDIX C.
- 5 HOUSING & RETAINER PLATE:
ALUMINUM ALLOY 6061 PER ASTM B209, OR ASTM B221.
CAPTIVE SCREWS & BHCS: STAINLESS STEEL, 300 SERIES.
- 6 HOUSING & RETAINER PLATE:
CLEAR CHROMATE CONVERSION COATING.
CAPTIVE SCREWS & BHCS: PASSIVATED.
- 7 DATE CODE: YEAR & WEEK (YYWW).
- 8 THE MODULE CONNECTOR KIT, CONSISTING OF THE HOUSING, RETAINER PLATE WITH CAPTIVE SCREWS, AND 2-56 SCREWS, IS SHIPPED UNASSEMBLED.
- 9 SINGLE-ENDED FIBER-OPTIC (PIGTAIL) CABLE ASSEMBLIES ARE AVAILABLE SEPARATELY, 1938401-2.
- 10 UNASSEMBLED FIBER-OPTIC COMPONENTS KITS ARE AVAILABLE SEPARATELY, 2102866-2.
- 11 TE CONNECTIVITY PRODUCT IDENTIFIER.

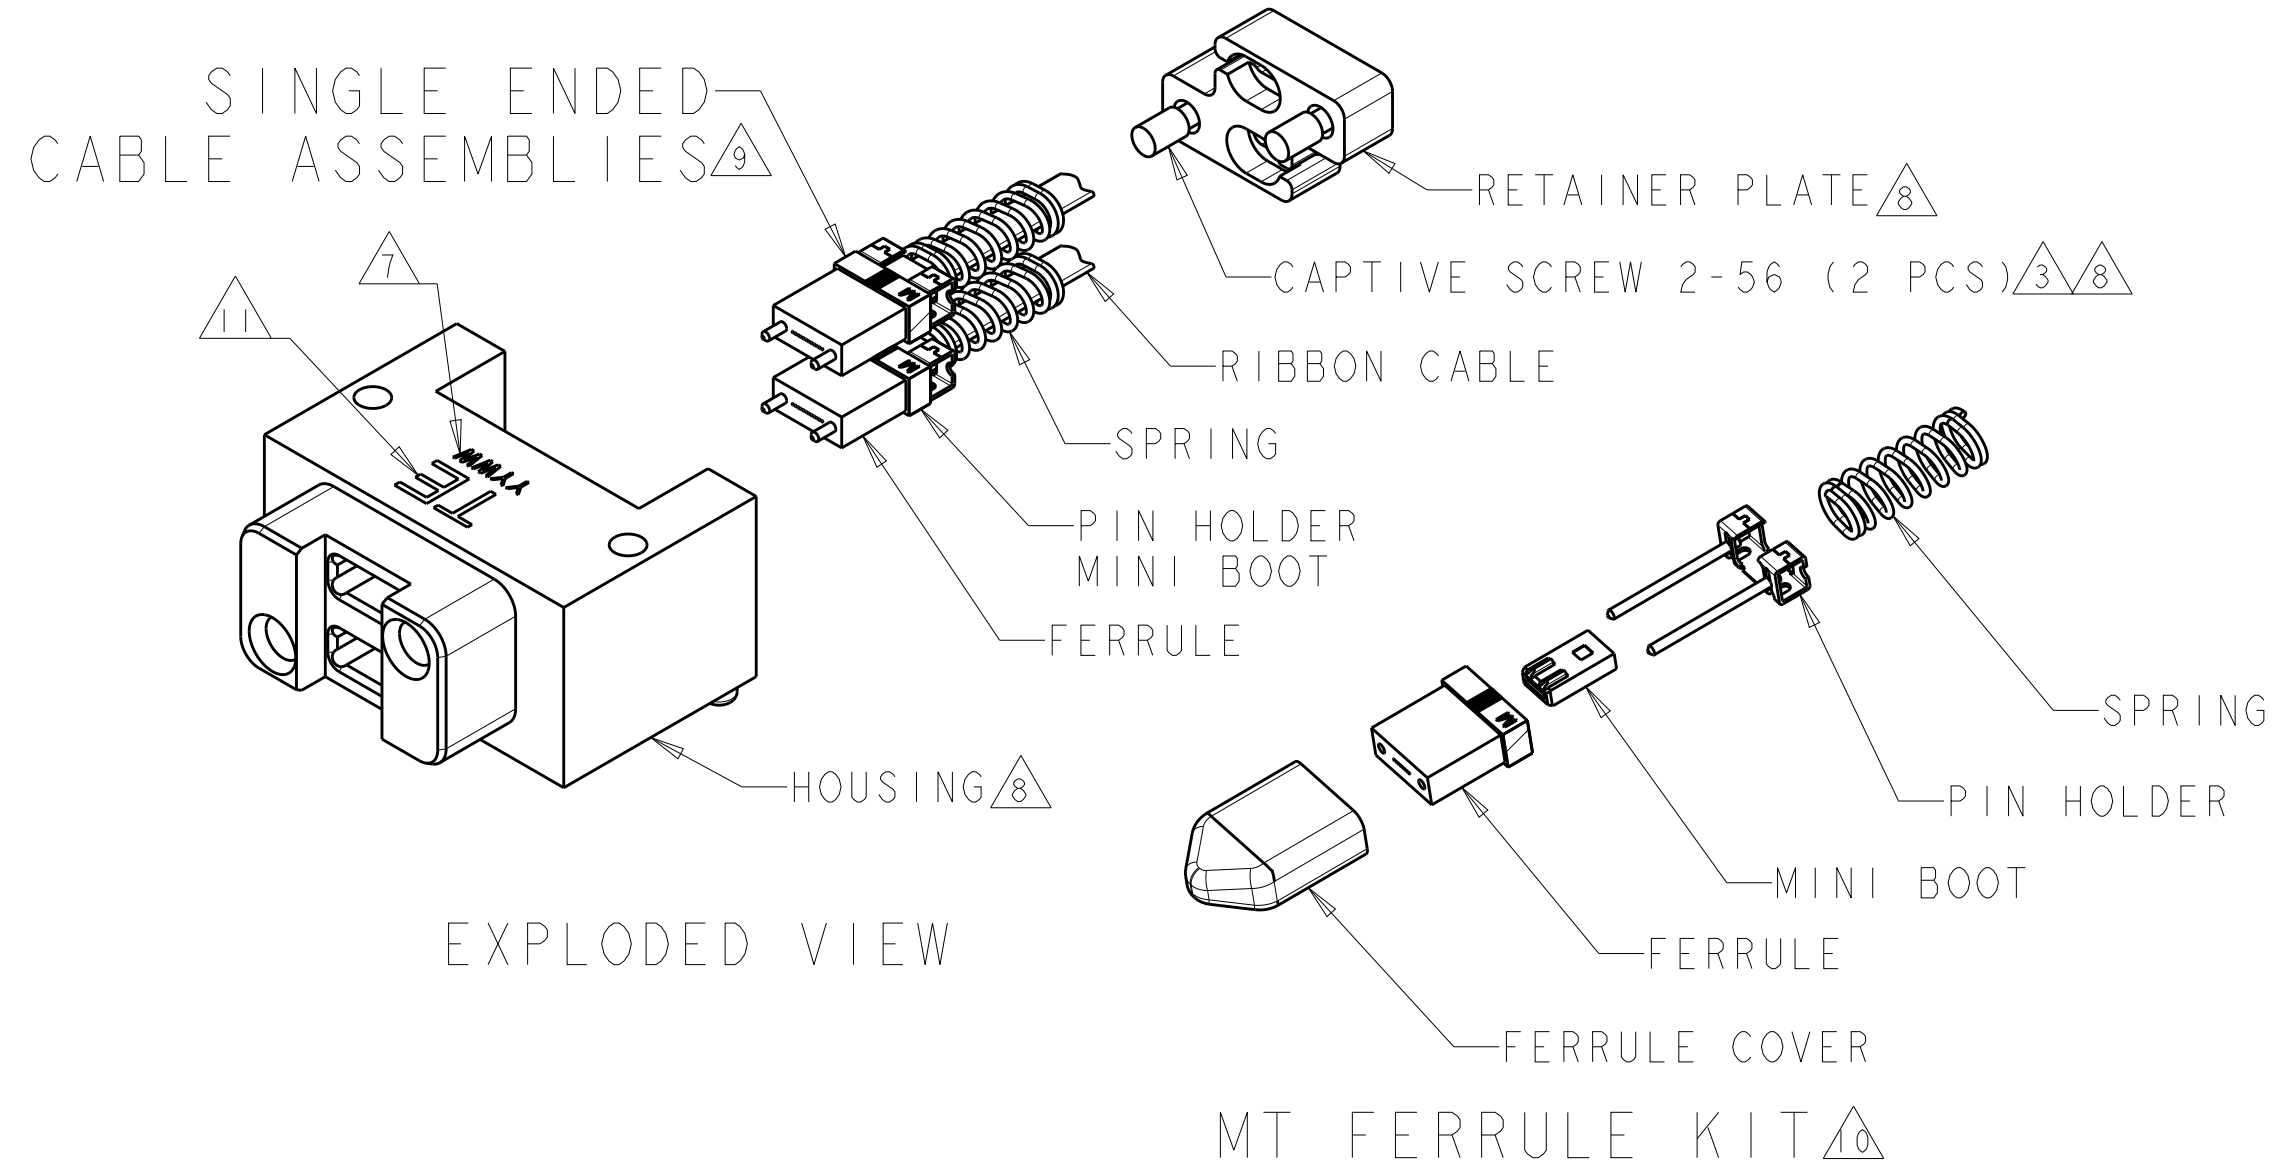

EXPLODED VIEW

PLUG (MODULE) KIT		A	2000974-1
COMMENT		PART REVISION	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		TE Connectivity	
		CONNECTOR KIT, PLUG, (MODULE) FIBER OPTIC, MT, VITA 66.1-STYLE	
DIMENSIONS: mm		SIZE	CAGE CODE
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWING NO	RESTRICTED TO
0 PLC ±		A200779	-
1 PLC ±		©-2000974	-
2 PLC ±		SCALE	SHEET
3 PLC ±		3:1	1 2
4 PLC ±		Customer Drawing	REV
ANGLES			A2
FINISH			

