
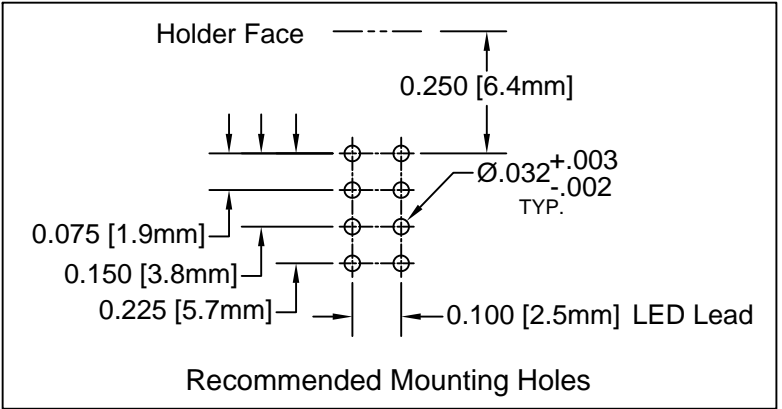


ITEM	QTY	PART NUMBER	PART DESCRIPTION
1	1	H-455C	T-1 (3mm) Quad-Level LED Holder, 90° Mount
2	4	3BC	T-1 (3mm) Non-Flange LED Bi-Colors

REV.	DESCRIPTION	DATE	APPROVED
A	Engineering Release	01/03/06	M. C.
B	Added BH-340 to BOM	08/17/07	M. C.
C	Removed BH-340 and Updated Data	10/27/10	T. Y.
D	Engineering Update w/o Changes	08/04/16	J. C.

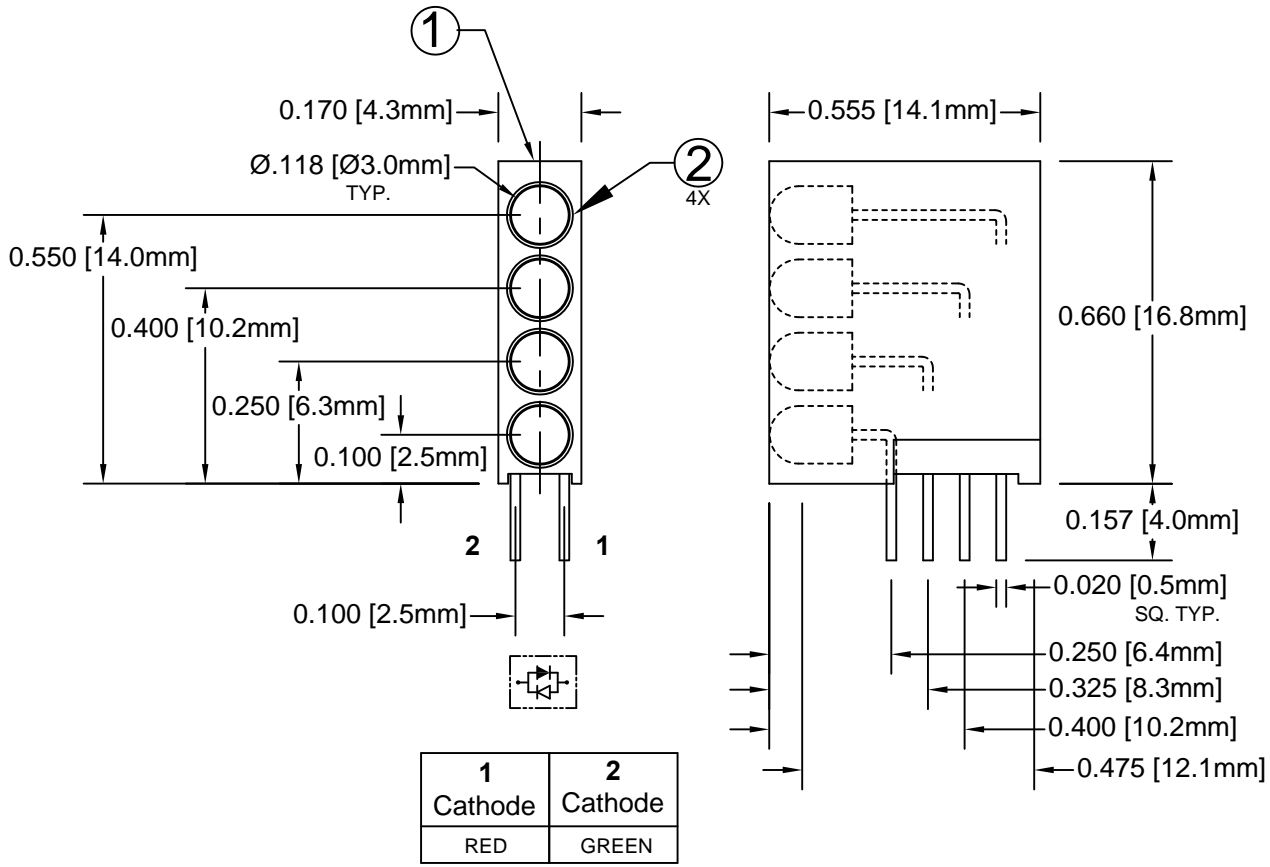

1	2
Cathode	Cathode
RED	GREEN

LED Part No.	Chip			Lens Appearance	Absolute Max. Ratings				Electro-Optical Data @ 20mA			Viewing Angle (Deg)
	Material	Peak Wave Length λ_p (nm)	Emitted Color		$\Delta\lambda$ (nm)	Pd (mW)	If (mA)	Peak If (mA)	Vf (V)		Iv (mcd)	
									TYP	MAX	TYP	
3BC	GaAsP/GaP	625	HE RED	-	80	30	150	2.0	2.8	6	45	
	GaP/GaP	568	GREEN	-	80	30	150	2.1	2.8	6		

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

- REVERSE VOLTAGE _____ 5V
- REVERSE CURRENT (VR=5V) _____ 100 μ A
- OPERATING TEMPERATURE RANGE _____ -25°C ~ 85°C
- STORAGE TEMPERATURE _____ -30°C ~ 100°C
- LEAD SOLDERING TEMPERATURE (1/16" FROM BODY) _____ 260°C for 5 Seconds

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
DECIMALS	ANGULAR		
.X \pm .1	X° \pm 1°		
.XX \pm .02		 TITLE: T-1 (3mm) SINGLE STATION 90° QUAD-LEVEL ASSEMBLY	
.XXX \pm .010			
DESIGNED:	DATE:	PART NO: H455CBC CAGE CODE : 32559	REVISION:
S. Dam	01/03/06		D
CHECKED:	DATE:	SHEET # 1 OF 1 CAD GENERATED DOCUMENT. DO NOT MEASURE DRAWING.	
T. Yin	01/03/06		