
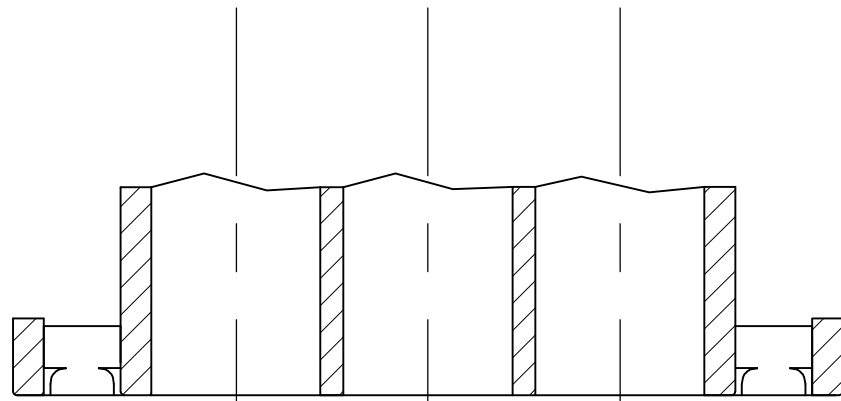



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
CM	00		AL1	REVISED PER ECR-17-008392	26JUN2017	BW KR

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
2. SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
3. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.




- △4 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- △5 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- △6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

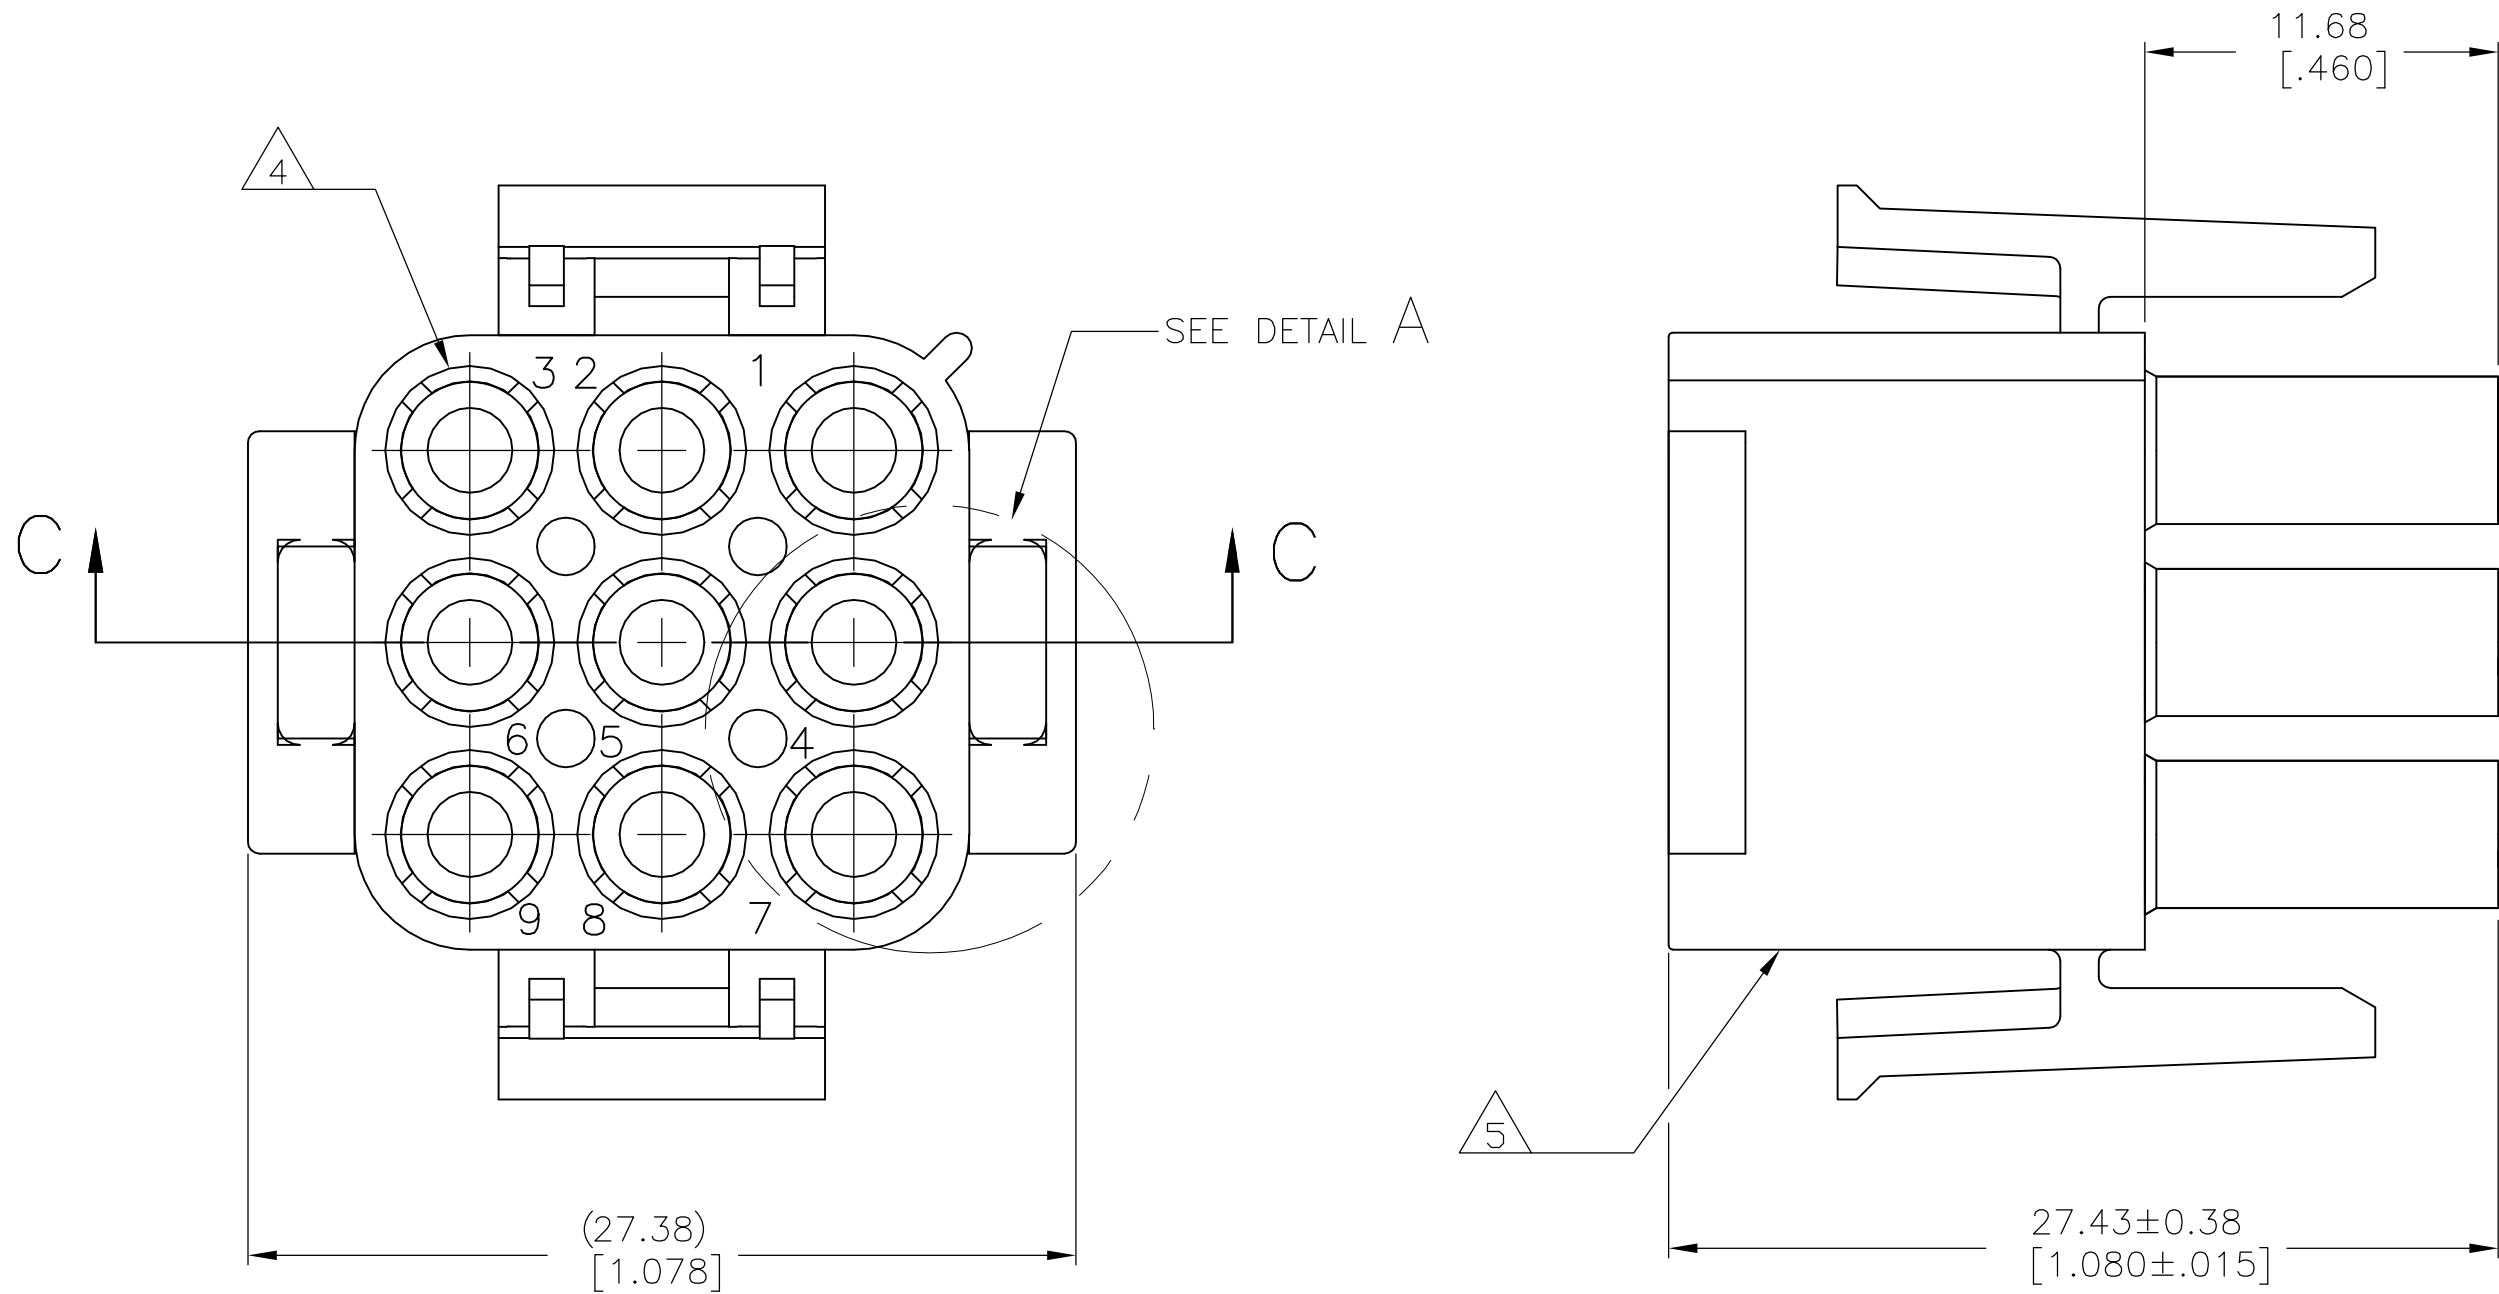


PARTIAL SECTION C-C

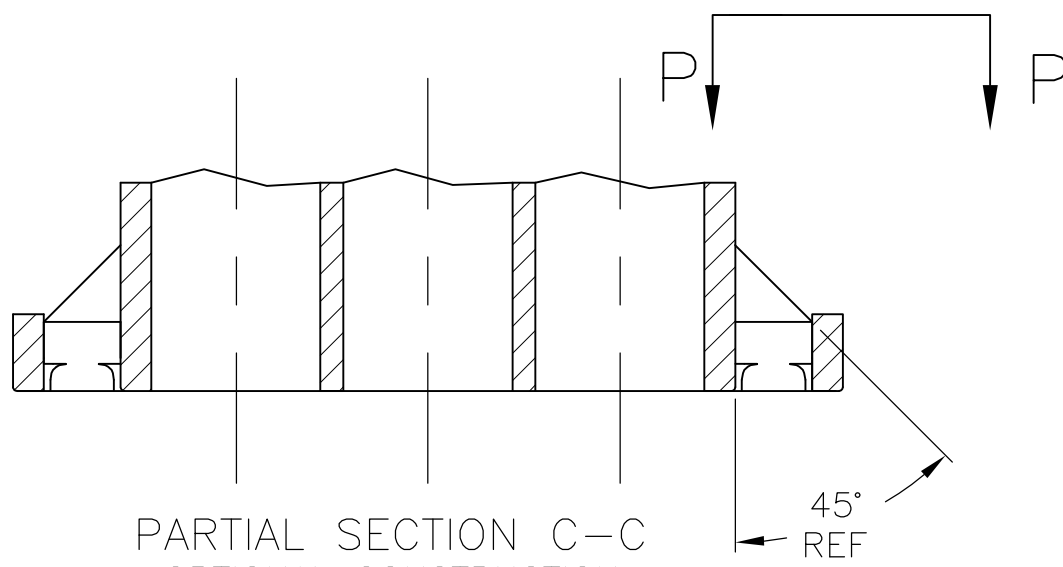

PARTIAL SECTION C-C
OPTIONAL CONSTRUCTION

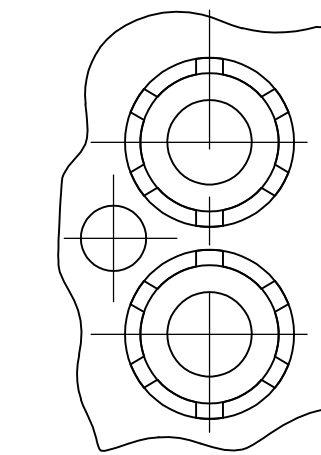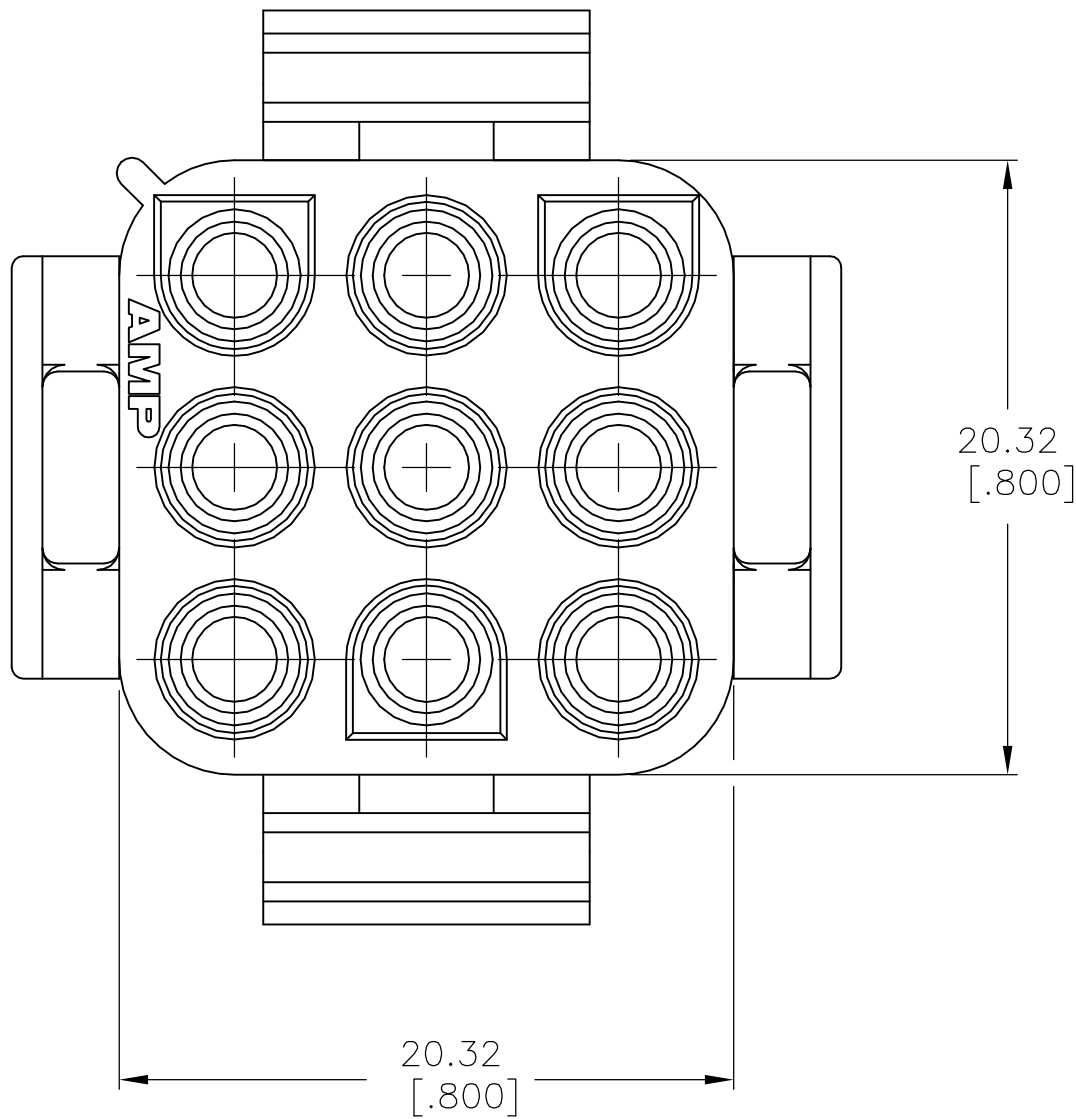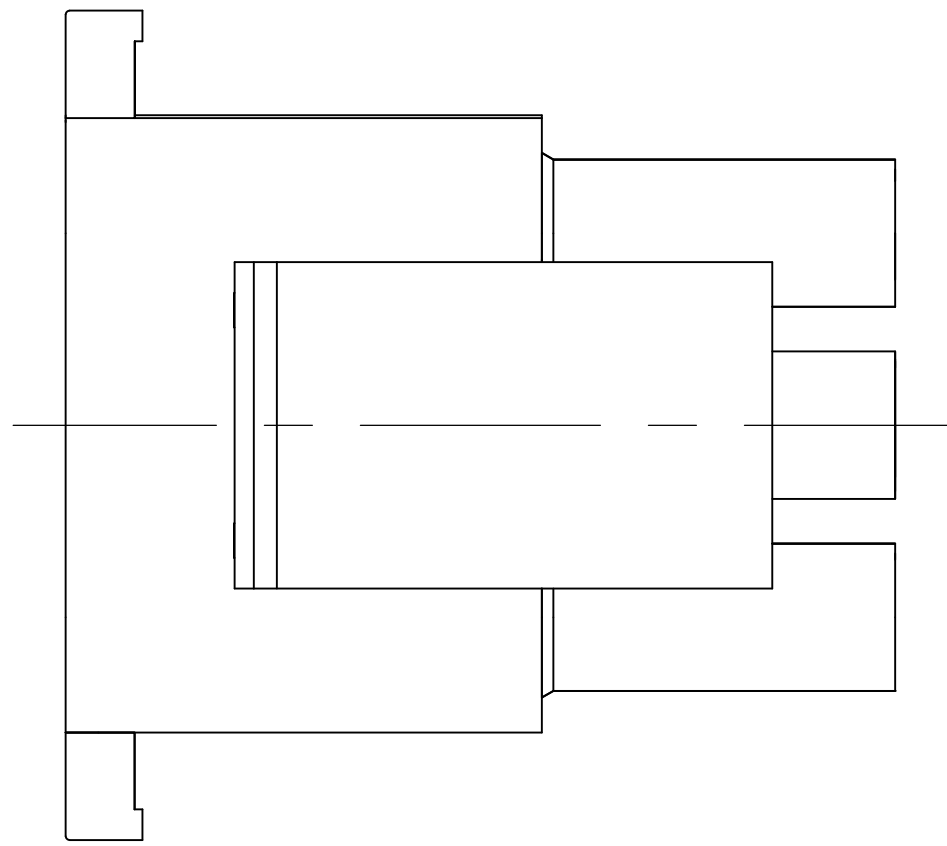


PARTIAL DETAIL A
OPTIONAL CONSTRUCTIONS

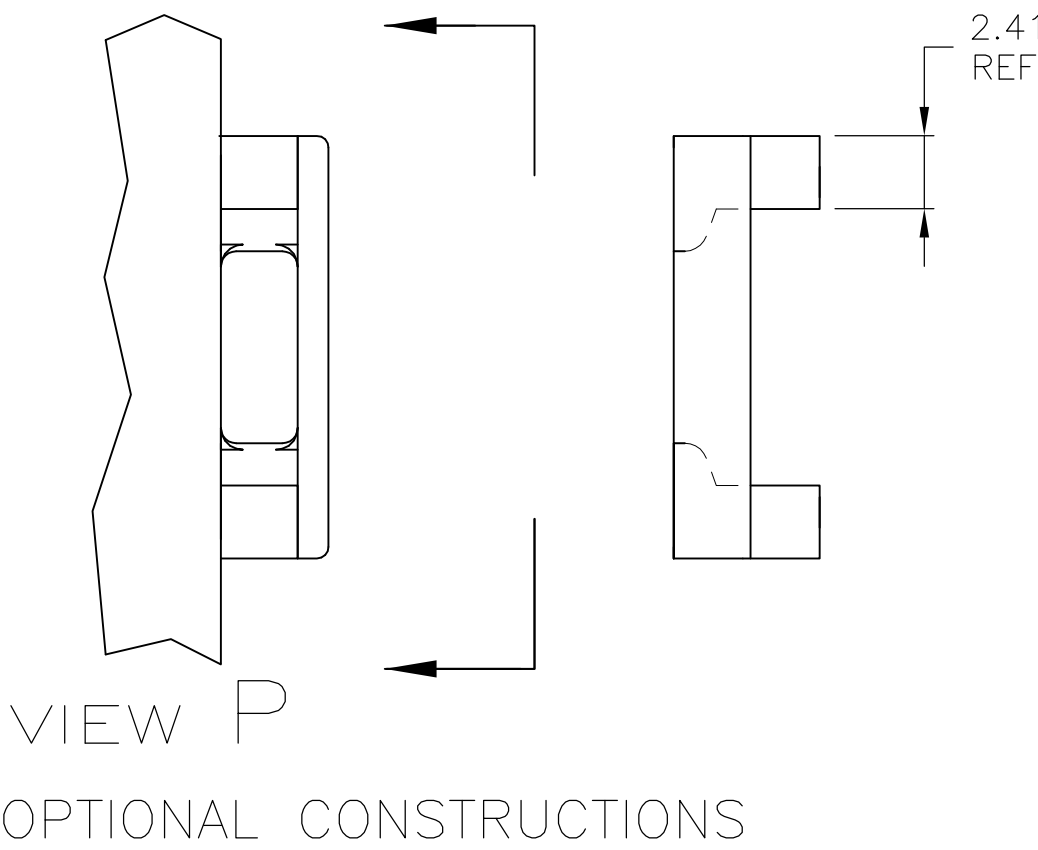


VIEW P
OPTIONAL CONSTRUCTIONS

△6 SUPERCEDED BY 1-480706-0	△6 OBSOLETE	BLACK	1-480706-9
		GRAY	1-480706-8
		BLUE	1-480706-6
		GREEN	1-480706-5
		YELLOW	1-480706-4
		ORANGE	1-480706-3
		RED	1-480706-2
		BROWN	1-480706-1
		NATURAL	1-480706-0
		COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 01SEP04	 TE Connectivity						
		CHK S. RIDGILL 01SEP04							
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S. RIDGILL 01SEP04	NAME	PLUG, 9 CIRCUIT, UNIVERSAL MATE-N-LOK™					
		PRODUCT SPEC							
	0. PLC ± - 1. PLC ± - 2. PLC ± 0.13 [.005] 3. PLC ± - 4. PLC ± - ANGLES ± 0°30'	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
		WEIGHT					A1 00779 C=480706	-	
MATERIAL NYLON, UL94V-2		FINISH -	CUSTOMER DRAWING	SCALE	4:1	SHEET			1 OF 2

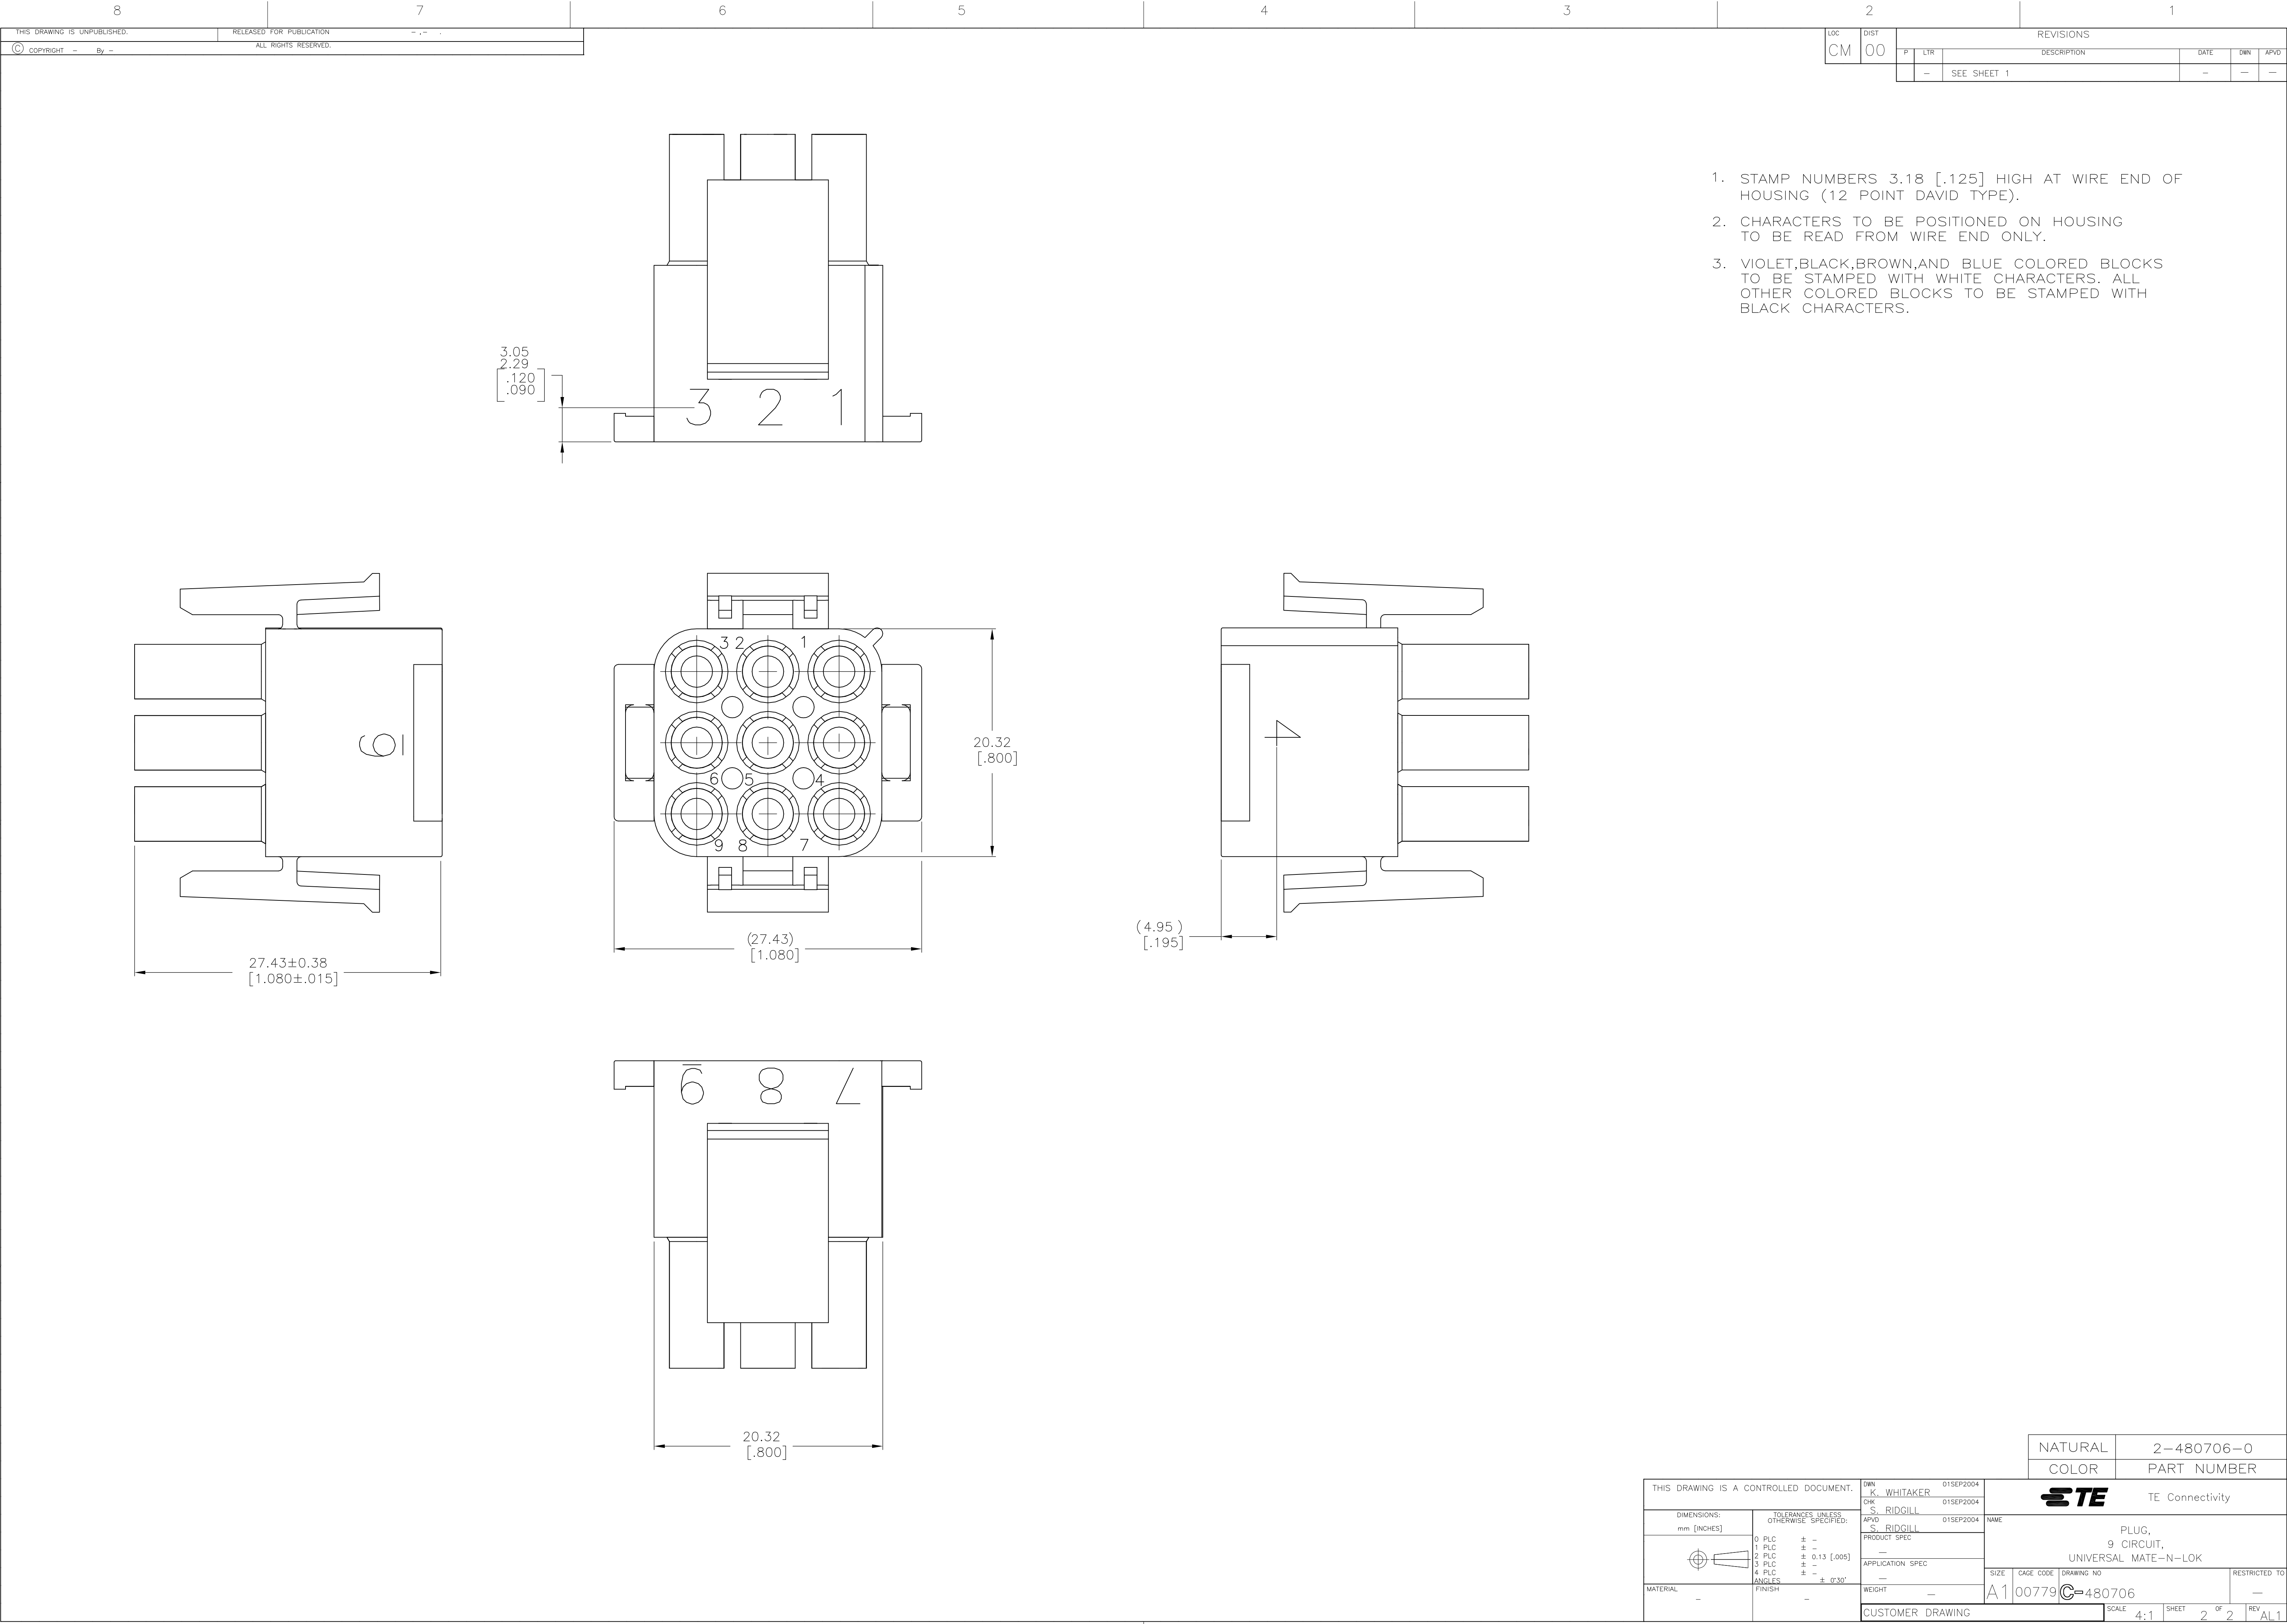

1. STAMP NUMBERS 3.18 [.125] HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE).
2. CHARACTERS TO BE POSITIONED ON HOUSING TO BE READ FROM WIRE END ONLY.
3. VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	01SEP2004	 TE Connectivity	
		CHK S. RIDGILL	01SEP2004		
		APVD S. RIDGILL	01SEP2004	NAME	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PLUG, 9 CIRCUIT, UNIVERSAL MATE-N-LOK	
		0 PLC ± .120		PRODUCT SPEC	
		1 PLC ± .120		APPLICATION SPEC	
		2 PLC ± 0.13 [.005]			
		3 PLC ± .120			
		4 PLC ± .120			
ANGLES		± 0°30'		SIZE	
FINISH		—		CAGE CODE	
MATERIAL		WEIGHT		DRAWING NO	
—		—		A1 00779	
		CUSTOMER DRAWING		C480706	
				RESTRICTED TO	
				—	
				SCALE 4:1 SHEET 2 OF 2 REV AL1	