

CATALOG LISTING

121EN188-R

PAGE 1 OF 1

REPLACES

SR-12343

RELEASE NO.

CHECK

7 MAR 01

SAV

CHECK

7 MAR 01

CSL

7 MAR 01





RASTER

DRAWN

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
121EN188-R

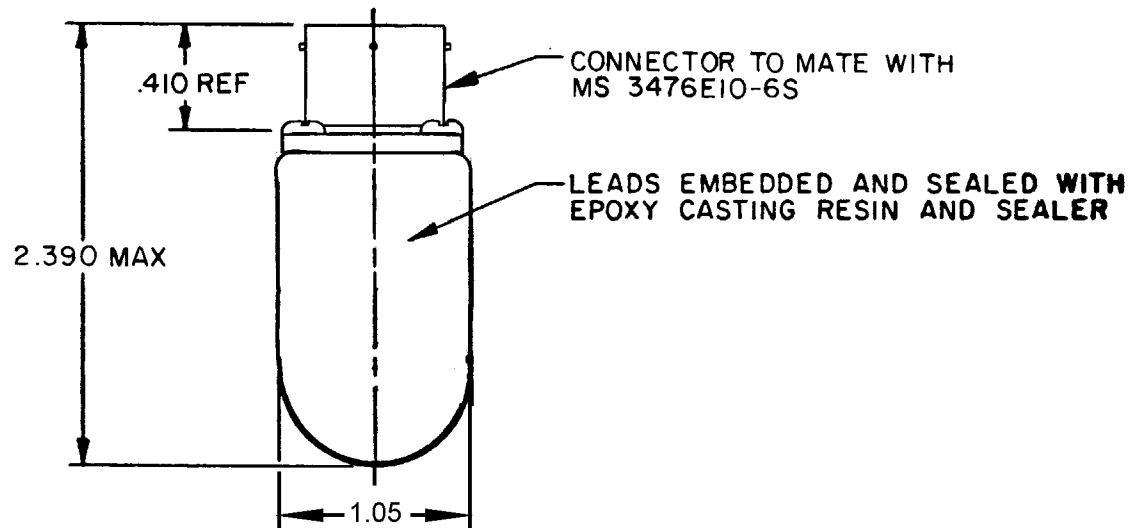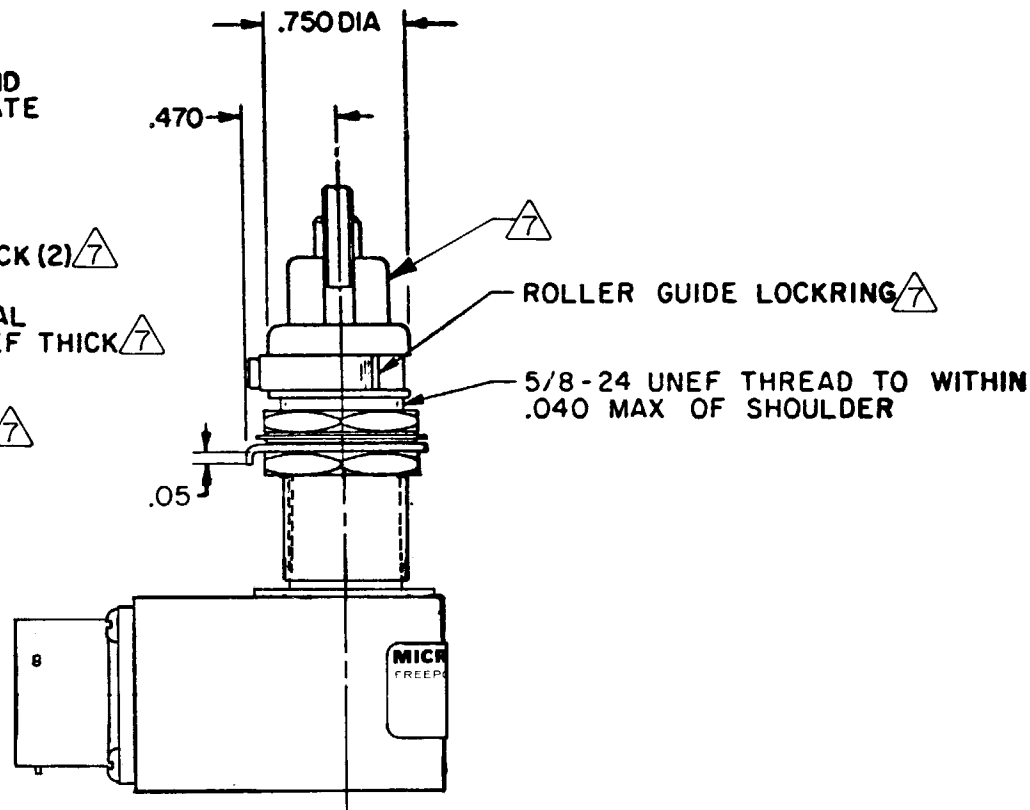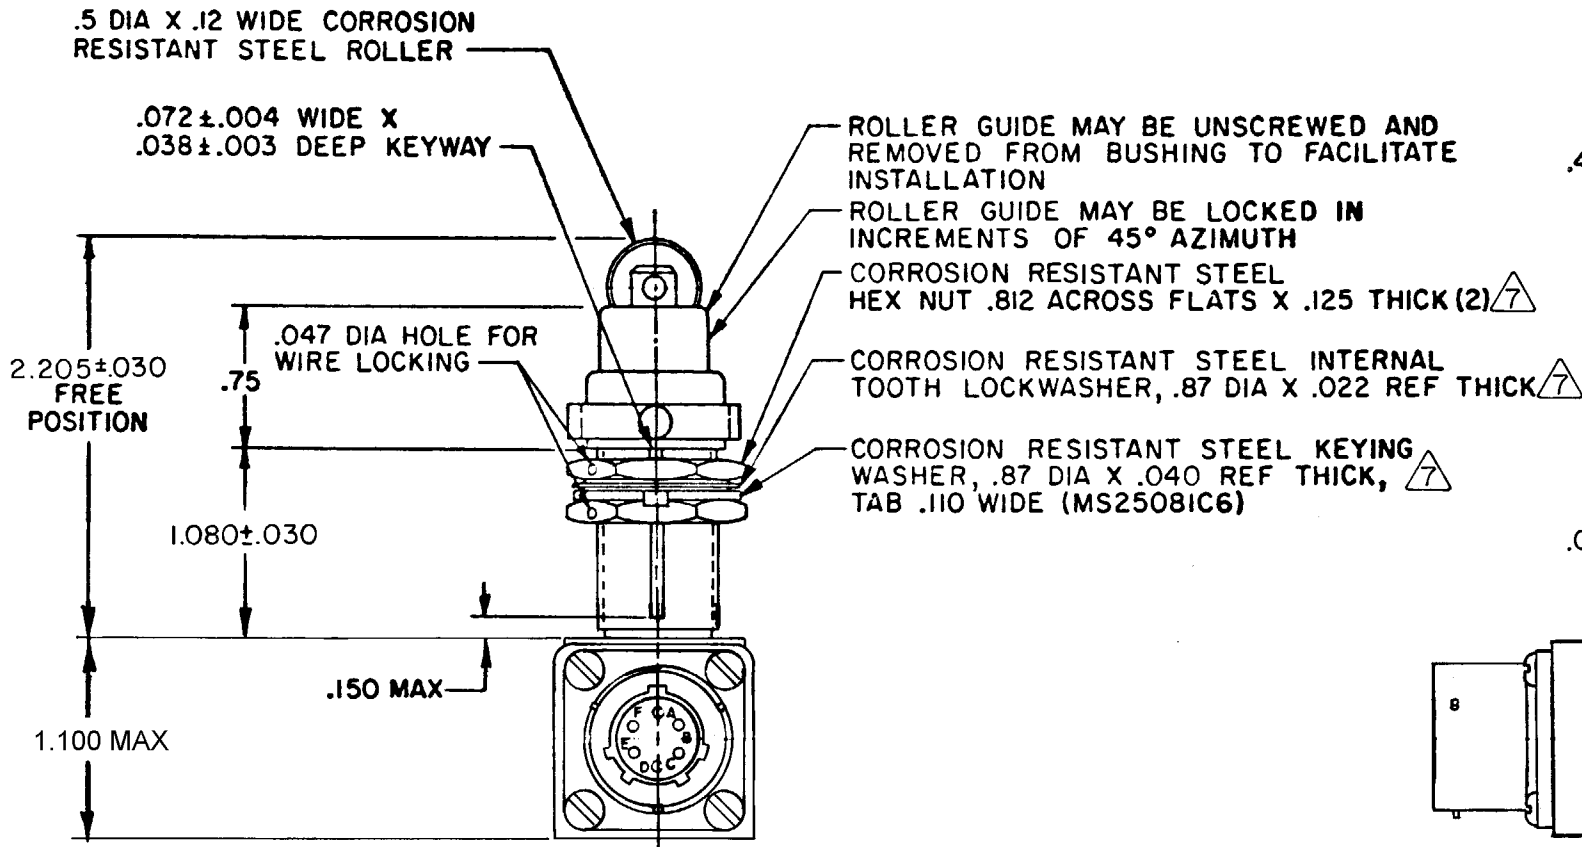


NOTES

- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
 - 3 - CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
 - 4 - TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING
SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING ROLLER GUIDE LOCK RING
 - 5 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
 - 6 - NOTED ELECTRICAL RATINGS APPLY AS SPECIFIED IN MIL-PRF-8805/40-1 UP TO 185°F
- 7 HARDWARE MAYBE PACKAGED UNASSEMBLED PER MIL-PRF-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT 6.5 OZ MAX

CHARACTERISTICS

OPERATING FORCE ----- 6-10 LB
FULL OVERTRAVEL FORCE ----- 30 LB MAX
RELEASE FORCE ----- 4 LB MIN
PRETRAVEL ----- .040 MAX
DIFFERENTIAL TRAVEL ----- .020 MAX
OVERTRAVEL ----- .250 MIN

ELECTRICAL DATA

LOAD	28 VDC	
	SEA LEVEL	50,000 FT.
RES	4	4
IND	2	2
MOTOR	4	