


PAGE 1/2


ISSUE 1321A

SERIES QLI



PART NUMBER R184339007

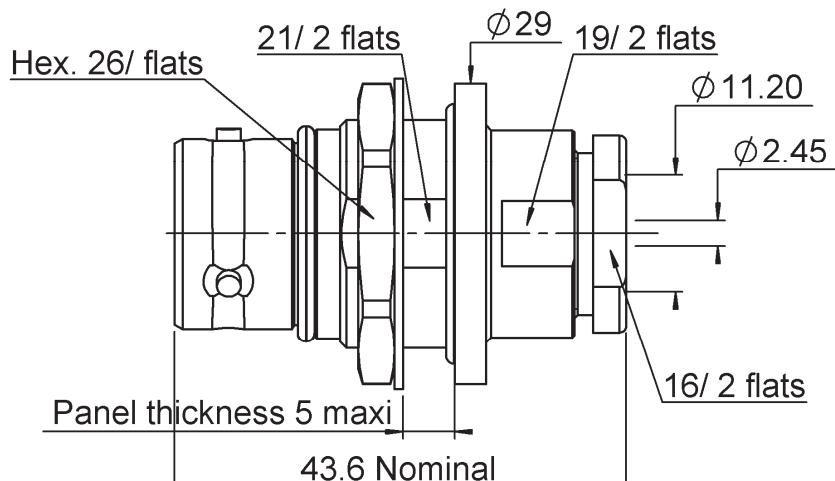

PANEL CUT OUT



mm	
Maxi	mini
22.2	22.1
21.2	21.1

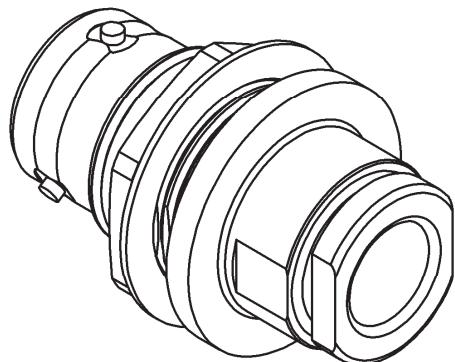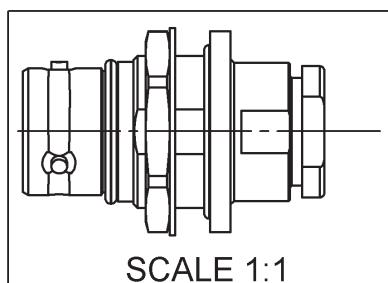

SCALE 1:1

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING. (μm)
Body	BRASS	
Center contact	BRASS	
Outer contact		
Insulator	PTFE	
Gasket	SILICONE RUBBER	
Others parts	BRASS	
-	-	
-	-	

PAGE 2/2

ISSUE 1321A

SERIES QLI

PART NUMBER R184339007

PACKAGING

Standard	Unit	Other
50	Contact us	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-6	GHz
VSWR	1.04	+ 0.02 x F(GHz) Maxi
Insertion loss	0.05	√F(GHz) dB Maxi
RF leakage	- (NA	- F(GHz)) dB Maxi
Voltage rating	1400	Veff Maxi
Dielectric withstanding voltage	2500	Veff mini
Insulation resistance	5000	MΩ mini

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating End	50	N mini
Axial force – Opposite end	30	N mini
Torque	NA	N.cm mini
Recommended torque		
Mating	NA	N.cm
Panel nut	500	N.cm
Clamp nut	800	N.cm
A/F clamp nut	16.00	mm
Mating life	100	Cycles mini
Weight	80.80	g

ENVIRONMENTAL

Operating temperature	-55~+120	°C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

SPECIFICATION

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	5	7.5	0	0	1.5	0

Assembly instruction: **Clamp 02**

Recommended cable(s)

KX 4
KX 13
RG 165
RG 213
RG 214
RG 225
RG 393

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off
- torque

300 N mini
NA N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.

OTHER CHARACTERISTICS

IP67 mated condition