
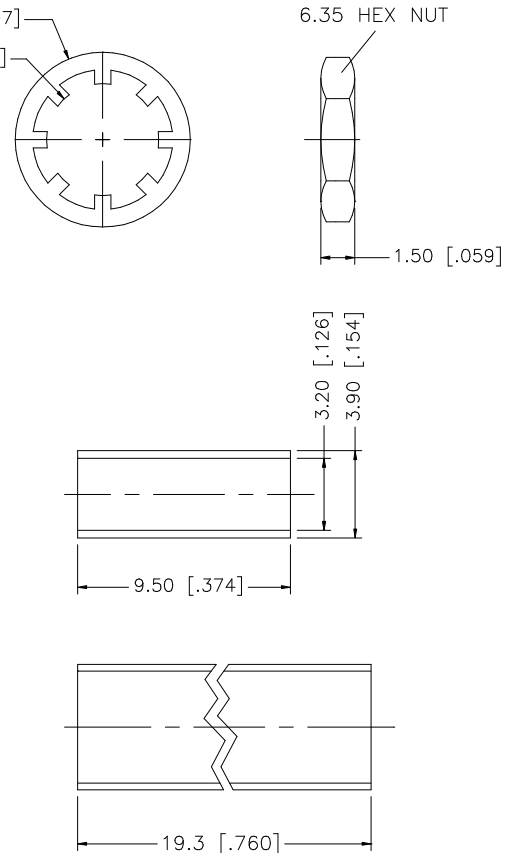
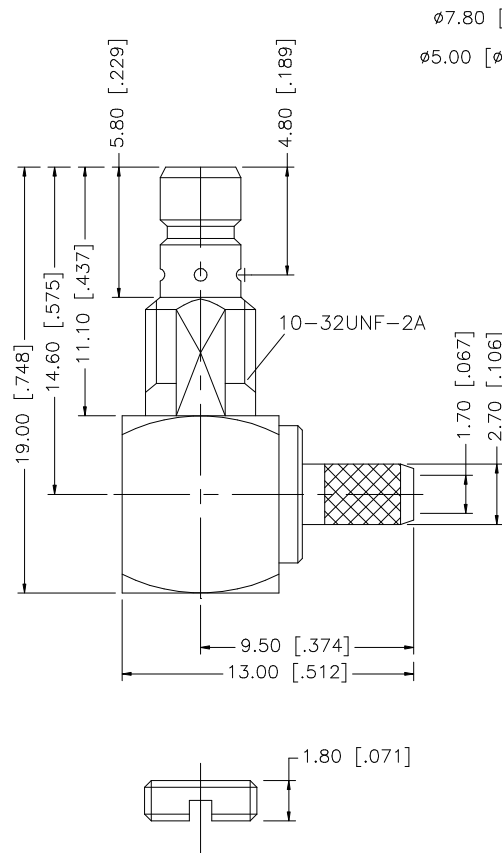
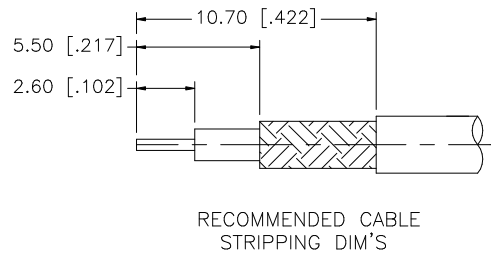


REV.	DATE	DESCRIPTION
NC	04/29/99	INITIAL RELEASE
A	05/08/07	REVISE BARREL, FERRULE DIMS, UPDATE DRAWING FORMAT



NOTE:
 1. CRIMPED FERRULE HEX CRIMP SIZE .128"
 2. CONTACT PIN TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS		DATE		Amphenol Connex					
7	COVER	BRASS	GOLD	1		UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	DRAWN	G.R.S.	05/08/07						
6	FERRULE	COPPER	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”		CHECKED				PART DESCRIPTION SMB R/A BULKHEAD CRIMP JACK (FOR RG-174/U, 188A/U, 316/U)				
5	HEX NUT	BRASS	GOLD	1		ISSUED									
4	LOCK WASHER	BRASS	GOLD	1	DO NOT SCALE DRAWING	SHEET	1 OF 1				PART NO. 142233				
3	CONTACT PIN	BRASS	GOLD	1		CAD FILE	C:/142/142233.DWG								
2	INSULATOR	TEFLON	NATURAL	1		DWG. NO.	142233.DWG			REV.	A	SIZE	A	SCALE	NA
1	BODY	BRASS	GOLD	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											