
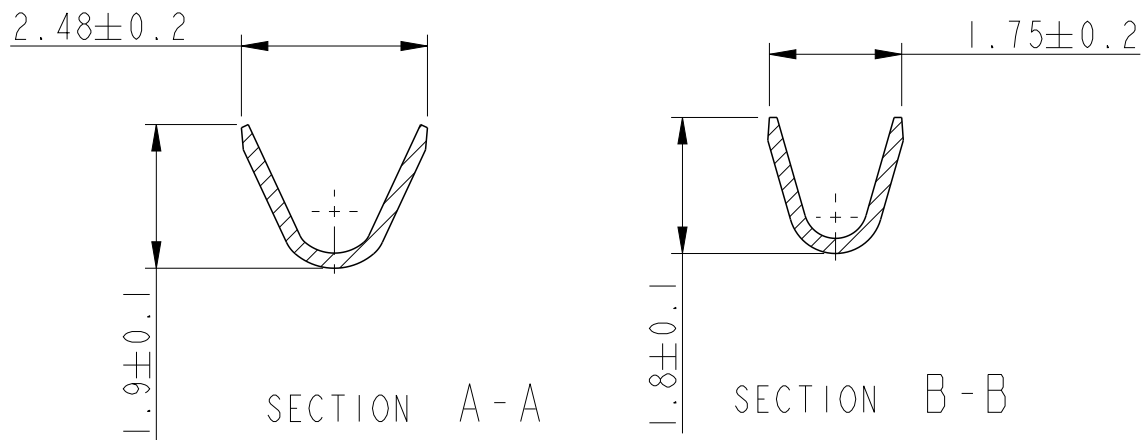


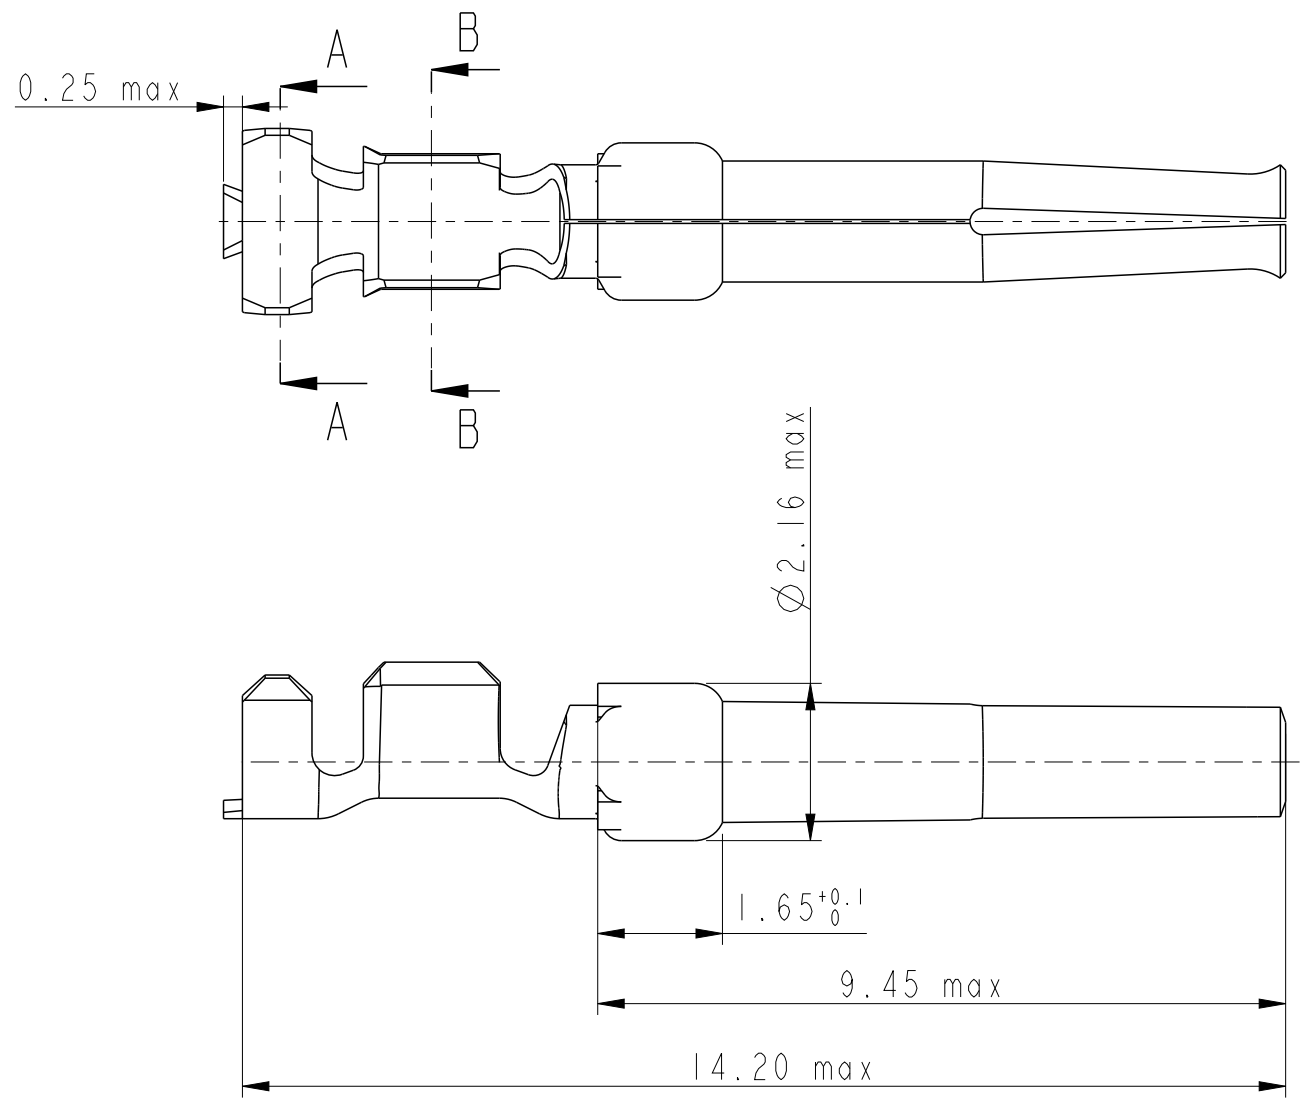


- NOTES:
- 1-Material:phosphor bronze,thickness 0.20
 - 2-Finish on contact area:see table
finish on termination:bright tin over nickel
 - 3-Wire range:20 to 24 AWG
 - 4-Max outer dia of wire insulator:1.73 mm
 - 5-Current carrying capacity per contact:
 - 5.Amps max when crimped to #20 AWG
 - 5 Amps max when crimped to #22 AWG
 - 3 Amps max when crimped to #24 AWG
 - 6-After 5 insertions into connector, contact retention must be 5 pounds axial load min
 - 7-When contact is crimped to 20 AWG,the insulation support crimped height must be 1.78 mm max to ensure a proper insertion into housing
 - 8-Reel should be continous without any contacts missing in between
 - 9-Packaging:Reel of 400 contacts

NOTE : ROHS INFORMATIONS
The LF products meet European union directives and other country regulations as described in GS-22-008
Terminations plating spec : 2um Nickel min + 2um Sn min
Packaging Spec : see GS-14-920

PULL PART	-
86563006064LF	Flash Au
86563006064	Flash Au
PART NUMBER	Plating

rev	ecn no	dr	date
D	LS06-196	MPE	27/11/2006
E	LS08-0127	MPE	2008/05/13
F	109-0152	AMR	2009-07-27
G	110-0070	AMR	2010-03-09
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302		- ✓	tolerance std ISO 406 ISO 1101		projection 	mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	C JARRY	28/01/97	ANGULAR		LINEAR		0.X	±0.3	size A3	Scale 10:1	
Eng							0.XX	±0.1			
Chr			0°	±2°			0.XXX	±0.05	ECN 110-0070		
Appr			Product family					-	Spec ref		
			title CRIMP CONTACTS					dwg no C01-8656-1504		Rev. G	
			catalog no					-	customer		sheet 1 of 1