


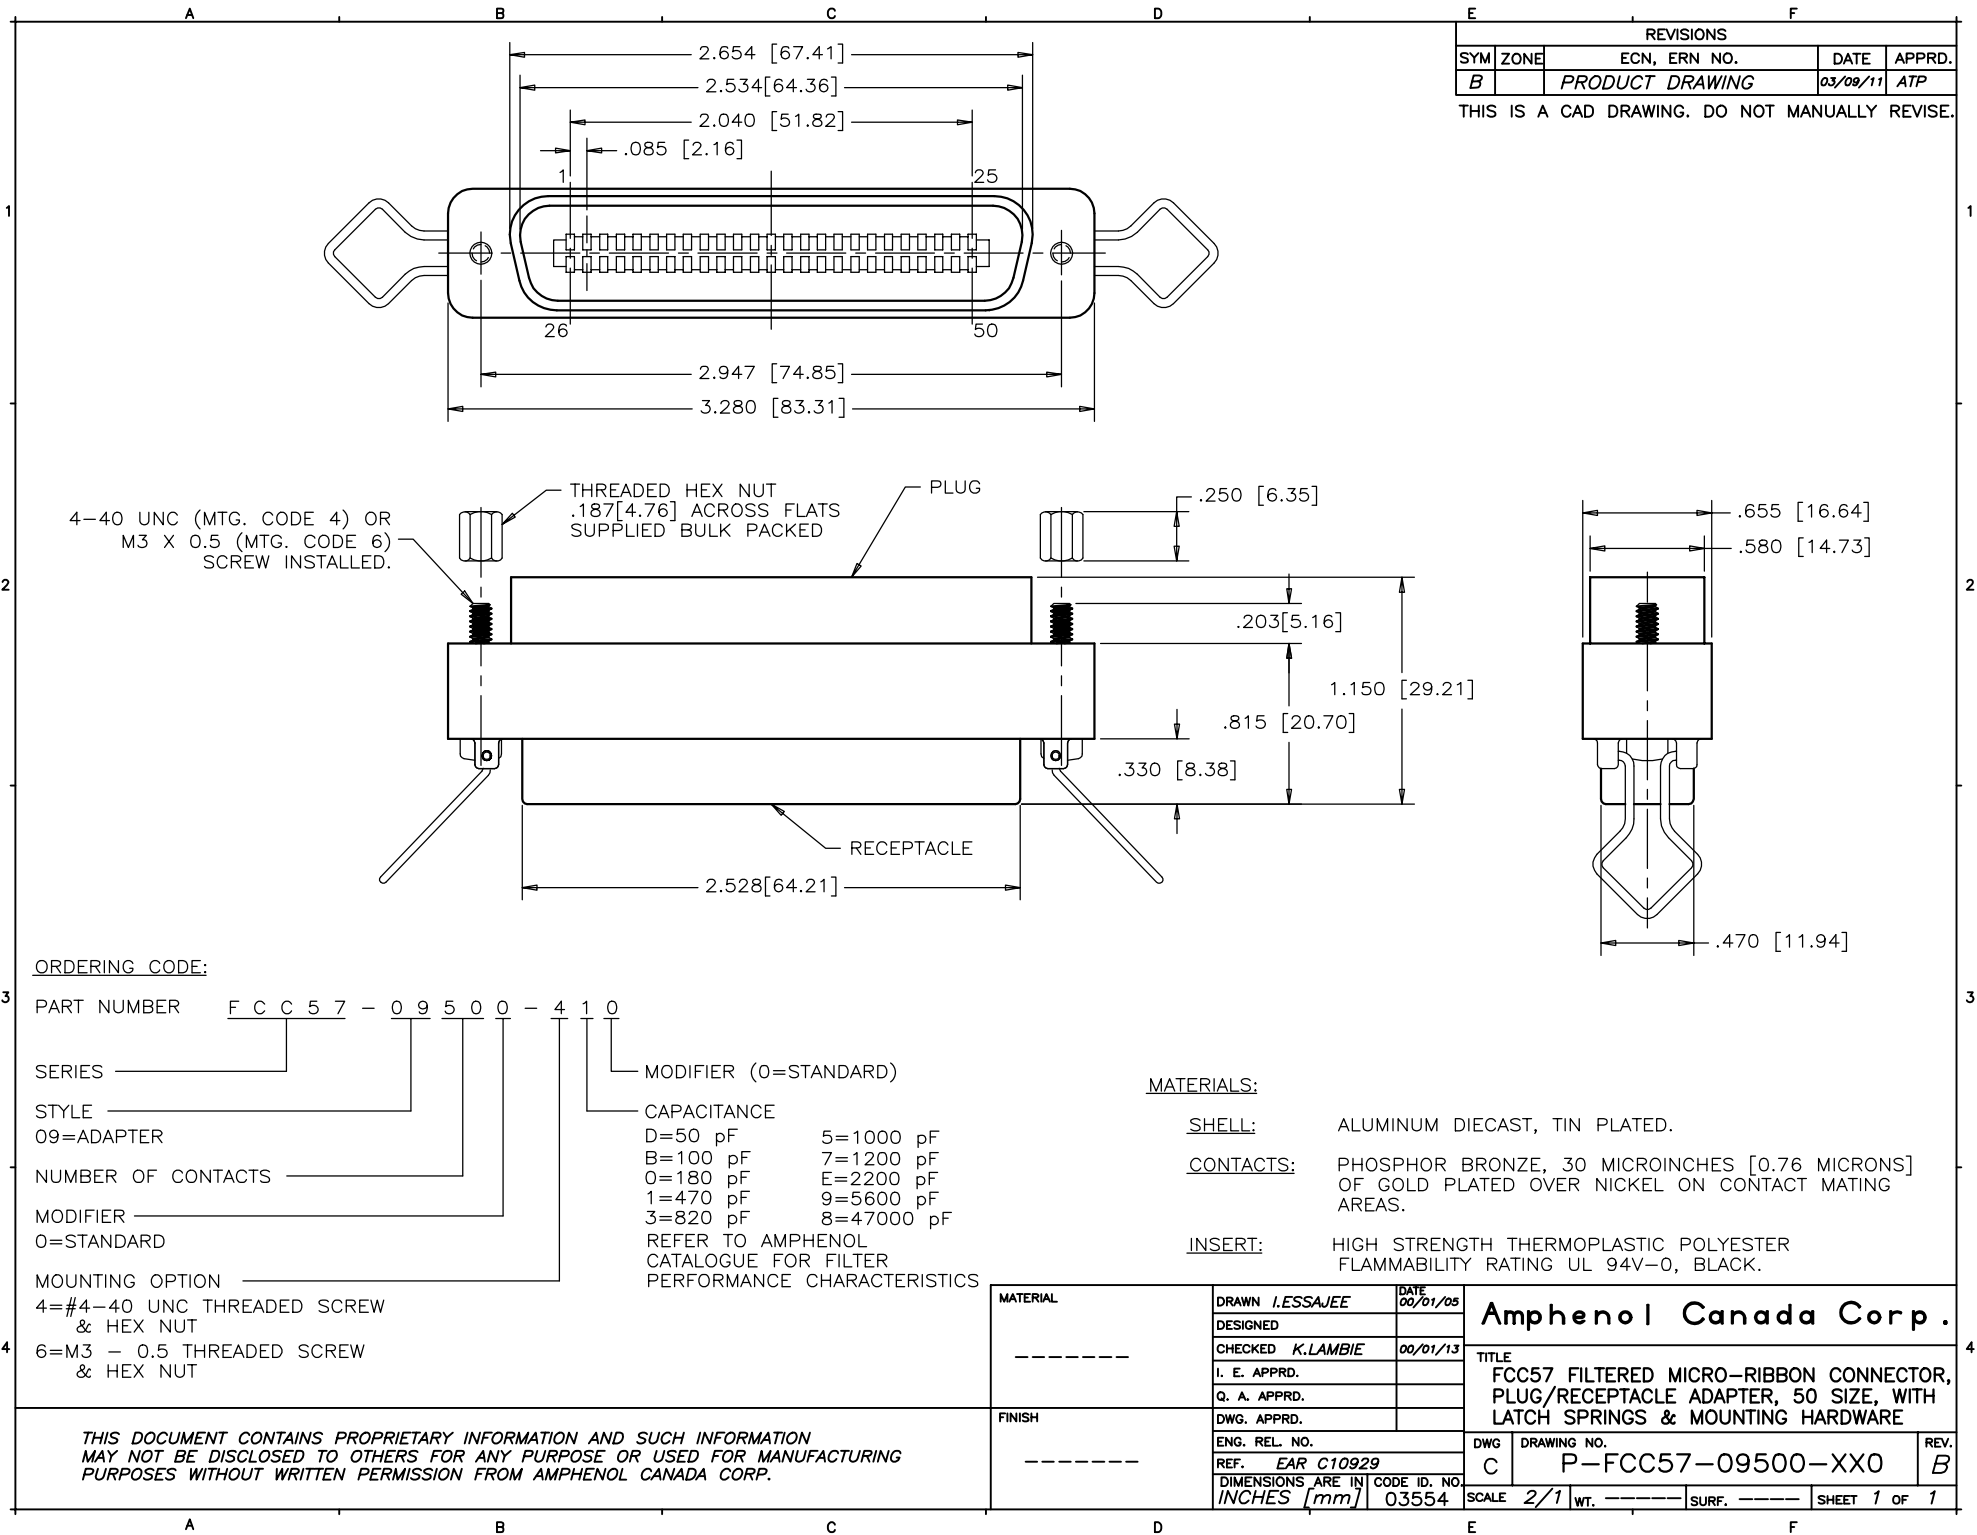

REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
B		PRODUCT DRAWING	03/09/11	ATP

THIS IS A CAD DRAWING. DO NOT MANUALLY REVISE.

ORDERING CODE:

PART NUMBER F C C 5 7 - 0 9 5 0 0 - 4 1 0

SERIES _____ MODIFIER (0=STANDARD)

STYLE _____ CAPACITANCE

09=ADAPTER D=50 pF 5=1000 pF
NUMBER OF CONTACTS _____ B=100 pF 7=1200 pF
0=180 pF E=2200 pF
1=470 pF 9=5600 pF
3=820 pF 8=47000 pF

MODIFIER _____ REFER TO AMPHENOL
0=STANDARD CATALOGUE FOR FILTER
PERFORMANCE CHARACTERISTICS

MOUNTING OPTION _____
4=#4-40 UNC THREADED SCREW
& HEX NUT
6=M3 - 0.5 THREADED SCREW
& HEX NUT

MATERIALS:

SHELL: ALUMINUM DIECAST, TIN PLATED.

CONTACTS: PHOSPHOR BRONZE, 30 MICROINCHES [0.76 MICRONS]
OF GOLD PLATED OVER NICKEL ON CONTACT MATING
AREAS.

INSERT: HIGH STRENGTH THERMOPLASTIC POLYESTER
FLAMMABILITY RATING UL 94V-0, BLACK.

MATERIAL -----	DRAWN I.ESSAJEE	DATE 00/01/05	Amphenol Canada Corp.	
	DESIGNED			
	CHECKED K.LAMBIE	00/01/13		
	I. E. APPRD.			
FINISH -----	Q. A. APPRD.		TITLE FCC57 FILTERED MICRO-RIBBON CONNECTOR, PLUG/RECEPTACLE ADAPTER, 50 SIZE, WITH LATCH SPRINGS & MOUNTING HARDWARE	
	DWG. APPRD.			
	ENG. REL. NO.			
	REF. EAR C10929			
DIMENSIONS ARE IN CODE ID. NO.			DWG C	DRAWING NO. P-FCC57-09500-XX0
INCHES [mm] 03554			SCALE 2/1	WT. -----
			SURF. -----	REV. B
			SHEET 1 OF 1	

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING
PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.