




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	53		FI	REVISED PER ECO-11-005027	14MAR2011	RK	HMR

D


C

B


A

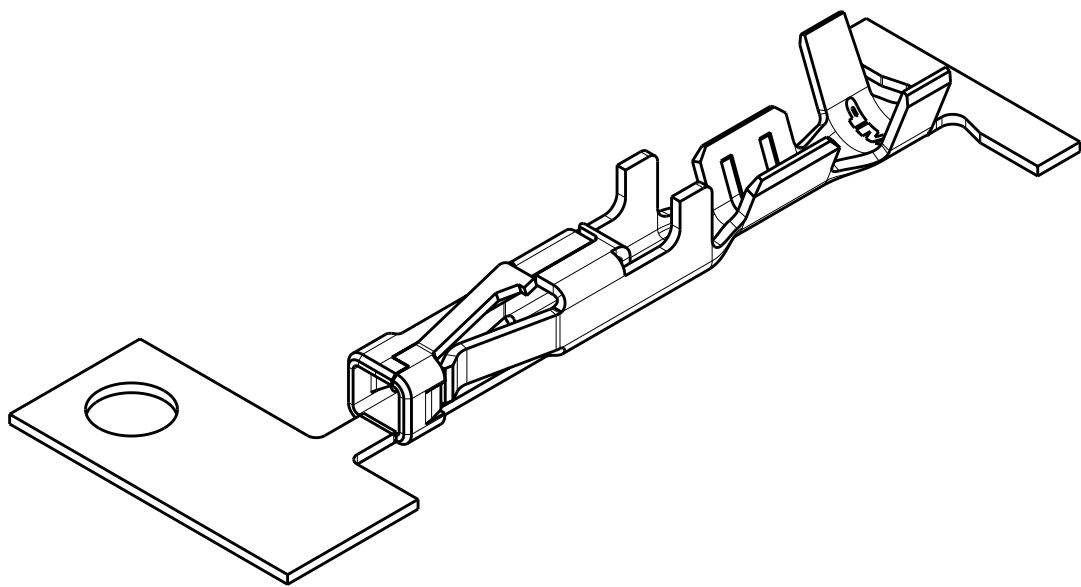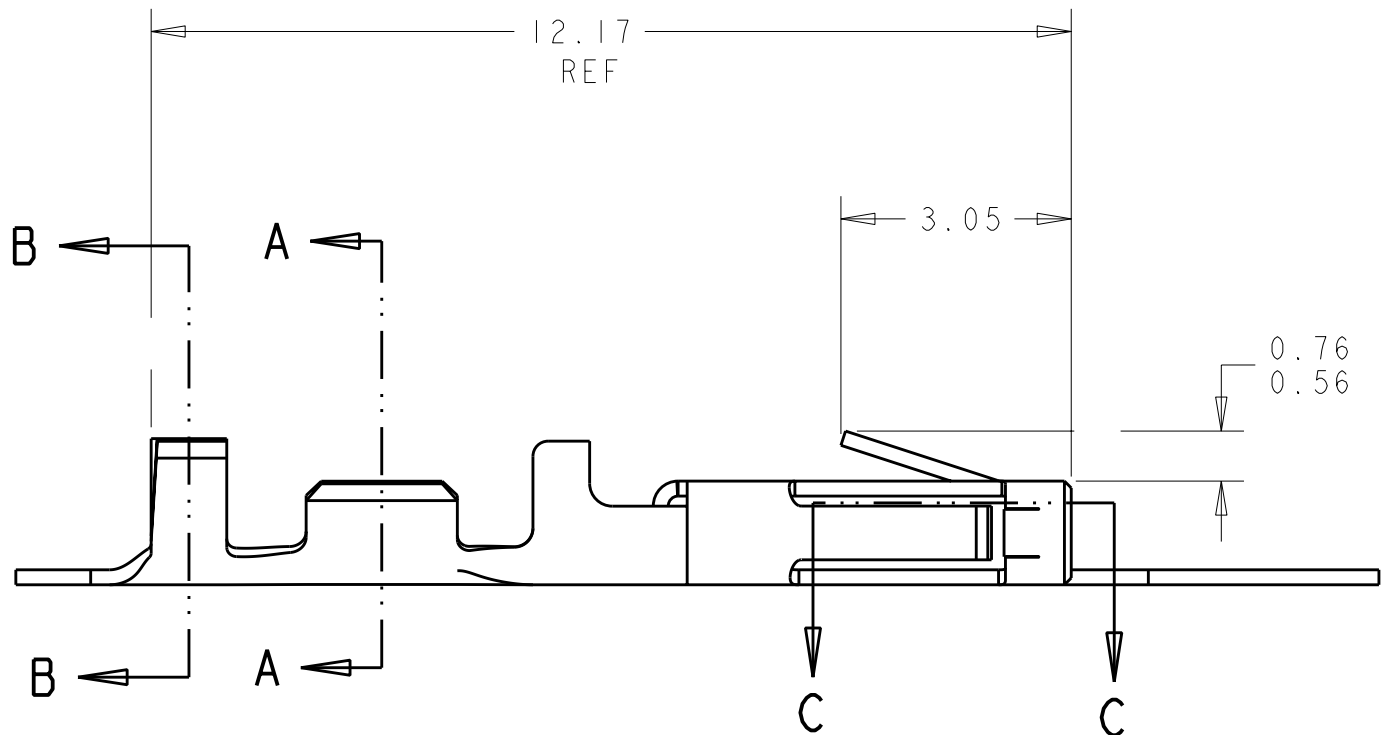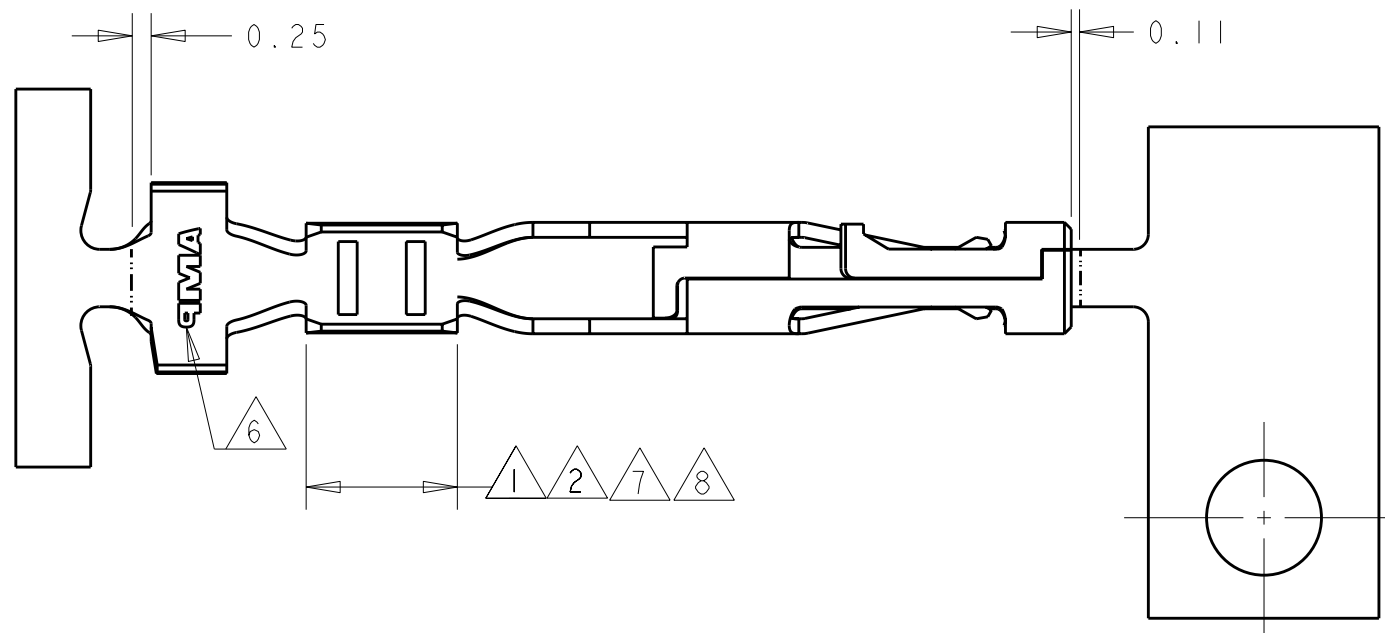


3 DIMENSIONAL MODEL
SCALE 8:1

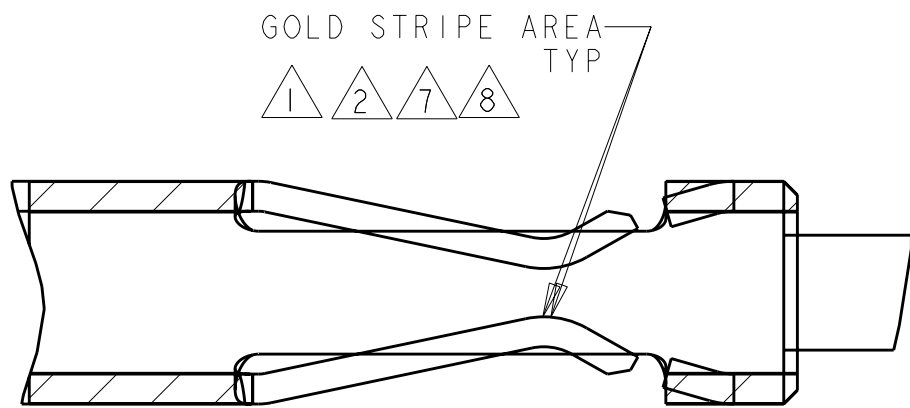

SECTION C-C
SCALE 20:1

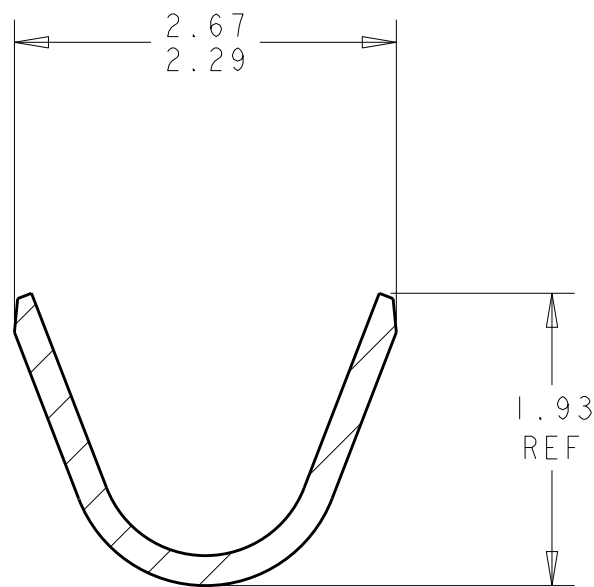

SECTION B-B
SCALE 20:1

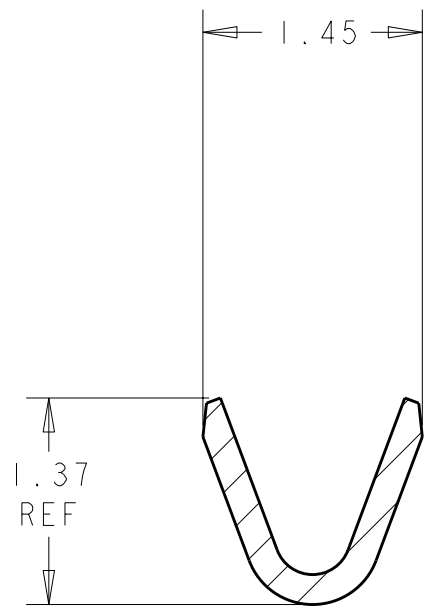

SECTION A-A
SCALE 20:1

- 1 0.000762 THK GOLD STRIPE IN THE GOLD PLATE AREA, BRIGHT TIN IN THE CRIMP AREA, OVER NICKEL PLATE.
- 2 0.000381 THK GOLD STRIPE IN THE GOLD PLATE AREA, BRIGHT TIN IN THE CRIMP AREA, OVER NICKEL PLATE.
- 3 0.0015 - 0.0040 THK BRIGHT TIN.
4. WIRE RANGE: 26 - 30 AWG.
5. INSULATION RANGE 0.89 - 1.524.
- 6 AMP LOGO LOCATED APPROXIMATELY AS SHOWN.
- 7 0.000762 THK GOLD STRIPE IN THE GOLD PLATE AREA, BRIGHT TIN-LEAD IN THE CRIMP AREA, OVER NICKEL PLATE.
- 8 0.000381 THK GOLD STRIPE IN THE GOLD PLATE AREA, BRIGHT TIN-LEAD IN THE CRIMP AREA, OVER NICKEL PLATE.

1	1-794607-2
2	1-794607-1
7	794607-3
8	794607-2
3	794607-1
FINISH	PART NUMBER

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 12-OCT-1999	TE Connectivity			
DIMENSIONS: mm		CHK K. COBLE 12-OCT-1999				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ±0.30° FINISH		APVD K. COBLE 12-OCT-1999	NAME CONTACT, RECEPTACLE, CRIMP SNAP-IN, MICRO MATE-N-LOK(TM)			
MATERIAL 0.2 PH BRZ		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -	SIZE A200779	CAGE CODE C-794607	DRAWING NO -	RESTRICTED TO -
SEE TABLE		CUSTOMER DRAWING	SCALE 10:1	SHEET 1	OF 1	REV FI

D

C

794607

B

A