


LOC	DIST	REVISIONS				
AJ	17	P	LTR	DESCRIPTION	DATE	APVD
			C	REVISED PER EC OS14-0178-05	07JUN05	BM KW

1. CAPTURED CENTER CONTACT
2. DESIGNED FOR USE WITH .085 SEMI-RIGID CABLE

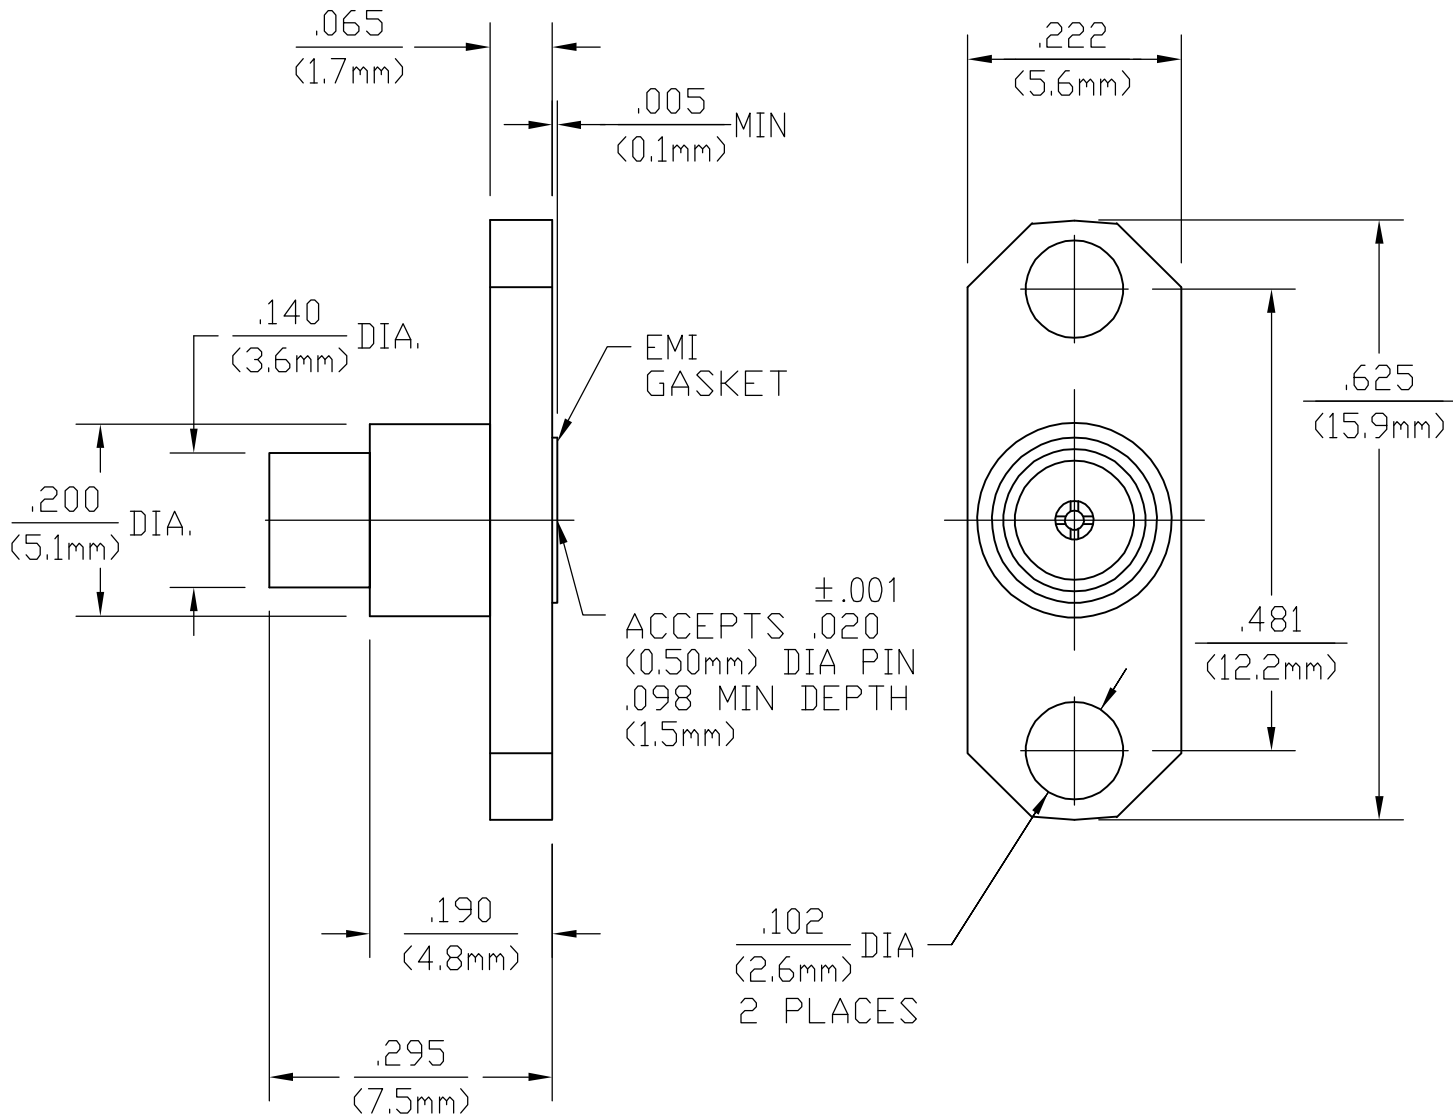

CABLE ENTRY DIAMETERS MINIMUM	
HOUSING	.089
CONTACT	.021

HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290
DIELECTRIC	TFE FLUOROCARBON ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290
GASKET	CONDUCTIVE ELASTOMERS PER MIL-G-83528	N/A
COMPONENT	MATERIAL	FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± .005

4 PLC ± -

ANGLES ± 1°

FINISH

-

DWN G.D.D. 9/21/92

CHK -

APVD G.D.D. 9/21/92

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME

FIELD REPLACEABLE 2 HOLE FLANGE
MOUNT CABLE JACK RECEPTACLE
DIRECT SOLDER ATTACHMENT

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-1063681

-

SCALE 5:1

SHEET 1 OF 1

REV C