

## FFKDSA1/V-2,54-20 BD:+ - 1709846

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, nom. voltage: 160 V, pitch: 2.54 mm, number of positions: 20, connection method: Push-in spring connection, mounting: Wave soldering, color: green

The figure shows a 1-pos. version of the product

### Your advantages

- Time saving push-in connection, tools not required
- Defined contact force ensures that contact remains stable over the long term
- Intuitive use through colour coded actuation lever
- Operation and conductor connection from one direction enable integration into front of device
- Two solder pins reduce the mechanical strain on the soldering spots
- The latching on the side enables various numbers of positions to be combined
- Vertical connection enables multi-row arrangement on the PCB

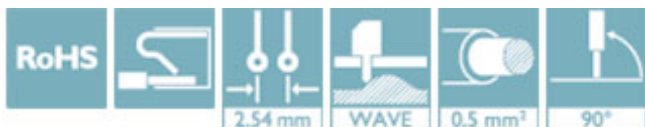

### Key Commercial Data

Packing unit	50 pc
GTIN	
GTIN	4055626120188

### Technical data

#### Dimensions

Length [ l ]	12.6 mm
Pitch	2.54 mm
Dimension a	48.26 mm
Width [ w ]	53.3 mm
Height	13.6 mm
Height [ h ]	17 mm
Solder pin [P]	3.4 mm
Hole diameter	1.1 mm

# FFKDSA1/V-2,54-20 BD:+ - 1709846

## Technical data

### General

Range of articles	FFKDS(A) 0,5/...-V
Nominal cross section	0.5 mm <sup>2</sup>
Number of positions	20

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Approvals

### Approvals

---

#### Approvals


CSA / EAC / cULus Recognized

---


#### Ex Approvals

---

### Approval details

CSA		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	13631
			B
Nominal voltage UN			150 V
Nominal current IN			6 A
mm <sup>2</sup> /AWG/kcmil			20

EAC			B.01742
-----	---	--	---------

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E60425-19870330
			B
Nominal voltage UN			150 V
Nominal current IN			6 A
mm <sup>2</sup> /AWG/kcmil			26-20

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>