


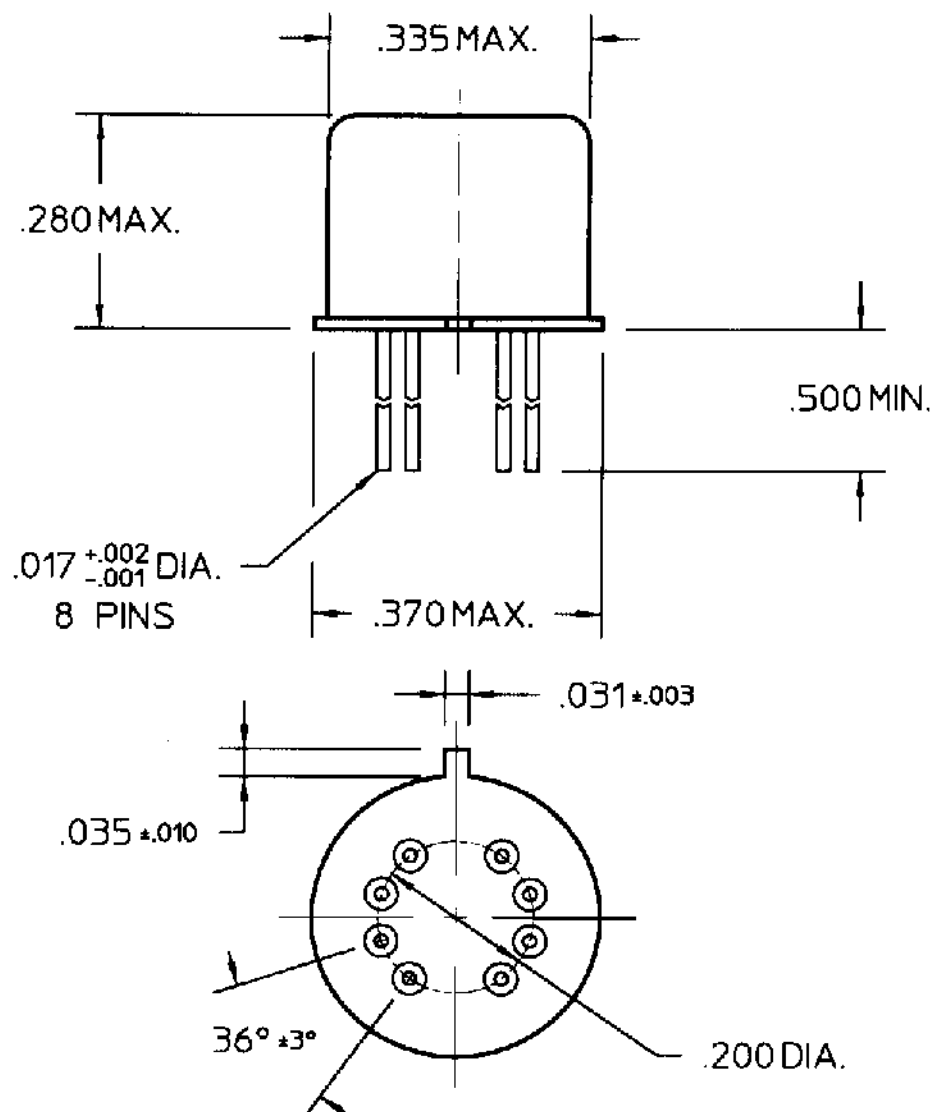

COIL: @ 25°C

RESISTANCE 63 OHMS $\pm$ 10%

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE VOLTAGE 3.0 VDC

TURN-ON BASE CURRENT 0.60 mADC

MUST RELEASE 1.7 VDC MAX, 0.24 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: TURN-ON TIME 2.0 MS MAX

TURN-OFF TIME 7.5 MS MAX

CONTACT STABILIZATION TIME 2.0 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 9/29/98

OK. JERRY 9/29/98



COMMUNICATIONS
INSTRUMENTS, INC.

CUST. QPL

CUST. NO. M28776/5-025M

TYPE J1MAT RELAY

J1MACT-5XM