


**AVAX**  
A KYOCERA GROUP COMPANY

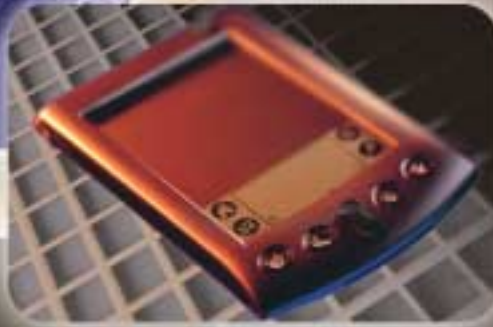

**Kyocera  
Electronic Components**

## RESISTORS

|                               |      |
|-------------------------------|------|
| Thick Film Chip Resistors     | 2-3  |
| Low Resistance Chip Resistors | 4    |
| Chip Resistor Arrays          | 5-7  |
| Chip Resistor Networks        | 8    |
| Test Conditions               | 9-10 |
| Packaging                     | 11   |
| Recommended Land Pattern      | 12   |
| Sample Kit                    | 13   |

## TIMING DEVICES

|                                                    |       |
|----------------------------------------------------|-------|
| Frequency Band Chart                               | 14    |
| MHz Band Ceramic Resonators                        | 15-22 |
| SAW Resonators                                     | 23-25 |
| MHz Band Quartz Crystal                            | 26-27 |
| Clock Oscillators                                  | 28-36 |
| VCO (Voltage Controlled Oscillators)               | 37-41 |
| TCXO (Temperature Compensated Crystal Oscillators) | 42-45 |

## FILTERS & RF MODULE

|                                     |       |
|-------------------------------------|-------|
| KHz Band Ceramic IF Filters         | 46-47 |
| SAW Filters (Surface Acoustic Wave) | 48-54 |
| Antenna Switch Module               | 55-58 |

## EMC COMPONENTS

|             |       |
|-------------|-------|
| EMI Filters | 59-63 |
|-------------|-------|

## ACOUSTIC GENERATORS

|                        |       |
|------------------------|-------|
| Piezo Ceramic Elements | 64-65 |
| Piezo Buzzers          | 66    |

## TRIMMER CAPACITORS

|                    |       |
|--------------------|-------|
| Trimmer Capacitors | 67-73 |
|--------------------|-------|

NOTICE: Specifications are subject to change without notice. Contact your nearest AVX Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all applications.



## **Resistor Product Discontinuation & Update**

We would like to take this opportunity to thank you for your patronage and the many years of support you have given to our resistive products. As you know we are de-emphasizing the product line and would like to inform you of our decision to re-align our product offering.

AVX will expand our focus on our 0408 and smaller resistor array products and discontinue to offer our larger case size resistor chip series along with the 1206 resistor arrays. This will be accomplished in several stages over the next twelve months. Please refer to each product series below and the effective dates we will cease to supply the products.

- **Chip Resistor Series (CR63, CR32, CR21, CR10)**  
Final Ship Date: February 1<sup>st</sup>, 2004
- **Chip Resistor Series (CR05)**  
Final Ship Date: August 1<sup>st</sup>, 2004
- **1206 Resistor Array Series (CRA3A4E, CRB3A4E, CRC3A4E)**  
Final Ship Date: August 1<sup>st</sup>, 2004

We would like to work closely with you during the discontinuation period and minimize any inconveniences that may arise. Should you have any questions or comments, please contact KDP Marketing.


# Thick Film Chip Resistors



## CR, CJ Series




### STRUCTURE AND MATERIAL

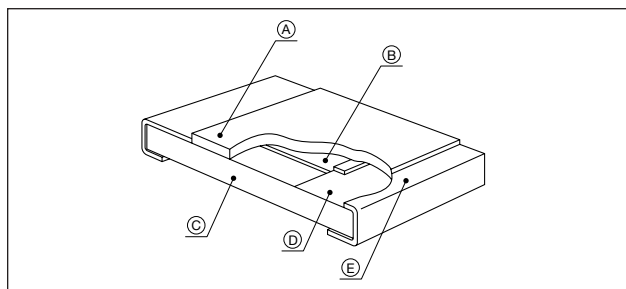

| Code | Structure   | Material                                                                        |
|------|-------------|---------------------------------------------------------------------------------|
| A    | Coating     | Glass or Epoxy                                                                  |
| B    | Resistor    | RuO <sub>2</sub> Resistor<br>(The same material of Termination for chip jumper) |
| C    | Substrate   | 96% Alumina                                                                     |
| D    | Termination | Silver                                                                          |
| E    | Plating     | (Ni, Sn-Pb) Plating                                                             |

### DIMENSIONS

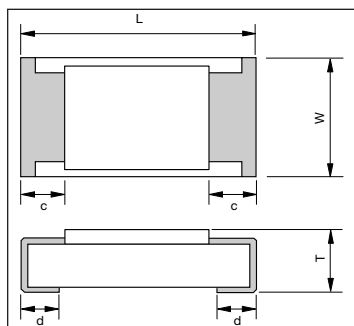

|   | CR03, CJ03<br>(0201)       | CR05, CJ05<br>(0402)       | CR10, CJ10<br>(0603)                                                                   | CR21, CJ21<br>(0805)                                                                   | CR32, CJ32<br>(1206)                                                                   |
|---|----------------------------|----------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| W | 0.30±0.03<br>(0.012±0.001) | 0.50±0.05<br>(0.020±0.002) | 0.80 <sup>+0.15</sup> <sub>-0.10</sub><br>(0.031 <sup>+0.006</sup> <sub>-0.004</sub> ) | 1.25 <sup>+0.15</sup> <sub>-0.10</sub><br>(0.050 <sup>+0.006</sup> <sub>-0.004</sub> ) | 1.55 <sup>+0.15</sup> <sub>-0.10</sub><br>(0.061 <sup>+0.006</sup> <sub>-0.004</sub> ) |
| L | 0.60±0.03<br>(0.024±0.001) | 1.00±0.05<br>(0.039±0.002) | 1.60±0.10<br>(0.063±0.004)                                                             | 2.00±0.10<br>(0.080±0.004)                                                             | 3.10±0.10<br>(0.122±0.004)                                                             |
| C | 0.15±0.10<br>(0.006±0.004) | 0.20±0.15<br>(0.008±0.006) | 0.25±0.20<br>(0.010±0.008)                                                             | 0.35±0.20<br>(0.014±0.008)                                                             | 0.45±0.20<br>(0.018±0.008)                                                             |
| d | 0.15±0.05<br>(0.006±0.002) | 0.20±0.10<br>(0.008±0.004) | 0.20 <sup>+0.20</sup> <sub>-0.15</sub><br>(0.008 <sup>+0.008</sup> <sub>-0.004</sub> ) | 0.40±0.20<br>(0.016±0.008)                                                             | 0.45±0.20<br>(0.018±0.008)                                                             |
| T | 0.23±0.05<br>(0.009±0.002) | 0.35±0.05<br>(0.014±0.002) | 0.50±0.10<br>(0.020±0.004)                                                             | 0.55±0.10<br>(0.022±0.004)                                                             | 0.55 <sup>+0.10</sup> <sub>-0.05</sub><br>(0.022 <sup>+0.004</sup> <sub>-0.002</sub> ) |

### SPECIFICATIONS

| Series                 | CR03 (0201)    | CR05 (0402)                        | CR10 (0603)                                          | CR21 (0805)                                          | CR32 (1206)                                          |
|------------------------|----------------|------------------------------------|------------------------------------------------------|------------------------------------------------------|------------------------------------------------------|
| Rated Power            | 0.050 (1/20) W | 0.0625 (1/16) W                    | 0.10 (1/10) W                                        | 0.125 (1/8) W                                        | 0.25 (1/4) W                                         |
| Max. Working Voltage   | 15V            | 50V                                | 50V                                                  | 100V                                                 | 200V                                                 |
| Resistance Tolerance   | J = ±5%        | F = ±1%<br>J = ±5%                 | D = ±0.5%<br>F = ±1%<br>J = ±5%                      | D = ±0.5%<br>F = ±1%<br>J = ±5%                      | D = ±0.5%<br>F = ±1%<br>J = ±5%                      |
| Resistance Value Range | 10Ω to 1MΩ     | 10Ω to 1MΩ : F<br>1.0Ω to 10MΩ : J | 10Ω to 1MΩ : D<br>10Ω to 1MΩ : F<br>1.0Ω to 10MΩ : J | 10Ω to 1MΩ : D<br>10Ω to 1MΩ : F<br>1.0Ω to 10MΩ : J | 10Ω to 1MΩ : D<br>10Ω to 1MΩ : F<br>1.0Ω to 10MΩ : J |
| Working Temperature    | -55 to +125°C  | -55 to +125°C                      | -55 to +125°C                                        | -55 to +125°C                                        | -55 to +125°C                                        |

### FEATURES

- Low Noise
- Nickel Barrier Terminations

### APPLICATION

- General Purpose

### HOW TO ORDER

CR 05 - 472 J - H

#### Packaging

T = 7" Reel/Punched Paper Tape  
(5,000 pcs/reel) except CR05  
H = 7" Reel/Punched Paper Tape  
(10,000 pcs/reel, 2mm pitch taping)  
CR03 and CR05  
D = 10" Reel/Punched Paper Tape  
(10,000 pcs/reel) CR32, CR21, CR10

#### Resistance Tolerance

D = ±0.5% J = ±5%  
F = ±1% Blank = Chip Jumper

**Resistance Value** (3 digits or 4 digits)  
Example: 2 significant figures and 1 multiplier  
R indicator decimal or values <10Ω  
Chip Jumper = 000

#### Size (EIA)

03 = 0201 21 = 0805  
05 = 0402 32 = 1206  
10 = 0603

#### Series

CR = Resistor  
CJ = Jumper

# Thick Film Chip Resistors



## CR, CJ Series

### SPECIFICATIONS

#### CJ Series

| Part Number         | CJ03          | CJ05, CJ10, CJ21<br>(0402, 0603, 0805 Type) | CJ32<br>(1206 Type) |
|---------------------|---------------|---------------------------------------------|---------------------|
| Rated Current       | 0.5A (70°C)   | 1A (70°C)                                   | 2A (70°C)           |
| Resistivity         | 50mΩ max.     | 50mΩ max.                                   | 50mΩ max.           |
| Working Temperature | -55 to +125°C | -55 to +125°C                               | -55 to +125°C       |

### HOW TO CALCULATE RATED VOLTAGE

$$E = \sqrt{P \cdot R}$$

E = Rated Voltage (V)


P = Rated Power (W)

R = Standard Resistance Value (Ω)

Rated voltage should be lower than max. working voltage.

### RECOMMENDED LAND PATTERN

millimeters (inches)

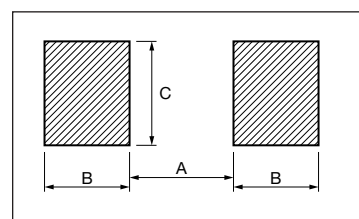

| EIA Size | 0201             | 0402            | 0603            | 0805            | 1206            |
|----------|------------------|-----------------|-----------------|-----------------|-----------------|
| A        | 0.25<br>(0.010)  | 0.50<br>(0.020) | 0.80<br>(0.031) | 1.00<br>(0.039) | 2.00<br>(0.079) |
| B        | 0.225<br>(0.009) | 0.40<br>(0.016) | 0.70<br>(0.028) | 0.80<br>(0.031) | 0.80<br>(0.031) |
| C        | 0.30<br>(0.012)  | 0.50<br>(0.020) | 0.80<br>(0.031) | 1.20<br>(0.047) | 1.50<br>(0.059) |

### MARKING

Marking available as follows:

Series: CR32, CJ32, CR21, CJ21, CR10, CJ10

3 digit indication


Example: 473=47x10<sup>3</sup> = 47000 Ω = 47 kΩ

0 = 0 Ω (Jumper)

100 = 10 Ω

102 = 1 kΩ

105 = 1 MΩ



Series: CR03, CJ03, CR05 and CJ05 - No marking

Note: On CR32 4 digit marking is standard for ±1% and ±0.5% tolerances.

### STANDARD RESISTANCE VALUE

| E24 | 1.0 | 1.1 | 1.2 | 1.3 | 1.5 | 1.6 | 1.8 | 2.0 | 2.2 |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|     | 2.4 | 2.7 | 3.0 | 3.3 | 3.6 | 3.9 | 4.3 | 4.7 | 5.1 |
|     | 5.6 | 6.2 | 6.8 | 7.5 | 8.2 | 9.1 |     |     |     |


#### For ±1% and ±.5% Tolerance

|     |      |      |      |      |      |      |      |      |      |      |
|-----|------|------|------|------|------|------|------|------|------|------|
| E96 | 10.0 | 10.2 | 10.5 | 10.7 | 11.0 | 11.3 | 11.5 | 11.8 | 12.1 | 12.4 |
|     | 12.7 | 13.0 | 13.3 | 13.7 | 14.0 | 14.3 | 14.7 | 15.0 | 15.4 | 15.8 |
|     | 16.2 | 16.5 | 16.9 | 17.4 | 17.8 | 18.2 | 18.7 | 19.1 | 19.6 | 20.0 |
|     | 20.5 | 21.0 | 21.5 | 22.1 | 22.6 | 23.2 | 23.7 | 24.3 | 24.9 | 25.5 |
|     | 26.1 | 26.7 | 27.4 | 28.0 | 28.7 | 29.4 | 30.1 | 30.9 | 31.6 | 32.4 |
|     | 33.2 | 34.0 | 34.8 | 35.7 | 36.5 | 37.4 | 38.3 | 39.2 | 40.2 | 41.2 |
|     | 42.2 | 43.2 | 44.2 | 45.3 | 46.4 | 47.5 | 48.7 | 49.9 | 51.1 | 52.3 |
|     | 53.6 | 54.9 | 56.2 | 57.6 | 59.0 | 60.4 | 61.9 | 63.4 | 64.9 | 66.5 |
|     | 68.1 | 69.8 | 71.5 | 73.2 | 75.0 | 76.8 | 78.7 | 80.6 | 82.5 | 84.5 |
|     | 86.6 | 88.7 | 90.9 | 93.1 | 95.3 | 97.6 |      |      |      |      |

### DERATING CURVE

Rated power should be reduced as below when temperature become higher.

Under high temperature, power derated as follows:

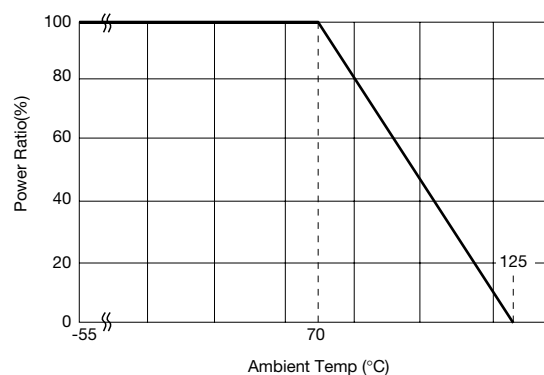


### TEMPERATURE CHARACTERISTICS

| Resistance (Ω)                       | TCR (ppm/°C)                                 |
|--------------------------------------|----------------------------------------------|
| D, F<br>10 ≤ R ≤ 1M                  | -100 to +100                                 |
| J<br>R < 10<br>10 ≤ R ≤ 1M<br>1M < R | -100 to +600<br>-200 to +200<br>-500 to +300 |

# Low Resistance Chip Resistors



## LR Series

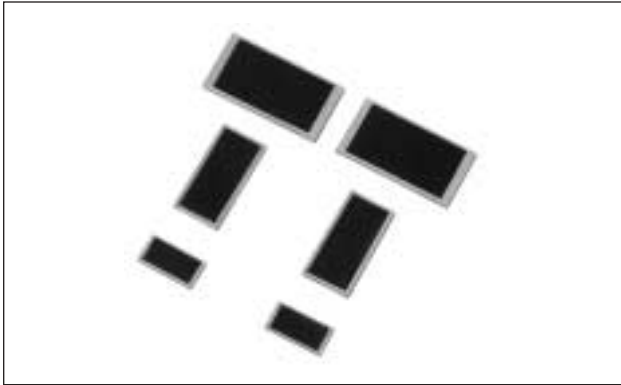

### FEATURES

Suitable for voltage detector circuit of mobile computing device and cellular phone.

### HOW TO ORDER

LR 63 - R100 F - U

#### Packaging

T = Paper Taping (LR32),  
5,000 pcs/7" reel

U = Plastic Taping, (LR50, LR63),  
4,000 pcs/7" reel

#### Resistance Tolerance

K =  $\pm 10\%$

F =  $\pm 1\%$

#### Resistance Value (4 digits)

R020 = 20m $\Omega$

R100 = 100m $\Omega$

R1000 = 1000m $\Omega$

#### Size (EIA)

32 = 1206

50 = 1020

63 = 2512

#### Series

LR

### DIMENSIONS

millimeters (inches)

| LR32, LR63 |                                                                                        | LR50                                   |                                        |  |  |
|------------|----------------------------------------------------------------------------------------|----------------------------------------|----------------------------------------|--|--|
|            |                                                                                        |                                        |                                        |  |  |
|            | LR32 (1206)                                                                            | LR50 (1020)                            | LR63 (2512)                            |  |  |
| W          | 1.55 <sup>+0.15</sup> <sub>-0.10</sub><br>(0.061 <sup>+0.008</sup> <sub>-0.004</sub> ) | 5.00 $\pm$ 0.20<br>(0.197 $\pm$ 0.008) | 3.20 $\pm$ 0.20<br>(0.126 $\pm$ 0.008) |  |  |
| L          | 3.10 $\pm$ 0.10<br>(0.122 $\pm$ 0.004)                                                 | 2.50 $\pm$ 0.20<br>(0.098 $\pm$ 0.008) | 6.30 $\pm$ 0.20<br>(0.248 $\pm$ 0.008) |  |  |
| c          | 0.25 $\pm$ 0.20<br>(0.010 $\pm$ 0.008)                                                 | 0.20 $\pm$ 0.15<br>(0.008 $\pm$ 0.006) | 0.45 $\pm$ 0.20<br>(0.018 $\pm$ 0.008) |  |  |
| d          | 0.45 $\pm$ 0.20<br>(0.018 $\pm$ 0.008)                                                 | 0.50 $\pm$ 0.20<br>(0.020 $\pm$ 0.008) | 0.45 $\pm$ 0.20<br>(0.018 $\pm$ 0.008) |  |  |
| T          | 0.55 <sup>+0.10</sup> <sub>-0.05</sub><br>(0.022 <sup>+0.004</sup> <sub>-0.002</sub> ) | 0.60 $\pm$ 0.10<br>(0.024 $\pm$ 0.004) | 0.60 $\pm$ 0.10<br>(0.024 $\pm$ 0.004) |  |  |


### SPECIFICATIONS

| Series      | Rated Power  | Max. Working Voltage | Resistance Tolerance | Resistance Value                          | Working Temperature | Temperature Characteristics          |
|-------------|--------------|----------------------|----------------------|-------------------------------------------|---------------------|--------------------------------------|
| LR32 (1206) | 0.5W (1/2) W | 707mV                | K = $\pm 10\%$       | 20 to 50m $\Omega$                        | -55 to +125°C       | $\pm 3000$ ppm/°C                    |
|             |              |                      | F = $\pm 1\%$        | 100 to 149m $\Omega$                      |                     | $\pm 150$ ppm/°C                     |
|             |              |                      |                      | 150 to 1000m $\Omega$                     |                     | $\pm 100$ ppm/°C                     |
| LR50 (1020) | 1W           | 316mV                | F = $\pm 1\%$        | 20 to 29m $\Omega$<br>30 to 100m $\Omega$ | -55 to +125°C       | $\pm 150$ ppm/°C<br>$\pm 100$ ppm/°C |
| LR63 (2512) | 1W           | 574mV                | F = $\pm 1\%$        | 100 to 330m $\Omega$                      | -55 to +125°C       | $\pm 100$ ppm/°C                     |





## CIRCUIT DIAGRAM

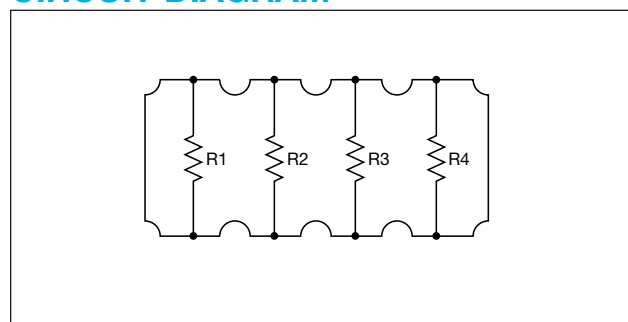

| Chip Resistor Arrays  |                  |
|-----------------------|------------------|
| Item                  | Rating           |
| Rated Power (70°C)*   | 1/16W Element    |
| Max. Working Voltage  | 50V              |
| Max. Overload Voltage | 100V             |
| Resistance Value      | J = 10Ω to 2.2MΩ |
| Tolerance             | J±5%             |
| Working Temperature   | -55 to +125°C    |
| Number of Elements    | 4E = 4 Elements  |

## FEATURES

- ## APPLICATIONS

- ## HOW TO ORDER

**CRA3A 4E 103 J T**

- Packaging**  
T = Paper Taping, 5,000 pcs/reel
- Resistance Tolerance**  
J =  $\pm 5\%$   
Blank = Chip Jumper Arrays
- Resistance Value** (3 digits)  
Chip Jumper Arrays = 000
- Number of Elements**  
4E = 4 Elements
- Series**

| Chip Jumper Arrays          |                            |
|-----------------------------|----------------------------|
| Item                        | Rating                     |
| Rated Current               | 1A                         |
| Conductive Resistance Value | 50MΩ max.                  |
| Resistance Value            | Zero ohms<br>(0 ± .5 ohms) |
| Working Temperature         | -55 to +125°C              |

## mm (inches)

|       | 4 Elements<br>CRA3A4E Series |
|-------|------------------------------|
| Style |                              |
| W     | 1.60±0.15 (0.063±0.006)      |
| L     | 3.20±0.15 (0.126±0.006)      |
| c     | 0.30±0.20 (0.012±0.008)      |
| d     | 0.20±0.15 (0.008±0.006)      |
| t     | 0.50±0.10 (0.020±0.004)      |
| p     | 0.80 typ (0.031)             |

**KYOCERA**







# Chip Resistor Arrays



## CRC Series (Convex Square Corner Type)

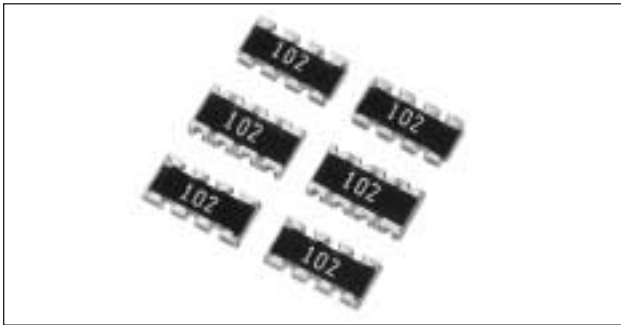

Chip Resistor Arrays have several resistor elements integrated as a single component.

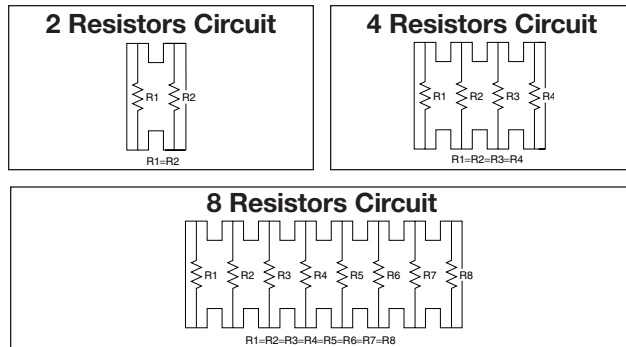





### RATING

| Chip Resistor Arrays  |                                     |
|-----------------------|-------------------------------------|
| Item                  | Rating                              |
| Rated Power (70°C)*   | 1/16W Element                       |
| Max. Working Voltage  | 50V (25V CRC4A)                     |
| Max. Overload Voltage | 100V (50V CRC4A)                    |
| Resistance Value      | J = 10Ω to 2.2MΩ (CRC4A8E 1MΩ max.) |
| Tolerance             | J±5%                                |
| Working Temperature   | -55 to +125°C                       |

\*Rated voltage = 50V or  $\sqrt{\text{Rated power} \times \text{Resistance value}}$ , whichever is less

### DIMENSIONS

millimeters (inches)

| CRC11A  |  | <table><tr><th>Code</th><th>W</th><th>L</th><th>c</th><th>d</th><th>t</th><th>P</th></tr><tr><td>Dim.</td><td>1.00±0.10<br/>(0.040±0.004)</td><td>1.00±0.10<br/>(0.040±0.004)</td><td>0.20±0.15<br/>(0.008±0.006)</td><td>0.20±0.15<br/>(0.008±0.006)</td><td>0.35±0.06<br/>(0.014±0.002)</td><td>0.65 typ<br/>(0.026 typ)</td></tr></table> <p>No Marking on chips</p>                                                                                               | Code                       | W                          | L                          | c                          | d                          | t                          | P | Dim. | 1.00±0.10<br>(0.040±0.004) | 1.00±0.10<br>(0.040±0.004) | 0.20±0.15<br>(0.008±0.006) | 0.20±0.15<br>(0.008±0.006) | 0.35±0.06<br>(0.014±0.002) | 0.65 typ<br>(0.026 typ)    |                            |                            |                            |                            |
|---------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|---|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Code    | W                                                                                   | L                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | c                          | d                          | t                          | P                          |                            |                            |   |      |                            |                            |                            |                            |                            |                            |                            |                            |                            |                            |
| Dim.    | 1.00±0.10<br>(0.040±0.004)                                                          | 1.00±0.10<br>(0.040±0.004)                                                                                                                                                                                                                                                                                                                                                                                                                                            | 0.20±0.15<br>(0.008±0.006) | 0.20±0.15<br>(0.008±0.006) | 0.35±0.06<br>(0.014±0.002) | 0.65 typ<br>(0.026 typ)    |                            |                            |   |      |                            |                            |                            |                            |                            |                            |                            |                            |                            |                            |
| CRC2A4E |  | <table><tr><th>Code</th><th>L</th><th>W</th><th>T</th><th>P</th><th>c</th><th>d</th><th>e1</th><th>e2</th></tr><tr><td>Dim.</td><td>2.00±0.10<br/>(0.079±0.004)</td><td>1.00±0.10<br/>(0.039±0.004)</td><td>0.40±0.10<br/>(0.016±0.004)</td><td>0.50 typ<br/>(0.020 typ)</td><td>0.15±0.15<br/>(0.006±0.006)</td><td>0.25±0.15<br/>(0.010±0.006)</td><td>0.30±0.10<br/>(0.012±0.004)</td><td>0.40±0.10<br/>(0.016±0.004)</td></tr></table> <p>No Marking on chips</p> | Code                       | L                          | W                          | T                          | P                          | c                          | d | e1   | e2                         | Dim.                       | 2.00±0.10<br>(0.079±0.004) | 1.00±0.10<br>(0.039±0.004) | 0.40±0.10<br>(0.016±0.004) | 0.50 typ<br>(0.020 typ)    | 0.15±0.15<br>(0.006±0.006) | 0.25±0.15<br>(0.010±0.006) | 0.30±0.10<br>(0.012±0.004) | 0.40±0.10<br>(0.016±0.004) |
| Code    | L                                                                                   | W                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | T                          | P                          | c                          | d                          | e1                         | e2                         |   |      |                            |                            |                            |                            |                            |                            |                            |                            |                            |                            |
| Dim.    | 2.00±0.10<br>(0.079±0.004)                                                          | 1.00±0.10<br>(0.039±0.004)                                                                                                                                                                                                                                                                                                                                                                                                                                            | 0.40±0.10<br>(0.016±0.004) | 0.50 typ<br>(0.020 typ)    | 0.15±0.15<br>(0.006±0.006) | 0.25±0.15<br>(0.010±0.006) | 0.30±0.10<br>(0.012±0.004) | 0.40±0.10<br>(0.016±0.004) |   |      |                            |                            |                            |                            |                            |                            |                            |                            |                            |                            |
| CRC3A4E |  | <table><tr><th>Code</th><th>W</th><th>L</th><th>c</th><th>d</th><th>T</th><th>P</th></tr><tr><td>Dim.</td><td>1.60±0.15<br/>(0.063±0.006)</td><td>3.20±0.15<br/>(0.126±0.006)</td><td>0.30±0.20<br/>(0.012±0.008)</td><td>0.20±0.15<br/>(0.008±0.006)</td><td>0.50±0.10<br/>(0.020±0.004)</td><td>0.80 typ<br/>(0.031 typ)</td></tr></table> <p>No Marking on chips</p>                                                                                               | Code                       | W                          | L                          | c                          | d                          | T                          | P | Dim. | 1.60±0.15<br>(0.063±0.006) | 3.20±0.15<br>(0.126±0.006) | 0.30±0.20<br>(0.012±0.008) | 0.20±0.15<br>(0.008±0.006) | 0.50±0.10<br>(0.020±0.004) | 0.80 typ<br>(0.031 typ)    |                            |                            |                            |                            |
| Code    | W                                                                                   | L                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | c                          | d                          | T                          | P                          |                            |                            |   |      |                            |                            |                            |                            |                            |                            |                            |                            |                            |                            |
| Dim.    | 1.60±0.15<br>(0.063±0.006)                                                          | 3.20±0.15<br>(0.126±0.006)                                                                                                                                                                                                                                                                                                                                                                                                                                            | 0.30±0.20<br>(0.012±0.008) | 0.20±0.15<br>(0.008±0.006) | 0.50±0.10<br>(0.020±0.004) | 0.80 typ<br>(0.031 typ)    |                            |                            |   |      |                            |                            |                            |                            |                            |                            |                            |                            |                            |                            |
| CRC4A8E |  | <table><tr><th>Code</th><th>L</th><th>W</th><th>T</th><th>P</th><th>c</th><th>d</th><th>e</th></tr><tr><td>Dim.</td><td>3.80±0.10<br/>(0.150±0.004)</td><td>1.60±0.10<br/>(0.063±0.004)</td><td>0.45±0.10<br/>(0.018±0.004)</td><td>0.50 typ<br/>(0.020 typ)</td><td>0.30±0.20<br/>(0.012±0.008)</td><td>0.30±0.15<br/>(0.012±0.006)</td><td>0.30±0.10<br/>(0.012±0.004)</td></tr></table> <p>No Marking on chips</p>                                                 | Code                       | L                          | W                          | T                          | P                          | c                          | d | e    | Dim.                       | 3.80±0.10<br>(0.150±0.004) | 1.60±0.10<br>(0.063±0.004) | 0.45±0.10<br>(0.018±0.004) | 0.50 typ<br>(0.020 typ)    | 0.30±0.20<br>(0.012±0.008) | 0.30±0.15<br>(0.012±0.006) | 0.30±0.10<br>(0.012±0.004) |                            |                            |
| Code    | L                                                                                   | W                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | T                          | P                          | c                          | d                          | e                          |                            |   |      |                            |                            |                            |                            |                            |                            |                            |                            |                            |                            |
| Dim.    | 3.80±0.10<br>(0.150±0.004)                                                          | 1.60±0.10<br>(0.063±0.004)                                                                                                                                                                                                                                                                                                                                                                                                                                            | 0.45±0.10<br>(0.018±0.004) | 0.50 typ<br>(0.020 typ)    | 0.30±0.20<br>(0.012±0.008) | 0.30±0.15<br>(0.012±0.006) | 0.30±0.10<br>(0.012±0.004) |                            |   |      |                            |                            |                            |                            |                            |                            |                            |                            |                            |                            |


### FEATURES

- Reduction in mounting process & costs
- Save PCB space
- Reduction of inventory control costs

### APPLICATIONS

- Computer
- Hard Disk Drive
- Printer
- CD-ROM

### HOW TO ORDER

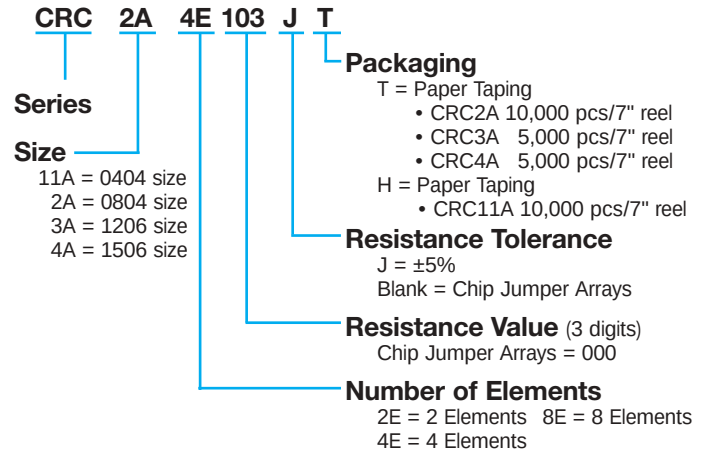

# Chip Resistor Networks



## RNA4A Series




### FEATURES

- Reduction in mounting costs & process
- Save PCB space
- Eight resistors in one SMD package
- Reduction of inventory control costs

### APPLICATIONS


- Lap Top Computer
- Printer
- CD-ROM
- Notebook Computer
- Hard Disk Drive
- Facsimile

### CIRCUIT DIAGRAM

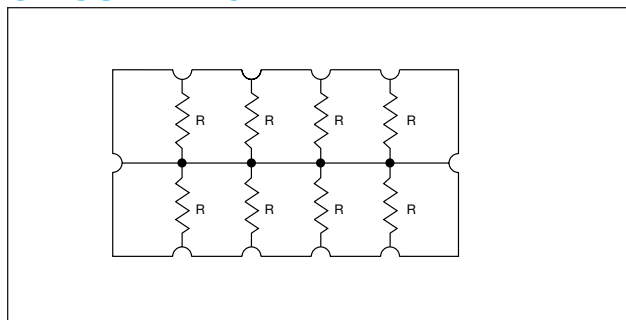


\*Nominal resistance value is all the same.

### HOW TO ORDER

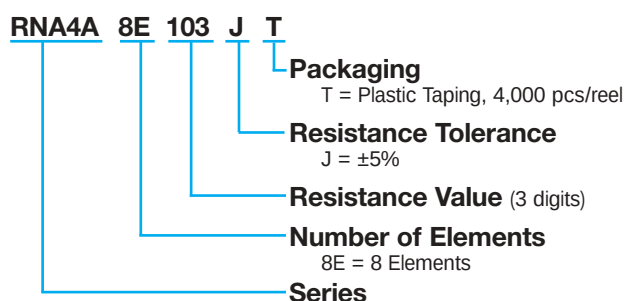

### SHAPE AND DIMENSIONS

millimeters (inches)

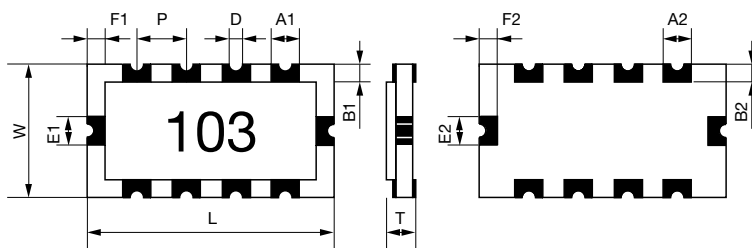

| Code | L                          | W                          | T                          | A1                         | B1                         | E1                         | F1                         | D                       | P                       | A2                         | B2                         | E2                         | F2                         |
|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|-------------------------|-------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Dim. | 4.00±0.15<br>(0.157±0.006) | 2.10±0.15<br>(0.083±0.006) | 0.60±0.10<br>(0.024±0.004) | 0.50±0.10<br>(0.020±0.004) | 0.25±0.15<br>(0.010±0.006) | 0.50±0.10<br>(0.020±0.004) | 0.30±0.15<br>(0.012±0.006) | 0.30 typ<br>(0.012 typ) | 0.80 typ<br>(0.031 typ) | 0.40±0.10<br>(0.016±0.004) | 0.40±0.15<br>(0.016±0.006) | 0.50±0.10<br>(0.020±0.004) | 0.35±0.15<br>(0.014±0.006) |

### SPECIFICATIONS

| Item                   | Rating                  |
|------------------------|-------------------------|
| Rated Power (70°C)     | 1/16W (0.0625W) Element |
| Max. Working Voltage*  | 25V                     |
| Max. Overload Voltage  | 50V                     |
| Resistance Tolerance   | J = $\pm 5\%$           |
| Resistance Value Range | 100Ω to 220KΩ           |
| Number of Elements     | 8E = 8 Elements         |
| Working Temperature    | -55 to +125°C           |

\*Rated voltage =  $\sqrt{\text{Rated power} \times \text{Resistance value}}$ , whichever is less

\*If resistance value under 100Ω is needed, please contact sales.

### STANDARD RESISTANCE VALUE


| E6 | 10 | 15 | 22 |
|----|----|----|----|
|    | 33 | 47 | 68 |

# Chip Resistor Arrays



## CR, CJ, CRA, CRB, CRC Series - Test Conditions

### ELECTRICAL CHARACTERISTICS

| Item                                       |                                              | Standard                                                                                                                                                                                                                                                          |                | Test Conditions                                                                                                                                                                                                                                                                                                              |                                                                                                                                                   |              |                                            |                                              |  |                                                                                                                                                                                                                                                                                                                                               |  |
|--------------------------------------------|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------------------------------------|----------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|                                            |                                              | Resistor                                                                                                                                                                                                                                                          | Jumper         | Resistor                                                                                                                                                                                                                                                                                                                     | Jumper                                                                                                                                            |              |                                            |                                              |  |                                                                                                                                                                                                                                                                                                                                               |  |
| DC Resistance                              |                                              | Within Initial Tolerance                                                                                                                                                                                                                                          |                | Power Condition A<br>(20°C, 65% RH)                                                                                                                                                                                                                                                                                          |                                                                                                                                                   |              |                                            |                                              |  |                                                                                                                                                                                                                                                                                                                                               |  |
| Temperature Characteristics                |                                              | <table><tr><th>Resistance (Ω)</th><th>TCR (ppm/°C)</th></tr><tr><td>*D, F<br/>10≤ R ≤1M</td><td>-100 to +100</td></tr><tr><td>J, CR05 = F<br/>R &lt;10<br/>10≤ R ≤1M<br/>1M&lt; R</td><td>-100 to +600<br/>-250 to +250<br/>-500 to +300</td></tr></table>        | Resistance (Ω) | TCR (ppm/°C)                                                                                                                                                                                                                                                                                                                 | *D, F<br>10≤ R ≤1M                                                                                                                                | -100 to +100 | J, CR05 = F<br>R <10<br>10≤ R ≤1M<br>1M< R | -100 to +600<br>-250 to +250<br>-500 to +300 |  | <div>Test Temperature: 25, 125(°C)<br/>ΔR/R=R<sub>2</sub>–R<sub>1</sub>/R<sub>1</sub>x1/T<sub>2</sub>–T<sub>1</sub>x10<sup>6</sup><br/>ΔR/R = Temp. Coefficient (ppm/°C)<br/>T<sub>1</sub> = 25(°C)<br/>T<sub>2</sub> = 125(°C)<br/>R<sub>1</sub> = T<sub>1</sub> Resistance at (Ω)<br/>R<sub>2</sub> = T<sub>2</sub> Resistance at (Ω)</div> |  |
| Resistance (Ω)                             | TCR (ppm/°C)                                 |                                                                                                                                                                                                                                                                   |                |                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                   |              |                                            |                                              |  |                                                                                                                                                                                                                                                                                                                                               |  |
| *D, F<br>10≤ R ≤1M                         | -100 to +100                                 |                                                                                                                                                                                                                                                                   |                |                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                   |              |                                            |                                              |  |                                                                                                                                                                                                                                                                                                                                               |  |
| J, CR05 = F<br>R <10<br>10≤ R ≤1M<br>1M< R | -100 to +600<br>-250 to +250<br>-500 to +300 |                                                                                                                                                                                                                                                                   |                |                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                   |              |                                            |                                              |  |                                                                                                                                                                                                                                                                                                                                               |  |
| Short-time Overload                        | ΔR/R                                         | ±(2.0%+0.10Ω) max. of the initial value                                                                                                                                                                                                                           | 50mΩ max.      | (1) Apply 2.0 x rated voltage for 5 sec. (2.5 x rated voltage for Arrays)<br>(2) Wait 30 minutes<br>(3) Measure resistance<br>CR03 = 30V max.<br>CR05 = 50V max.<br>CR10 = 100V max.<br>CR21 = 200V max.<br>CR32 = 400V max.<br>CRA3A, CRB3A, CRC3A = 100V max.                                                              | (1) 2A for 5 sec. (CJ03 = 1A)<br>(2) Wait 30 minutes<br>(3) Measure resistance                                                                    |              |                                            |                                              |  |                                                                                                                                                                                                                                                                                                                                               |  |
|                                            | Visual                                       | No evidence of mechanical damage intermittent overload                                                                                                                                                                                                            |                |                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                   |              |                                            |                                              |  |                                                                                                                                                                                                                                                                                                                                               |  |
| Intermittent Overload                      | ΔR/R                                         | ±(5%+0.1Ω) max. of the initial value                                                                                                                                                                                                                              | 50mΩ max.      | (1) Perform 10,000 voltage cycles as follows:<br>ON (2.0 x rated voltage, 2.5 x for Arrays) 1 sec.<br>OFF 25 sec.<br>(2) Stabilization time 30 min. without loading<br>(3) Measure resistance<br>CR03 = 30V max.<br>CR05 = 50V max.<br>CR10 = 150V max.<br>CR21 = 200V max.<br>CR32 = 400V max.<br>CRA, CRB, CRC = 100V max. | (1) Perform 10,000 current cycles as follows:<br>ON (2A) 1 sec.<br>OFF 25 sec.<br>(2) Wait 30 minutes<br>(3) Measure resistance<br>CJ03 = 1A max. |              |                                            |                                              |  |                                                                                                                                                                                                                                                                                                                                               |  |
|                                            | Visual                                       | No evidence of mechanical damage                                                                                                                                                                                                                                  |                |                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                   |              |                                            |                                              |  |                                                                                                                                                                                                                                                                                                                                               |  |
| Dielectric Withstanding Voltage            |                                              | No evidence of mechanical damage                                                                                                                                                                                                                                  |                | Apply 500 VAC for 1 min. (CR10 300 VAC)<br>(CR05, CRA3A, CRB3A, CRC3A 300 VAC/1 sec.<br>CR03 50 VAC/min.)                                                                                                                                                                                                                    |                                                                                                                                                   |              |                                            |                                              |  |                                                                                                                                                                                                                                                                                                                                               |  |
| Insulation Resistance                      |                                              | <div>• CR03, CJ03 = 10<sup>8</sup>Ω min.<br/>• CR05, CJ05 = 10<sup>8</sup>Ω min.<br/>• CR10, CJ10 = 10<sup>9</sup>Ω min.<br/>• CR21, CJ21 = 10<sup>10</sup>Ω min.<br/>• CR32, CJ32 = 10<sup>12</sup>Ω min.<br/>• CRA3A, CRB3A, CRC3A = 10<sup>9</sup>Ω min.</div> |                | <div>Apply 500V DC<br/>(CR05, CRA3A, CRB3A, CRC3A 100V DC<br/>CR03 50 VDC)</div> <div></div>                                                                                                                                            |                                                                                                                                                   |              |                                            |                                              |  |                                                                                                                                                                                                                                                                                                                                               |  |

# Chip Resistor Arrays



## CR, CJ, CRA, CRB, CRC Series - Test Conditions

### MECHANICAL CHARACTERISTICS

| Item                      |              | Standard                                          |                   | Test Conditions                                                                                                                                                                        |        |
|---------------------------|--------------|---------------------------------------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
|                           |              | Resistor                                          | Jumper            | Resistor                                                                                                                                                                               | Jumper |
| Terminal Strength         | $\Delta R/R$ | $\pm(1\%+0.05\Omega)$ max. of the initial value   | 50m $\Omega$ max. | <p>Apply the load as shown:<br/>Measure resistance during load application</p> <p>Bending in 10 seconds</p> <p>millimeters (inches)</p> <p>PC Board = Glass epoxy t = 1.60 (0.063)</p> |        |
|                           | Visual       | No evidence of mechanical damage after loading    |                   |                                                                                                                                                                                        |        |
| Soldering Heat Resistance | $\Delta R/R$ | $\pm(1\%+0.05\Omega)$ max. of the initial value   | 50m $\Omega$ max. | <p>Immerse into molten solder at 260<math>\pm</math>5°C for 10<math>\pm</math>1 sec.<br/>Stabilize component at room temperature for 1 hr.<br/>Measure resistance.</p>                 |        |
|                           | Visual       | No evidence of leaching                           |                   |                                                                                                                                                                                        |        |
| Solderability             |              | Coverage $\geq$ 95% each termination end          |                   | Immerse in Rogin Flux for 2 $\pm$ 0.5 sec. and in SN62 solder at 235 $\pm$ 5°C for 2 $\pm$ 0.5 sec.                                                                                    |        |
| Anti-Vibration Test       | $\Delta R/R$ | $\pm(1\%+0.1\Omega)$ max. of the initial value    | 50m $\Omega$ max. | <p>2 hrs. each in X, Y and Z axis. (TTL 6 hrs.) 10 to 55 Hz sweep in 1 min. at 1.5mm amplitude.</p>                                                                                    |        |
|                           | Visual       | No evidence of mechanical damage                  |                   |                                                                                                                                                                                        |        |
| Solvent Resistance        | $\Delta R/R$ | $\pm(0.5\%+0.05\Omega)$ max. of the initial value | 50m $\Omega$ max. | <p>Immerse in static state butyl acetate at 20°C to 25°C for 30<math>\pm</math>5 sec.<br/>Stabilize component at room temperature for 30 min. then measure value.</p>                  |        |
|                           | Visual       | No evidence of mechanical damage                  |                   |                                                                                                                                                                                        |        |

### ENVIRONMENTAL CHARACTERISTICS

| Item                     |        | Standard                              |           | Test Conditions                                                                                                                     |        |
|--------------------------|--------|---------------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------|--------|
|                          |        | Resistor                              | Jumper    | Resistor                                                                                                                            | Jumper |
| Temperature Cycle        | ΔR/R   | ±(1%+0.05Ω) max. of the initial value | 50mΩ max. | (1) Run 5 cycles as follows: -55±3°C for 30 min. 125±3°C for 30 min. Room temp. for 10-15 min.                                      |        |
|                          | Visual | No evidence of mechanical damage      |           | (2) Stabilize component at room temperature for 1 hr. then measure value.                                                           |        |
| Low Temperature Storage  | ΔR/R   | ±(2%+0.1Ω) max. of the initial value  | 50mΩ max. | (1) Dwell in -55°C chamber without loading for 1000 <sup>+48</sup> <sub>-0</sub> hrs.                                               |        |
|                          | Visual | No evidence of mechanical damage      |           | (2) Stabilize component at room temperature for 1 hr. then measure value.                                                           |        |
| High Temperature Storage | ΔR/R   | ±(3%+0.1Ω) max. of the initial value  | 50mΩ max. | (1) Dwell in 125°C chamber without loading for 1000 <sup>+48</sup> <sub>-0</sub> hrs.                                               |        |
|                          | Visual | No evidence of mechanical damage      |           | (2) Stabilize component at room temperature for 1 hr. then measure value.                                                           |        |
| Moisture Resistance      | ΔR/R   | ±(3%+0.1Ω) max. of the initial value  | 50mΩ max. | (1) Dwell in temp.: 65°C RH90 to 95% RH chamber without loading for 1000 <sup>+48</sup> <sub>-0</sub> hrs.                          |        |
|                          | Visual | No evidence of mechanical damage      |           | (2) Stabilize component at room temperature for 1 hr. then measure value.                                                           |        |
| Life Test                | ΔR/R   | ±(3%+0.1Ω) max. of the initial value  | 50mΩ max. | (1) Temp.: 70±3°C Voltage: (rated voltage) on 90 min. off 30 min. Duration: 1000 <sup>+48</sup> <sub>-0</sub> hrs.                  |        |
|                          | Visual | No evidence of mechanical damage      |           | (2) Stabilize component at room temperature for 1 hr. then measure value.                                                           |        |
| Loading Life in Moisture | ΔR/R   | ±(3%+0.1Ω) max. of the initial value  | 50mΩ max. | (1) Temp.: 40±2°C RH: 90-95% Voltage Cycle: on 90 min. (rated voltage) off 30 min. Duration: 1000 <sup>+48</sup> <sub>-0</sub> hrs. |        |
|                          | Visual | No evidence of mechanical damage      |           | (2) Stabilize component at room temperature for 1 hr. then measure value.                                                           |        |

# Packaging of Chip Component




## Automatic Insertion Packaging

### TAPE AND REEL

### REEL DIMENSIONS

millimeters (inches)

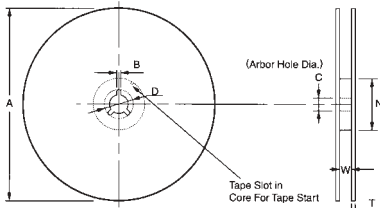


| Tape Size | A Max.      | B Min.          | C                          | D Min.          | N Min.        | W                          | T Max.          |
|-----------|-------------|-----------------|----------------------------|-----------------|---------------|----------------------------|-----------------|
| 8mm       | 178<br>(7)  | 1.50<br>(0.059) | 13.0±0.50<br>(0.512±0.020) | 20.2<br>(0.795) | 50<br>(1.969) | 10.0±1.50<br>(0.394±0.059) | 2.50<br>(0.098) |
|           | 260<br>(10) |                 |                            |                 |               |                            |                 |

Metric dimensions will govern.  
English measurements rounded and for reference only.

millimeters (inches)

### PUNCHED TAPE CONFIGURATION 8MM TAPE ONLY

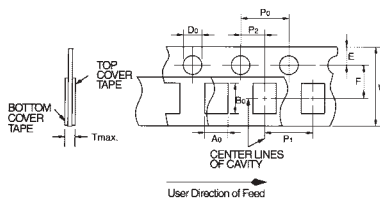


| Tape Size | D <sub>0</sub>                                                                             | E                          | P <sub>0</sub>            | P <sub>2</sub>             | W                          | F                          |
|-----------|--------------------------------------------------------------------------------------------|----------------------------|---------------------------|----------------------------|----------------------------|----------------------------|
| 8mm       | 1.50 <sup>+0.10</sup> / <sub>-0.00</sub><br>(0.059 <sup>+0.004</sup> / <sub>-0.000</sub> ) | 1.75±0.10<br>(0.069±0.004) | 4.0±0.10<br>(0.157±0.004) | 2.00±0.05<br>(0.079±0.002) | 8.00±0.20<br>(0.135±0.008) | 3.50±0.05<br>(0.138±0.002) |

### VARIABLE DIMENSIONS

| Style                   | P <sub>1</sub>                                           | A <sub>0</sub>             | B <sub>0</sub>             | T max.          |
|-------------------------|----------------------------------------------------------|----------------------------|----------------------------|-----------------|
| CR/CJ03<br>CR/CJ05      | 2.00±0.10<br>(0.079±0.004)                               | 0.65±0.10<br>(0.026±0.004) | 1.15±0.10<br>(0.045±0.004) | 0.60<br>(0.024) |
| CR/CJ/FR10              | 4.00±0.10 (0.157±0.004)<br>or<br>2.00±0.10 (0.079±0.004) | 1.10±0.20<br>(0.043±0.008) | 1.90±0.20<br>(0.075±0.008) | 1.10<br>(0.043) |
| CR/CJ/FR21              | 4.00±0.10<br>(0.157±0.004)                               | 1.65±0.20<br>(0.065±0.008) | 2.40±0.20<br>(0.094±0.008) |                 |
| CR/CJ/FR32              |                                                          | 2.00±0.20<br>(0.079±0.008) | 3.60±0.20<br>(0.142±0.008) |                 |
| CRB1A                   |                                                          | 1.90±0.20<br>(0.075±0.008) | 1.90±0.20<br>(0.075±0.008) |                 |
| CRA3A<br>CRB3A<br>CRC3A |                                                          | 2.00±0.20<br>(0.079±0.008) | 3.60±0.20<br>(0.142±0.008) |                 |
| CRB2A                   | 2.00±0.10<br>(0.079±0.004)                               | 1.25±0.20<br>(0.049±0.008) | 2.50±0.20<br>(0.098±0.008) |                 |


### PUNCHED CARRIER

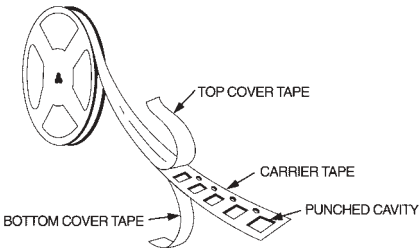


RECOMMENDED LAND PATTERNS IS REFERRED  
THE FOLLOWING FOR EXAMPLE

millimeters (inches)


**CRA3A4E Series**

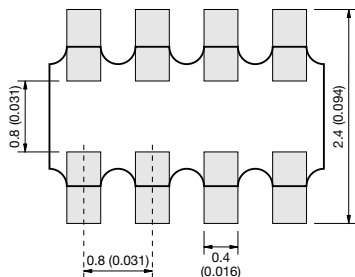


**RNA4A8E Series**

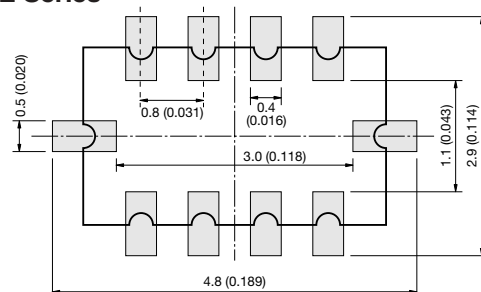


**CRB1A2E Series**




**CRB3A4E Series**

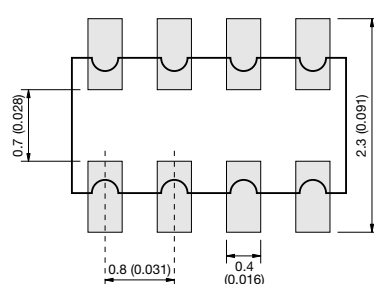


**CRB2A4E Series**

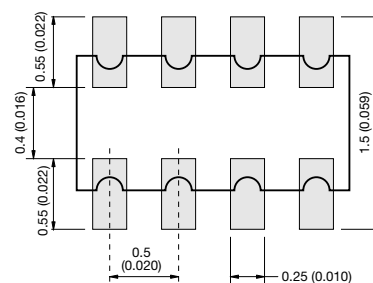


**CRC3A4E Series**

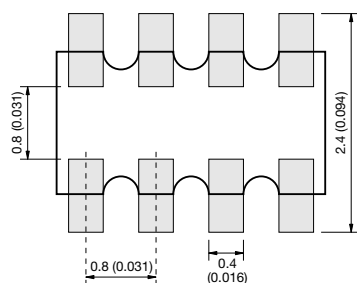


**CRC2A4E Series**

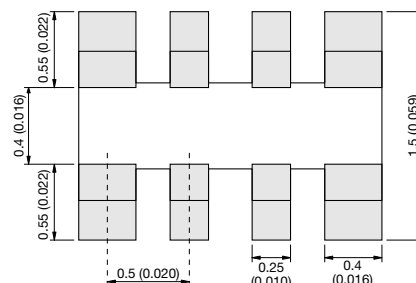

**CRC4A8E Series**

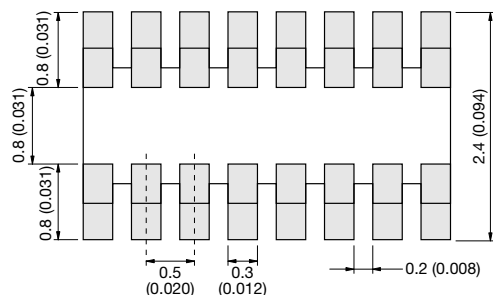

**CRB6A8E Series**

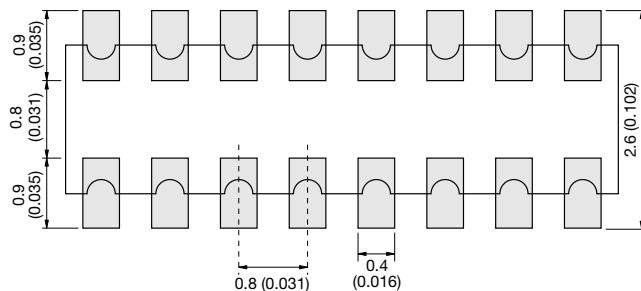



## SAMPLE KIT PART NUMBERS

| Part Number            | Description                                                                                          |
|------------------------|------------------------------------------------------------------------------------------------------|
| <b>CRJ-E6-Kit</b>      | Combination 0603, 0805, 1206, 5% parts<br>21 values per case size<br>100 pcs. per value (approx.)    |
| <b>CR05-E12-Kit</b>    | 0402, 5% parts<br>63 values<br>100 pcs. per value                                                    |
| <b>CR10J-E12-Kit</b>   | 0603, 5% parts<br>63 values<br>100 pcs. per value (approx.)                                          |
| <b>CR21J-E12-Kit</b>   | 0805, 5% parts<br>63 values<br>100 pcs. per value (approx.)                                          |
| <b>CR32J-E12-Kit</b>   | 1206, 5% parts<br>63 values<br>100 pcs. per value (approx.)                                          |
| <b>CR05F-E24-Kit</b>   | 0402, 1% parts<br>63 values<br>100 pcs. per value                                                    |
| <b>CR10F-E24-Kit</b>   | 0603, 1% parts<br>63 values<br>100 pcs. per value                                                    |
| <b>CR-ARRAY-E6-Kit</b> | Arrays, Various styles, CRA, CRB, CRC, RNA, 5%<br>13 values per style (approx.)<br>20 pcs. per value |

## FREQUENCY BAND CHART

| Product Name                        |                  | Type   | Oscillating Frequency |       |        |       |             |             |             |             | Applications      |
|-------------------------------------|------------------|--------|-----------------------|-------|--------|-------|-------------|-------------|-------------|-------------|-------------------|
|                                     |                  |        | 1kHz                  | 10kHz | 100kHz | 1MHz  | 10MHz       | 100MHz      | 1GHz        | 10GHz       |                   |
| Ceramic Resonator                   | MHz Band         | Leaded |                       |       |        | 1.92M | <div></div> | 13.0M       |             |             | MicroProcessor    |
|                                     |                  | SMD    |                       |       |        | 2.0M  | <div></div> | 60.0M       |             |             | MicroProcessor    |
| SAW Resonator                       |                  | Leaded |                       |       |        |       | 55M         | <div></div> | 500M        |             | RF Modulator      |
|                                     |                  | SMD    |                       |       |        |       |             | 300M        | <div></div> | 500M        | Keyless Entry     |
| Clock Oscillator                    | Clock Oscillator | SMD    |                       |       |        |       | 8.0M        | <div></div> | 75M         |             | MicroProcessor    |
|                                     | TCXO             | SMD    |                       |       |        |       | 12.0M       | <div></div> | 26.0M       |             | Telecommunication |
| Voltage Controlled Oscillator (VCO) | VK Series        | SMD    |                       |       |        |       |             | 100M        | <div></div> | 700M        | Telecommunication |
|                                     | YK Series        | SMD    |                       |       |        |       |             |             | 700M        | <div></div> | 2.0G              |



## **Product Discontinuation - Leaded Resonators**

We would like to thank you for your patronage and support for our products.

AVX is in the process of discontinuing the Leaded MHz Ceramic Resonator offering. We have chosen the effective dates below so that our customers and distributors may entertain last time purchases.

**FINAL Order Acceptance:** February 1<sup>st</sup>, 2004

**LAST Shipment:** May 1<sup>st</sup>, 2004

The specific products subject to this notice are: **ALL KBR Series**

### **2-Terminal (No Built-In Capacitor) LEADED Resonators**

- KBR-x.xxM
- KBR-x.xxMS
- KBR-x.xxMSA
- KBR-x.xxMSB
- KBR-x.xxMSE

### **3-Terminal (Built-In Capacitor) LEADED Resonators**

- KBR-x.xxMKC
- KBR-x.xxMKD
- KBR-x.xxMKS
- KBR-x.xxMKE

(Both bulk and T & R packages)

We regret any inconvenience caused by this action.

Should you have any questions or comments, please contact KDP Marketing for details.

# MHz Band Ceramic Resonators

KBR, -M, MS, -MSA, -MSB Series



$f_0$ : 1.92 to 13.00MHz



## FEATURES

- Small, lightweight design
- Excellent temperature stability
- Low cost
- Bulk packaged 500 pieces per bag or 2000 pieces per reel
- Sold in increments of 2000 pieces

## HOW TO ORDER

**KBR - 4.00 MSA TR**

### Packaging

TR = Tape and reel  
TF = Ammo pack  
□ = Bulk

### Resonator Type

MS = 1.92 to 3.57MHz  
MSA = 3.58 to 8.00MHz  
(Washable Type)  
MSB = 3.58 to 6.00MHz  
M = 8.00 to 13.00MHz


### Oscillation Frequency (MHz)

### Series


## SPECIFICATIONS (KBR-□MS/KBR-□MSA/KBR-□MSB/KBR-□M Series)

| Series                                     | MS              | MSA/MSB         | M                |
|--------------------------------------------|-----------------|-----------------|------------------|
| Dimension                                  | Fig. A          | Fig. B          | Fig. C           |
| Oscillation Frequency                      | 1.92 to 3.50MHz | 3.58 to 8.00MHz | 8.00 to 13.00MHz |
| Frequency Tolerance                        | ±0.5%           | ±0.5%           | ±0.5%            |
| Resonant Impedance                         | 100Ω Max.       | 30Ω Max.        | 40Ω Max.         |
| Temperature Characteristics (-20 to +80°C) | ±0.3%           | ±0.3%           | ±0.5%            |

## DIMENSIONS

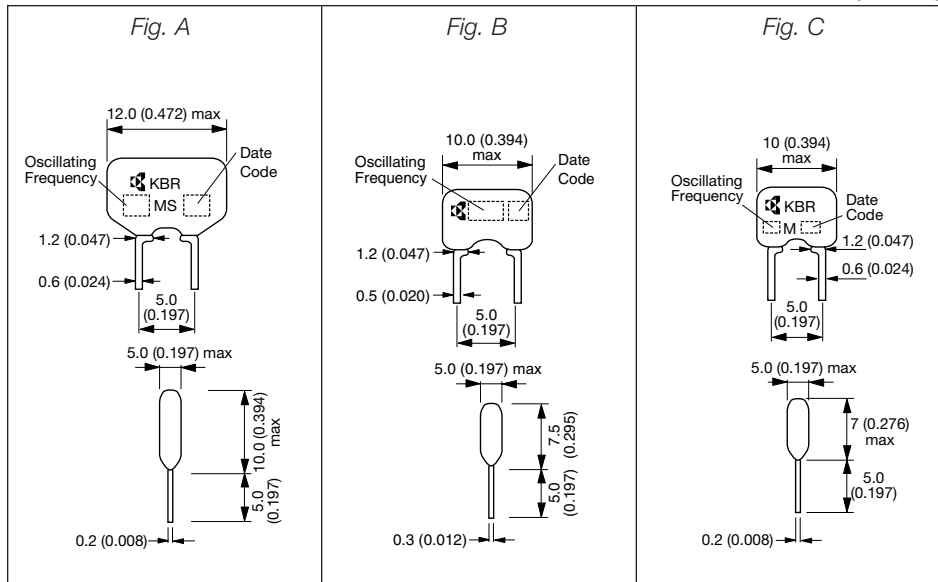

## TEST CIRCUIT

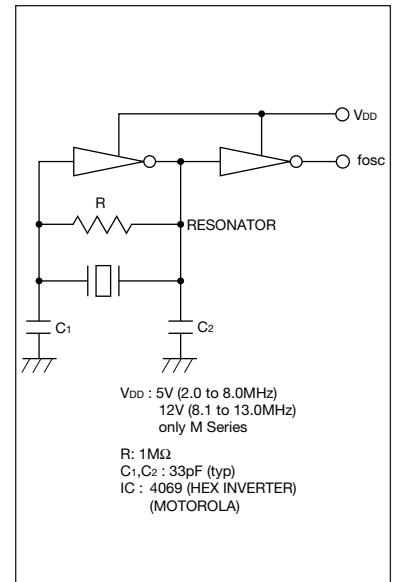


# Built-in Capacitor



## MHz Band Ceramic Resonators KBR-MKS/MKD Series




### TEST CIRCUIT

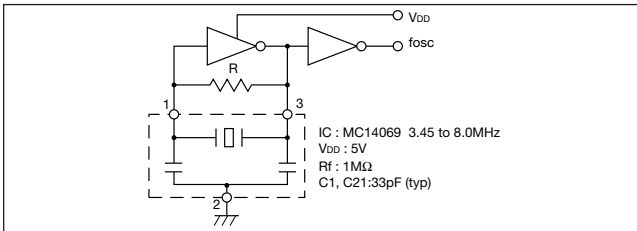

### TAPING

millimeters (inches)

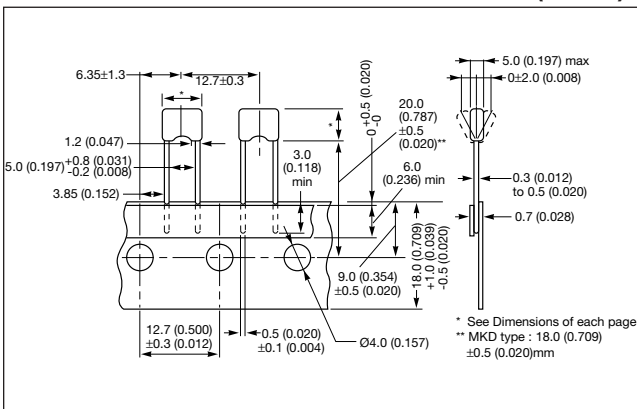

### DIMENSIONS

millimeters (inches)

#### 3.52 to 8.0MHz (MKS type)

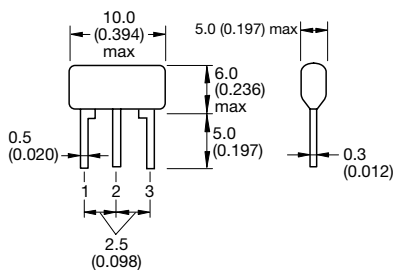


Figure A

#### 3.52 to 8.0MHz (MKD type)

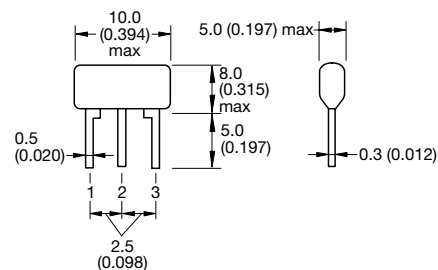


Figure B

### SPECIFICATIONS

| Series   | Frequency Range (MHz) | Figure | Frequency Tolerance | Temperature Stability (-20 to 80°C) | Standard Frequencies (MHz)         | Taping    |
|----------|-----------------------|--------|---------------------|-------------------------------------|------------------------------------|-----------|
| KBR-□MKS | 3.52 to 8.00          | Fig. A | ±0.5%               | ±0.5%                               | 3.58, 4.00, 4.19, 5.00, 6.00, 8.00 | Available |
| KBR-□MKD | 3.52 to 8.00          | Fig. B | ±0.5%               | ±0.5%                               | 3.58, 4.00, 4.19, 5.00, 6.00, 8.00 | Available |

Please contact your local AVX sales office for custom frequency.

### FEATURES

- Component (Capacitor) cost and space saving
- Mounting cost saving
- High density mounting possible

### APPLICATIONS

- Clock for micro computer
- Telephone
- Frequency synthesizer
- Voice synthesizer IC
- Motor control unit
- Remote controller

### HOW TO ORDER

KBR - 4.00 MKS TR

#### Packaging

- TR = Tape and reel 2,000 pcs
- TF = Ammopack
- = Bulk

#### Type

- MKS = Capacitor built-in low profile type
- MKD = Capacitor built-in washable type


#### Oscillating Frequency (MHz)

#### Series

# MHz Band Ceramic Resonators (SMD) PBRC-G Series




## TEST CIRCUIT

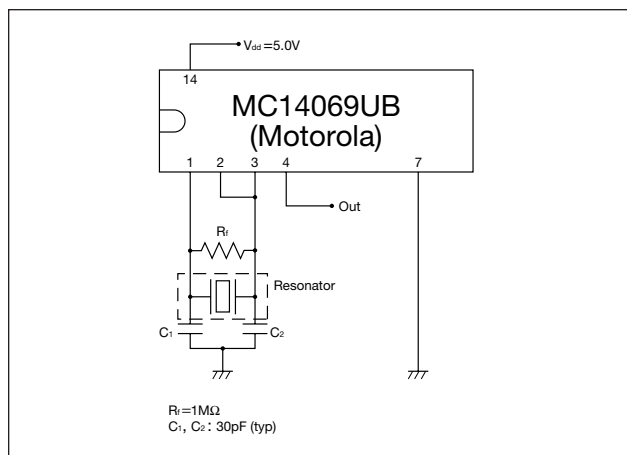

## DIMENSIONS

millimeters (inches)

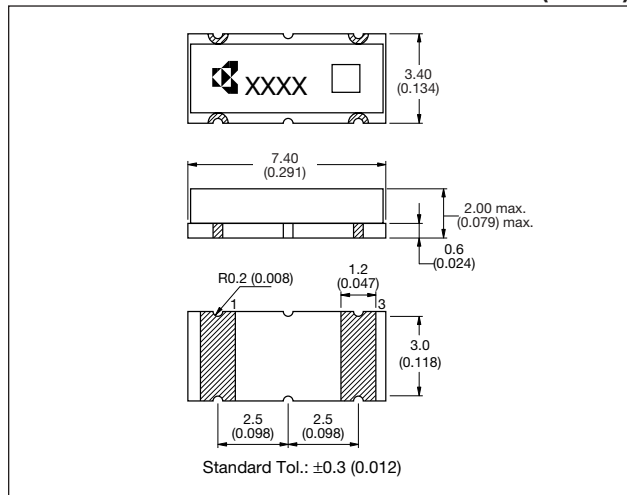

## FEATURES

- Excellent frequency stability
- Low profile
- Reflow solderable
- Excellent solderability (Nickel barrier + Au flash termination)

## APPLICATIONS

- Car Accessories
- Cam-corders
- Digital Cameras
- PDAs
- PC Peripherals

## HOW TO ORDER

PBRC - 4.00 G R □

### Tolerance

- = ±0.5% (Standard)
- 03 = ±0.3% (Option)

### Packaging

Tape and reel, 2,000 pcs/reel

**G: No Built-in Capacitor**

### Oscillating Frequency (MHz)

3.58 to 8.00MHz


### Series

Note: C1 & C2 are referenced capacitance value to measure each parameter under. Test circuit (IC = MC14069UB).  
C1 & C2 values would be modified - depend upon various IC to be used.


## SPECIFICATIONS

| Series | Frequency Range | Frequency Tolerance (25°C) | Temperature Stability | IC                 | Standard Frequency (MHz)     |
|--------|-----------------|----------------------------|-----------------------|--------------------|------------------------------|
| PBRC-G | 3.58 to 8.00    | ±.05% (op. ±0.3%)          | ±.05% (-40 to 85°C)   | MC14069UB MOTOROLA | 3.58, 4.00, 4.19, 6.00, 8.00 |


## Recommended Land Pattern

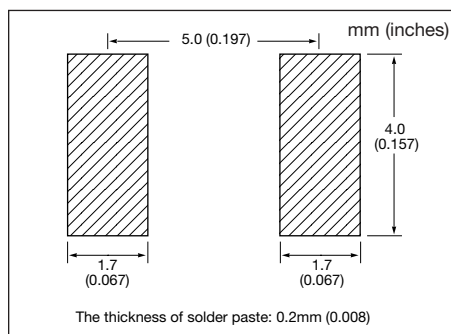

## Recommended Reflow Profile

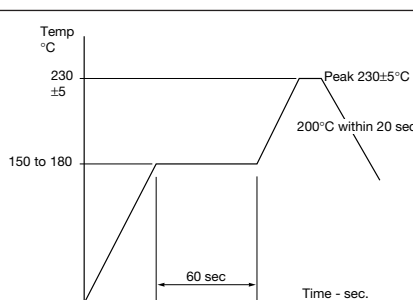

## Packaging - Taping

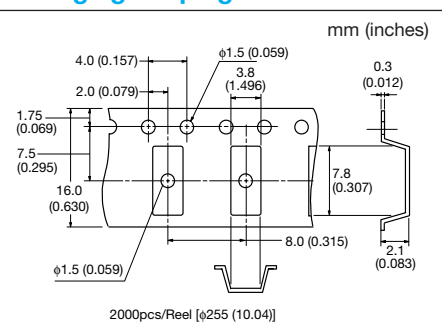


# MHz Band Ceramic Resonators

## (SMD) PBRC-H Series




### TEST CIRCUIT

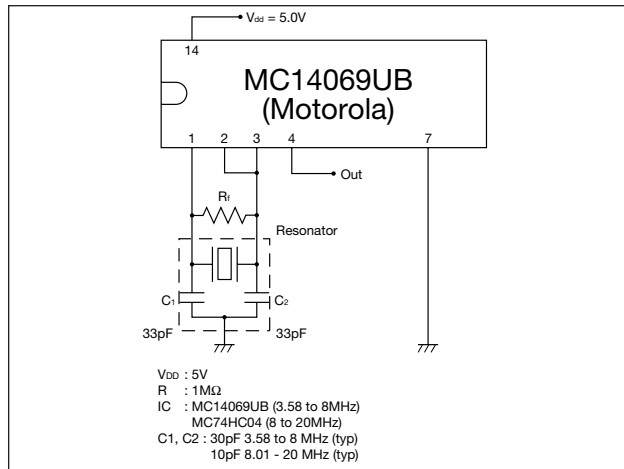

### DIMENSIONS

millimeters (inches)

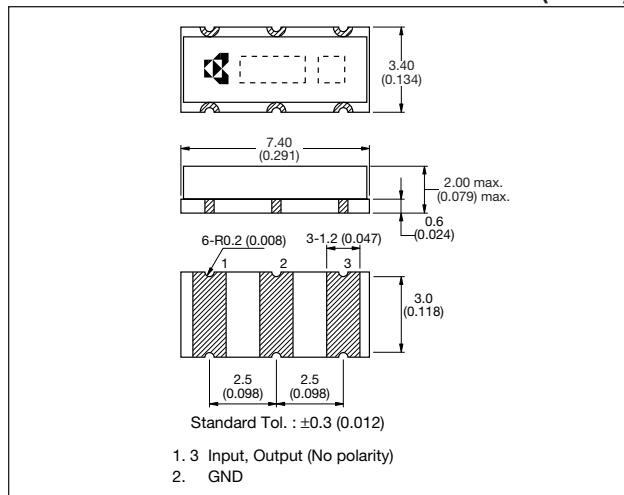

### FEATURES

- Excellent frequency stability
- Low profile
- Reflow solderable
- Excellent solderability (Nickel barrier + Au flash termination)

### APPLICATIONS

- Car Accessories
- Cam-corders
- Digital Cameras
- PDAs
- PC Peripherals

### HOW TO ORDER

PBRC - 4.00 H R □

#### Tolerance

|    | 2.00 to 8.00 | 8.01 to 20.00          |
|----|--------------|------------------------|
| □  | $\pm 0.5\%$  | $\pm 0.7\%$ (Standard) |
| 03 | $\pm 0.3\%$  | —                      |
| 05 | —            | $\pm 0.5\%$            |

#### Packaging

Tape and reel, 2,000 pcs/reel

#### H: Built-in Capacitor

#### Oscillating Frequency (MHz)

3.58 to 20.00MHz


#### Series

Note: Please refer to IC Application Guide book for IC matching


### SPECIFICATIONS

| Series | Frequency Range (MHz) | Tolerance (25°C)                  | Temperature Stability        | IC                 | Standard Frequencies           |
|--------|-----------------------|-----------------------------------|------------------------------|--------------------|--------------------------------|
| PBRC-H | 3.58 to 8.00          | $\pm 0.5\%$<br>(op. $\pm 0.3\%$ ) | $\pm 0.5\%$<br>(-40 to 85°C) | MOTOROLA MC74HC04  | 3.58, 4.00, 4.19<br>6.00, 8.00 |
|        | 8.01 to 20.00         | $\pm 0.7\%$<br>(op. $\pm 0.5\%$ ) | $\pm 0.1\%$<br>(-40 to 85°C) | MOTOROLA MC14069UB | 10.0, 12.0,<br>16.0, 20.0      |


### Recommended Land Pattern

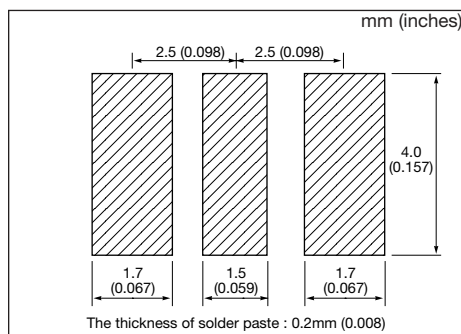

### Recommended Reflow Profile

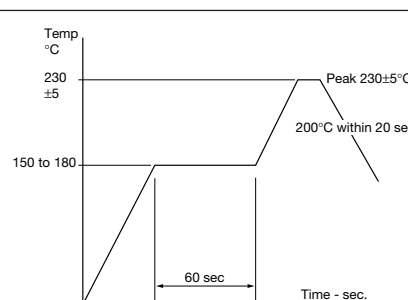

### Packaging - Taping

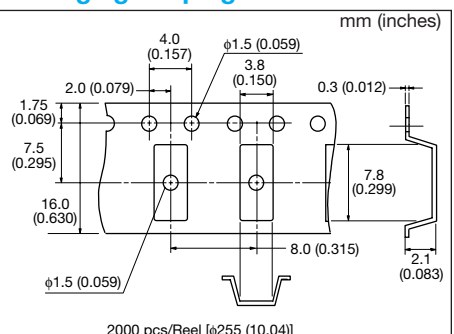



# MHz Band Ceramic Resonators (SMD) for Automotive PBRV-H Series




## FEATURES

- High reliable, excellent frequency stability
- Robust shock resistant
- Reflow solderable and washable
- Excellent solderability (Nickel barrier + Au flash termination)

## APPLICATIONS


- ABS
- ECU
- Air-Bag System

## TEST CIRCUIT

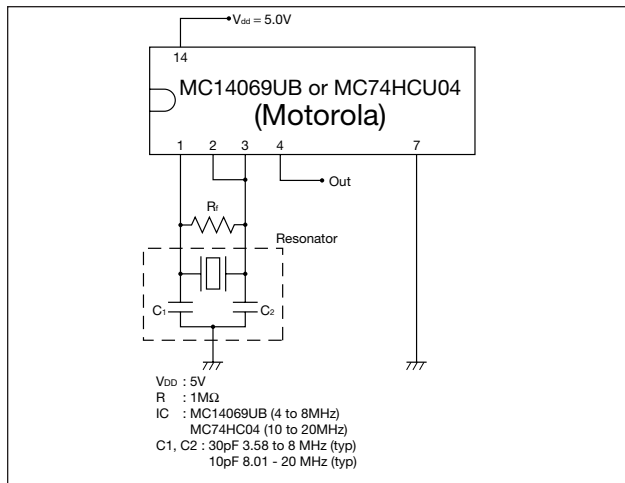

## DIMENSIONS

millimeters (inches)

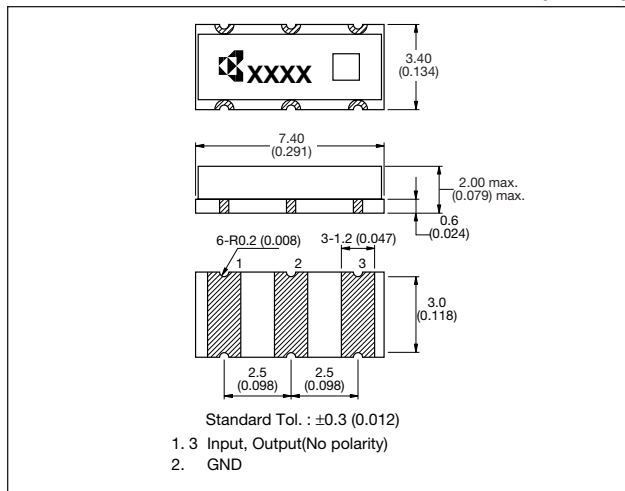

## HOW TO ORDER

PBRV - 4.00 H R Y

Operating Temperature Range

Y = -40 to +125°C  
Z = -40 to +150°C

Packaging

Tape and reel, 2,000 pcs/reel

Built-in Capacitor

Oscillating Frequency (MHz)

3.58 to 20.00MHz


Series

Note: Please refer to IC Application Guide book for IC matching


## SPECIFICATIONS

| Series | Frequency Range (MHz) | Tolerance (25°C)  | Temperature Stability                                | IC                 | Standard Frequencies   |
|--------|-----------------------|-------------------|------------------------------------------------------|--------------------|------------------------|
| PBRV-H | 3.58 to 8.00          | ±0.5% (op. ±0.3%) | Y = ±0.5% (-40 to 125°C)<br>Z = ±0.5% (-40 to 150°C) | MOTOROLA MC14069UB | 4.00, 6.00, 8.00       |
|        | 8.01 to 20.00         | ±0.7% (op. ±0.5%) | Y = ±0.1% (-40 to 125°C)<br>Z = ±0.2% (-40 to 150°C) | MOTOROLA MC74HC04  | 12.0, 16.0, 18.0, 20.0 |


## Recommended Land Pattern

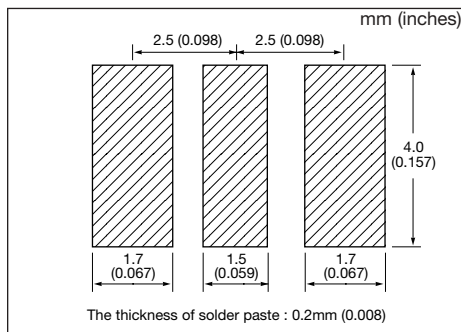

## Recommended Reflow Profile

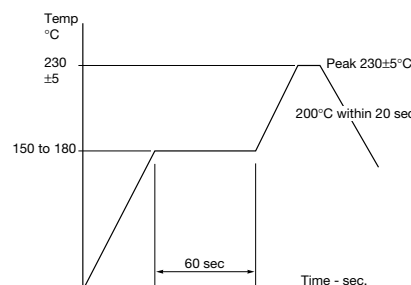

## Packaging - Taping

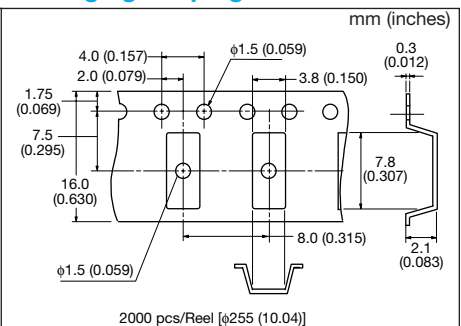


# MHz Band Ceramic Resonators (SMD)



## PACKAGING

millimeters (inches)

Reel

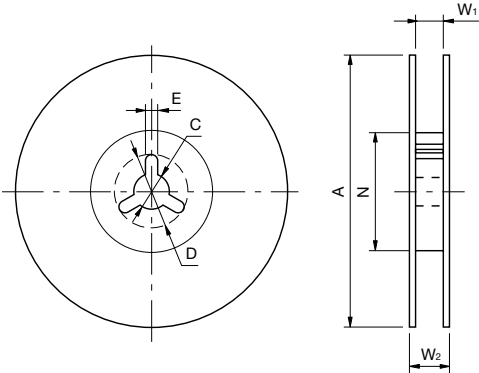


2,000 pcs/reel

| Code | A                         | N                        | W <sub>1</sub>                                                                         | W <sub>2</sub>            | C                          | D                          | E                          |
|------|---------------------------|--------------------------|----------------------------------------------------------------------------------------|---------------------------|----------------------------|----------------------------|----------------------------|
| Dim. | 250±2.00<br>(9.843±0.079) | 80±2.00<br>(3.150±0.079) | 16.5 <sup>+1.10</sup> <sub>-0.00</sub><br>(0.650 <sup>+0.043</sup> <sub>-0.000</sub> ) | 23.6 max.<br>(0.929 max.) | 13.0±0.50<br>(0.512±0.020) | 21.0±0.80<br>(0.827±0.031) | 2.00±0.50<br>(0.079±0.020) |

## NOTICE

- Handling must be fully cared to avoid any failure, in case it is loaded over rated mechanical shock or vibration.
- Product is available for reflow soldering process, but not applicable for flow soldering.
- Land must be oriented as shown without applying excess stress by bending substrate.

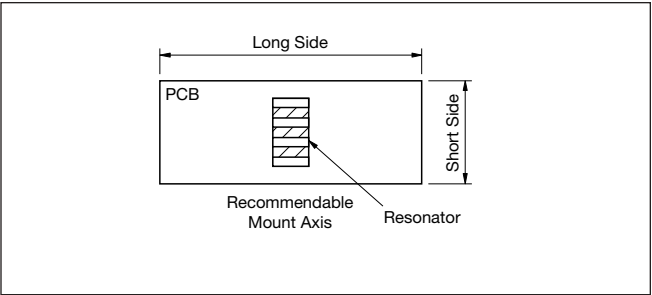



# MHz Band Ceramic Resonators (SMD) SSR-D Series




## FEATURES

- Fundamental (20 to 30MHz)
- Miniature size (2.5x2.0x1.0mm)
- High density mounting possible
- Wide frequency range
- Washable

## APPLICATIONS


- CD-R/W
- Hard Disk Drive
- DVD-ROM
- MD
- Printer
- Cellular (CDMA/PCS)
- Portable Electronic Equipment
- Memory Card

## HOW TO ORDER

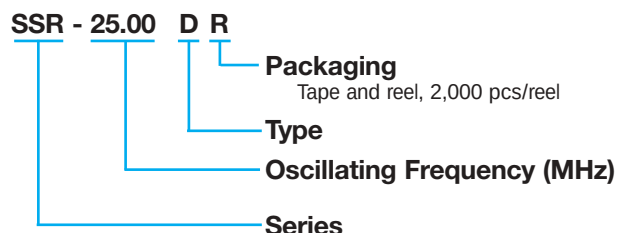


## DIMENSIONS

millimeters (inches)

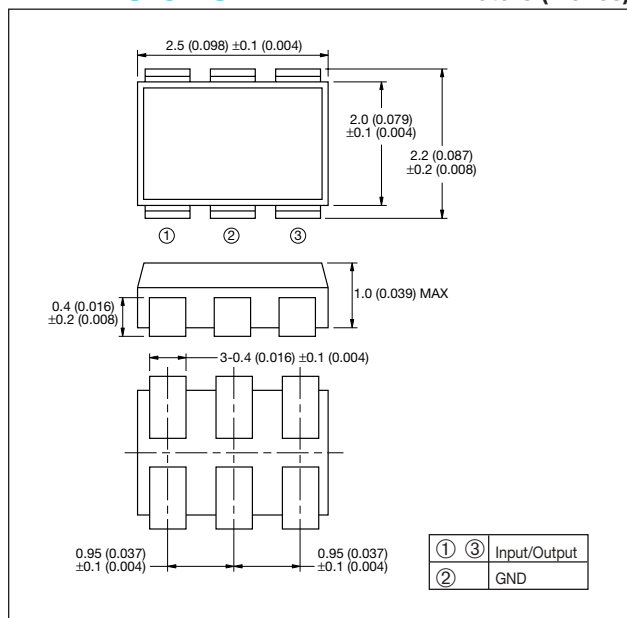

## TEST CIRCUIT

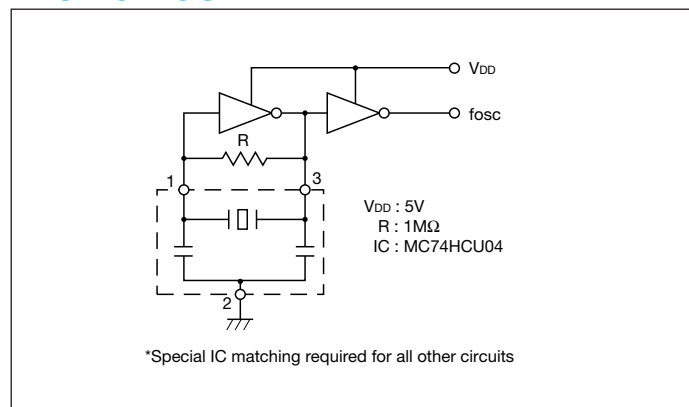


## SPECIFICATIONS


| Frequency Range | Frequency Tolerance (25°C) | Temperature Stability (-20 to 80°C) | IC                 | Main Frequency (MHz)          |
|-----------------|----------------------------|-------------------------------------|--------------------|-------------------------------|
| 20.0 to 60.0MHz | ±0.5%                      | ±0.3%                               | MC74HCU04 MOTOROLA | 20.0, 25.0, 30.0, 33.86, 40.0 |

Please contact your local AVX office for IC matching.


## Recommended Land Pattern

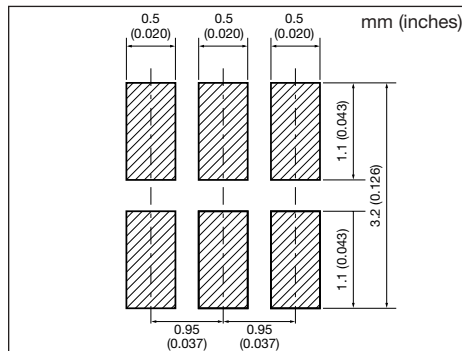

## Recommended Reflow Profile

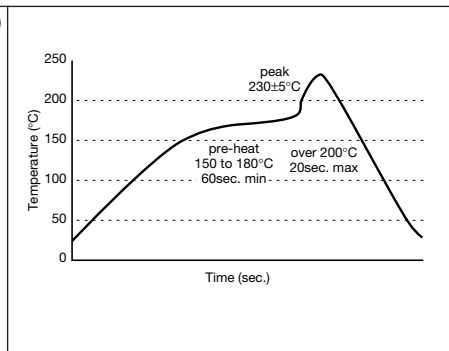

## Packaging - Taping

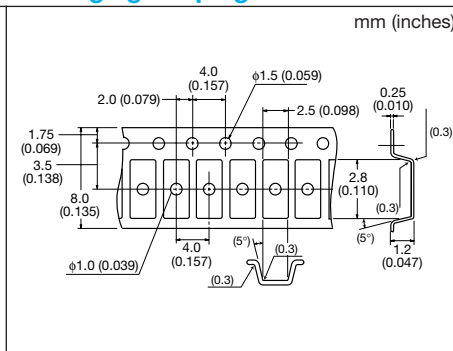

# SAW Resonators



## KAR Series



### FEATURES

- 2 channels in one package
- High anti-shock stability
- Excellent Spurious response
- Low temperature coefficient
- Adjustment free
- Saving component cost and space

### APPLICATIONS

- RF modulator of VCR, video disk player and CATV
- Remote keyless entry, garage openers

### HOW TO ORDER

KAR - 91 CS

Specification

Please see Table 1 and Table 2

Resonant Frequency (MHz)

Series

### DIMENSIONS

millimeters (inches)

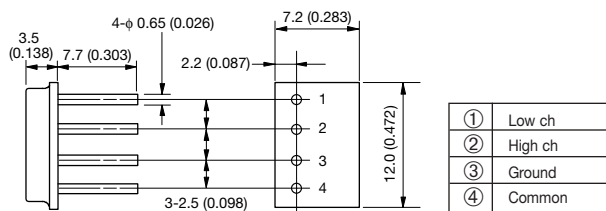


Figure A

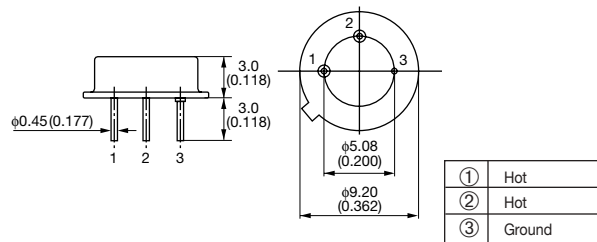


Figure B

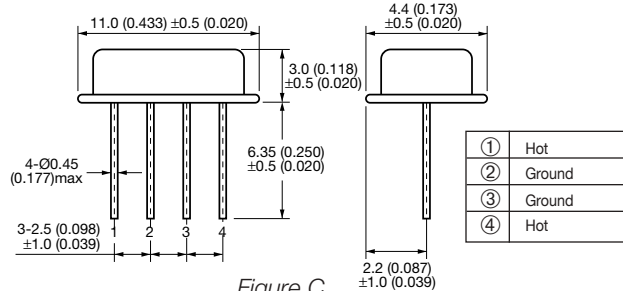


Figure C

### SPECIFICATIONS (for RF Module and CATV Converter)

Table 1

| Part Number | Channels*        | Resonant Frequency (MHz)     | Resonant Loss (dB) | Parallel Capacitance (pF) | Temperature Characteristics (ppm/°C) | Dimension |
|-------------|------------------|------------------------------|--------------------|---------------------------|--------------------------------------|-----------|
| KAR-55CS    | W- $\frac{3}{4}$ | 55.240±0.080<br>62.240±0.080 | 5.0 Max.           | 4.8±1<br>4.8±1            | ±8                                   | Fig. A    |
| KAR-55CT    | U- $\frac{2}{3}$ | 55.240±0.080<br>61.240±0.080 | 6.0 Max.           | 3.6±1<br>3.7±1            | ±8                                   |           |
| KAR-61CT    | U- $\frac{3}{4}$ | 61.240±0.080<br>67.240±0.080 | 5.0 Max.           | 4.4±1<br>4.2±1            | ±8                                   |           |
| KAR-77CS    | O- $\frac{3}{4}$ | 77.240±0.080<br>85.240±0.080 | 4.5 Max.           | 3.1±1<br>2.8±1            | ±8                                   |           |
| KAR-91CS    | J- $\frac{1}{2}$ | 91.240±0.080<br>97.240±0.080 | 3.0 Max.           | 4.0±1<br>4.0±1            | ±5                                   |           |
| KAR-211CS   | U-13             | 211.240±0.150                | 2.7 Max.           | 3.0±1                     | ±8                                   |           |
| KAR-108CS   | CATV             | 108.200±0.030                | 3.0 Max.           | 5.0 Max.                  | ±8                                   |           |
| KAR-117CS   | CATV             | 117.200±0.030                | 3.0 Max.           | 5.0 Max.                  | ±8                                   |           |
| KAR-119CS   | CATV             | 119.200±0.030                | 3.0 Max.           | 5.0 Max.                  | ±8                                   |           |

\*J = Japan U = United States W = Germany A = Australia O = Eastern Europe

### SPECIFICATIONS (for Remote Keyless Entry)

Table 2

| Part Number | Resonant Frequency (MHz) | Resonant Loss (dB) | Parallel Capacitance (pF) | Temperature Characteristics (ppm/°C) | Dimension |
|-------------|--------------------------|--------------------|---------------------------|--------------------------------------|-----------|
| KAR-303CS   | 303.875±0.250            | 2.5 Max.           | 4.0 Max.                  | ±8 Max.                              | Fig. A    |
| KAR-304CS   | 304.300±0.250            |                    |                           |                                      |           |
| KAR-310CS   | 310.000±0.250            |                    |                           |                                      |           |
| KAR-314CS   | 314.000±0.250            |                    |                           |                                      |           |
| KAR-314CT   | 314.500±0.250            |                    |                           |                                      |           |
| KAR-315CS   | 315.000±0.250            |                    |                           |                                      |           |
| KAR-320CS   | 320.650±0.250            |                    |                           |                                      |           |
| KAR-345CS   | 345.000±0.250            |                    |                           |                                      |           |
| KAR-359CS   | 359.900±0.250            |                    |                           |                                      |           |
| KAR-417CS   | 417.500±0.250            |                    |                           |                                      |           |
| KAR-418CS   | 418.000±0.250            |                    |                           |                                      |           |
| KAR-423CS   | 423.220±0.250            |                    |                           |                                      |           |
| KAR-432CS   | 432.920±0.250            |                    |                           |                                      |           |
| KAR-433CS   | 433.920±0.250            |                    |                           |                                      |           |
| KAR-433CT   | 433.420±0.250            |                    |                           |                                      |           |
| KAR-479CS   | 479.500±0.500            |                    |                           |                                      |           |
| KAR-303CK   | 303.875±0.250            | 2.5 Max.           | 4.0 Max.                  | ±8 Max.                              | Fig. B    |
| KAR-304CK   | 304.300±0.250            |                    |                           |                                      |           |
| KAR-310CK   | 310.000±0.250            |                    |                           |                                      |           |
| KAR-314CK   | 314.000±0.250            |                    |                           |                                      |           |
| KAR-314CL   | 314.500±0.250            |                    |                           |                                      |           |
| KAR-315CK   | 315.000±0.250            |                    |                           |                                      |           |
| KAR-320CK   | 320.650±0.250            |                    |                           |                                      |           |
| KAR-345CK   | 345.000±0.250            |                    |                           |                                      |           |
| KAR-359CK   | 359.900±0.250            |                    |                           |                                      |           |
| KAR-417CK   | 417.500±0.250            |                    |                           |                                      |           |
| KAR-418CK   | 418.000±0.250            |                    |                           |                                      |           |
| KAR-423CK   | 423.220±0.250            |                    |                           |                                      |           |
| KAR-432CK   | 432.920±0.250            |                    |                           |                                      |           |
| KAR-433CK   | 433.920±0.250            |                    |                           |                                      |           |
| KAR-433CL   | 433.420±0.250            |                    |                           |                                      |           |
| KAR-479CK   | 479.500±0.500            |                    |                           |                                      |           |
| KAR-303CF   | 303.875±0.250            | 2.5 Max.           | 4.0 Max.                  | ±8 Max.                              | Fig. C    |
| KAR-304CF   | 304.300±0.250            |                    |                           |                                      |           |
| KAR-310CF   | 310.000±0.250            |                    |                           |                                      |           |
| KAR-314CF   | 314.000±0.250            |                    |                           |                                      |           |
| KAR-314CG   | 314.500±0.250            |                    |                           |                                      |           |
| KAR-315CF   | 315.000±0.250            |                    |                           |                                      |           |
| KAR-320CF   | 320.650±0.250            |                    |                           |                                      |           |
| KAR-345CF   | 345.000±0.250            |                    |                           |                                      |           |
| KAR-359CF   | 359.900±0.250            |                    |                           |                                      |           |
| KAR-417CF   | 417.500±0.250            |                    |                           |                                      |           |
| KAR-418CF   | 418.000±0.250            |                    |                           |                                      |           |
| KAR-423CF   | 423.220±0.250            |                    |                           |                                      |           |
| KAR-432CF   | 432.920±0.250            |                    |                           |                                      |           |
| KAR-433CF   | 433.920±0.250            |                    |                           |                                      |           |
| KAR-433CG   | 433.420±0.250            |                    |                           |                                      |           |
| KAR-479CF   | 479.500±0.500            |                    |                           |                                      |           |

JPN = Japan U = United States EU = Eastern Europe

The other frequency, please contact your nearest sales office.

# SAW Resonators (SMD)



## PARS Series



### FEATURES


- Frequency range 300 to 480MHz
- 1 port type SMD resonator
- Small size (5.5x3.8mm)
- Low profile (1.5mm max.)
- SMT ceramic package
- High reliability sealing
- Excellent temperature characteristics
- +100ppm to -250ppm (-40 to 85°C)

### APPLICATIONS


- Keyless entry systems
- Security systems
- Garage openers

### DIMENSIONS

millimeters (inches)

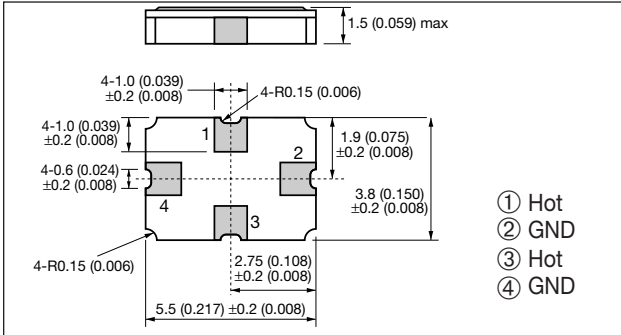


### RECOMMENDED LAND PATTERN

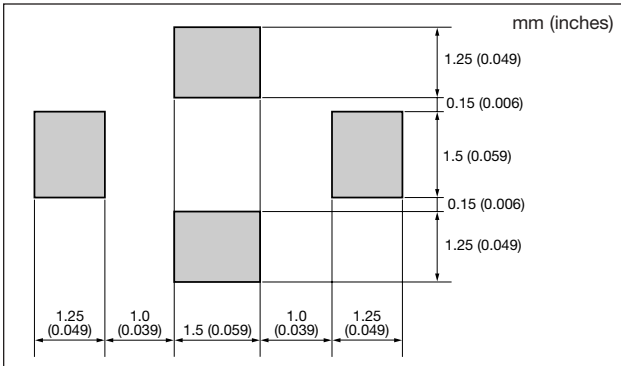

### PACKAGING

mm (inches)

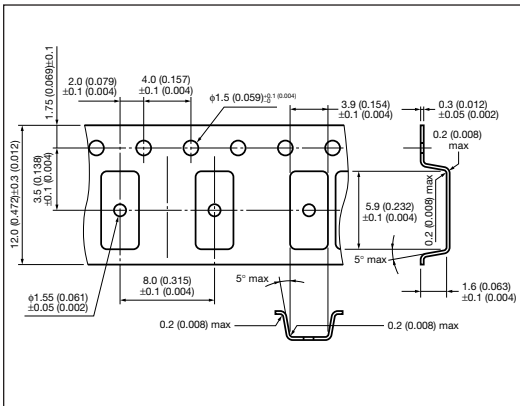

### HOW TO ORDER

PARS 315.00 K 00 R


#### Packaging

R = Tape and reel, 2,000 pcs/reel

#### Frequency Tolerance or Custom Specs

|     |              |     |           |
|-----|--------------|-----|-----------|
| 00  | ±250kHz      | 03  | ±100kHz   |
| 01  | ±200kHz      | 04  | ±75kHz    |
| 02  | ±150kHz      | 10≥ | Tolerance |
| 11≤ | Custom Specs |     |           |

#### Marking Code



(4 digits Frequency Marking)

| Resonant Frequency (MHz) | Marking Code | Resonant Frequency (MHz) | Marking Code |
|--------------------------|--------------|--------------------------|--------------|
| 304.45                   | 304 L        | 423.22                   | 423 K        |
| 310.00                   | 310 K        | 432.92                   | 432 K        |
| 314.00                   | 314 K        | 433.42                   | 433 L        |
| 314.50                   | 314 L        | 433.92                   | 433 K        |
| 315.00                   | 315 K        | 479.50                   | 479 L        |
| 320.65                   | 320 K        |                          |              |

#### Resonant Frequency (MHz) Series

### SPECIFICATIONS


| Part Number    | Resonant Frequency (MHz) | Resonant Loss (dB) | Parallel Capacitance (pF) | Temperature Characteristics (ppm/°C) |
|----------------|--------------------------|--------------------|---------------------------|--------------------------------------|
| PARS303.00N00R | 303.000±0.250            | 2.5 Max.           | 4.0 Max.                  | ±8 Max.                              |
| PARS303.33L00R | 303.330±0.250            |                    |                           |                                      |
| PARS303.82M00R | 303.825±0.250            |                    |                           |                                      |
| PARS303.87K00R | 303.875±0.250            |                    |                           |                                      |
| PARS304.30K00R | 304.300±0.250            |                    |                           |                                      |
| PARS304.45L00R | 304.450±0.250            |                    |                           |                                      |
| PARS310.00K00R | 310.000±0.250            |                    | 3.2 Max.                  |                                      |
| PARS314.00K00R | 314.000±0.250            |                    |                           |                                      |
| PARS314.50K00R | 314.500±0.250            |                    |                           |                                      |
| PARS315.00K00R | 315.000±0.250            |                    |                           |                                      |
| PARS320.65K00R | 320.650±0.250            |                    |                           |                                      |
| PARS345.00K00R | 345.000±0.250            |                    |                           |                                      |
| PARS418.00K00R | 418.000±0.250            |                    |                           |                                      |
| PARS423.22K00R | 423.220±0.250            |                    |                           |                                      |
| PARS432.92K00R | 432.920±0.250            |                    |                           |                                      |
| PARS433.42L00R | 433.420±0.250            |                    |                           |                                      |
| PARS433.92K00R | 433.920±0.250            |                    |                           |                                      |
| PARS479.50K00R | 479.500±0.500            |                    |                           |                                      |

Please contact your local sales office for custom frequency.

KYOCERA



millimeters (inches)

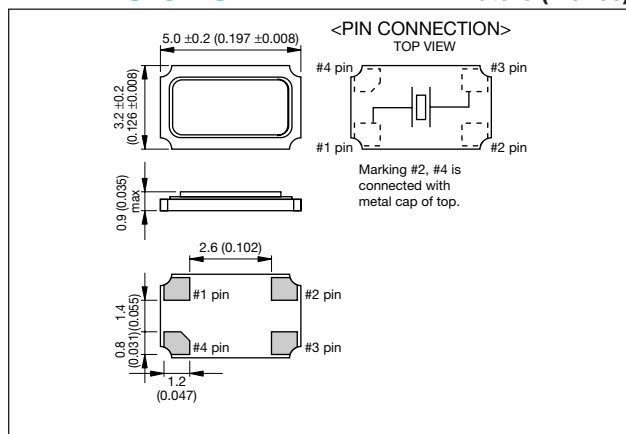[illegible]

Temp (°C)

250

200

150

100

50

0

1 2 3 4 5

Time (min)

Ramp-Up 1-3°C/s

Hold-Time 1-2min

260°C  $\pm$  5°C 10sec(MAX)

200°C Over 30-45sec

Cool Down 2.5-5°C/s

- Reference frequency for telecommunication system is in product line up
- Reflow soldering available
- Using Ceramic Package of which reliability is high
- Small, low profile and market standard dimensions

- Mobile phone
- IC Card
- GPS

**KSX-35-13000K C A-Q C 0 R**

**Nominal —**  
**Frequency**

| Code   | Freq. (MHz) |
|--------|-------------|
| 13000K | 13.000000   |
| 14400K | 14.400000   |
| 16800K | 16.800000   |
| 19200K | 19.200000   |
| 19440K | 19.440000   |
| 19680K | 19.680000   |
| 19800K | 19.800000   |
| 26000K | 26.000000   |

- **Packaging**

R = Taping

- Frequency Offset

0 = 0Hz (Standard)

- Frequency
- Temperature
- Stability

$C = \pm 15 \text{ ppm}$

- Operating Temperature

$T = -30^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

**Frequency Stability**  
A =  $\pm 10\text{ppm}$

$$A = \pm 10 \text{ ppm}$$

- **Load Capacitance**  
C = 12pF

| Parameters                | Symbol           | Specification        | Remark                                      |
|---------------------------|------------------|----------------------|---------------------------------------------|
| Nominal Frequency         | f0               | 13 to 26MHz          | —                                           |
| Mode of Vibration         | —                | Fundamental          | Standard                                    |
| Load Capacitance          | CL               | 12.0pF               | Standard                                    |
| Frequency Stability       | $\Delta f/f$     | $\pm 10.0\text{ppm}$ | $+25^{\circ}\text{C} \pm 2^{\circ}\text{C}$ |
| Storage Temp.             | T <sub>STG</sub> | -40°C to +85°C       | —                                           |
| Operating Temp.           | T <sub>OPR</sub> | -30°C to +85°C       | for Mobile Phone                            |
| Frequency Temp. Stability | $\Delta f/T$     | $\pm 15.0\text{ppm}$ | for Mobile Phone                            |
| Series Resistance         | CI               | 50Ω(max.)            | Different by Nominal Frequency              |



# MHz Band Quartz Crystal




## KSX-36 Series




### DIMENSIONS


millimeters (inches)

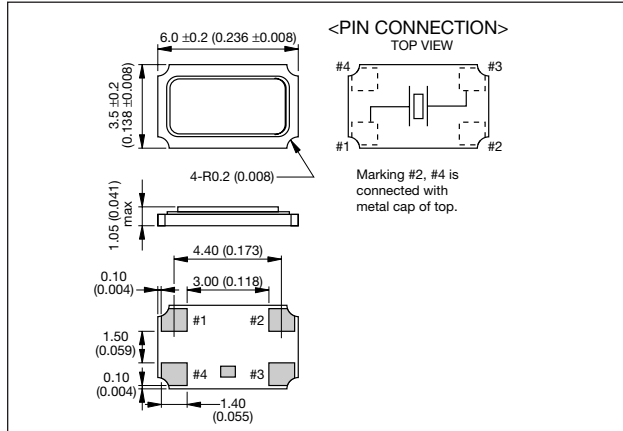


### Packaging Reel

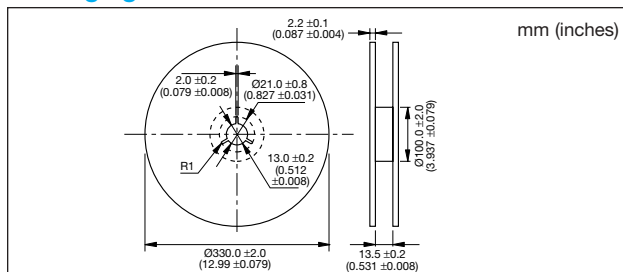


### Packaging Tape

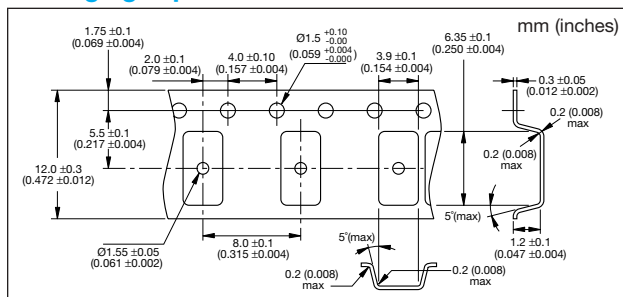

### Recommended Land Pattern

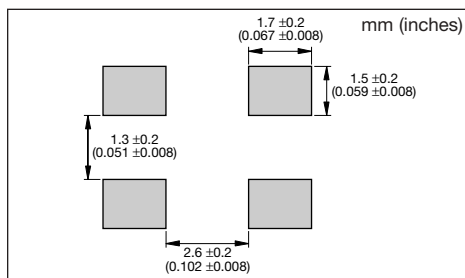

### Recommended Reflow Profile

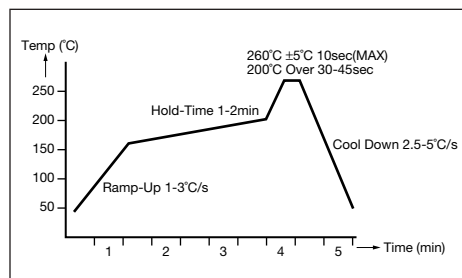

### FEATURES

- Reference frequency for telecommunication system is in product line up
- Reflow soldering available
- Using Ceramic Package of which reliability is high
- Small, low profile and market standard dimensions

### APPLICATIONS

- Mobile phone
- IC Card
- GPS

### HOW TO ORDER

| Series        | Nominal Frequency | Code     | Freq. (MHz) | Packaging  | Frequency Offset   | Frequency Stability | Operating Temperature | Frequency Stability | Load Capacitance |
|---------------|-------------------|----------|-------------|------------|--------------------|---------------------|-----------------------|---------------------|------------------|
| KSX-36-13000K | 13000K            | 13000000 | 13.000000   | R = Taping | 0 = 0Hz (Standard) | C = ±15ppm          | Q = -30°C to +85°C    | A = ±10ppm          | C = 12pF         |
| C A-Q         | 14400K            | 14400000 | 14.400000   |            |                    |                     |                       |                     |                  |
| C 0 R         | 16800K            | 16800000 | 16.800000   |            |                    |                     |                       |                     |                  |
|               | 19200K            | 19200000 | 19.200000   |            |                    |                     |                       |                     |                  |
|               | 19440K            | 19440000 | 19.440000   |            |                    |                     |                       |                     |                  |
|               | 19680K            | 19680000 | 19.680000   |            |                    |                     |                       |                     |                  |
|               | 19800K            | 19800000 | 19.800000   |            |                    |                     |                       |                     |                  |
|               | 26000K            | 26000000 | 26.000000   |            |                    |                     |                       |                     |                  |
|               | 27820K            | 27820800 | 27.820800   |            |                    |                     |                       |                     |                  |

### SPECIFICATIONS

| Parameters                | Symbol           | Specification    | Remark                         |
|---------------------------|------------------|------------------|--------------------------------|
| Nominal Frequency         | f <sub>0</sub>   | 13 to 27.8208MHz | —                              |
| Mode of Vibration         | —                | Fundamental      | Standard                       |
| Load Capacitance          | C <sub>L</sub>   | 12.0pF           | Standard                       |
| Frequency Stability       | Δf/f             | ±10.0ppm         | +25°C±2°C                      |
| Storage Temp.             | T <sub>STG</sub> | -40°C to +85°C   | —                              |
| Operating Temp.           | T <sub>OPR</sub> | -30°C to +85°C   | for Mobile Phone               |
| Frequency Temp. Stability | Δf/T             | ±15.0ppm         | for Mobile Phone               |
| Series Resistance         | C <sub>i</sub>   | 50Ω(max.)        | Different by Nominal Frequency |


# Clock Oscillators

## K30/K50 Series




Kyocera has a wide range of clock oscillators with frequency and package size to match the various customer requirements.


### K50/K30 HC SERIES TEST CIRCUIT

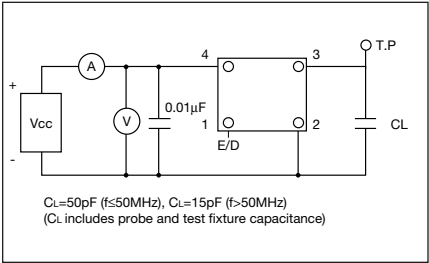


### K50/K30 3C SERIES TEST CIRCUIT

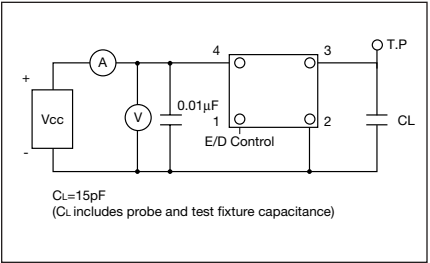

### K50H 3C SERIES TEST CIRCUIT

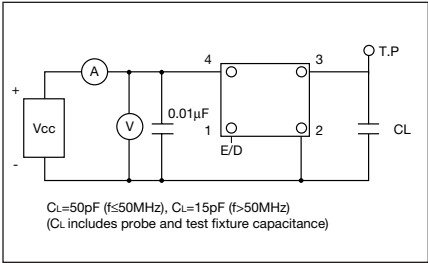

### OUTPUT WAVE FORM FOR ALL SERIES

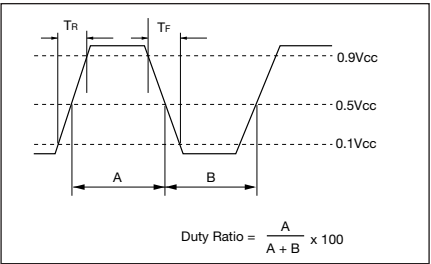

### SPECIFICATIONS

| Type    | Frequency Range (MHz) | Load                                                  | Drive Level                                    | Duty Ratio         | Features                                                                                                    |
|---------|-----------------------|-------------------------------------------------------|------------------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------|
| K50-HC  | 8 to 68               | $C_L=50\text{pF}$ (max.)<br>( $f \leq 50\text{MHz}$ ) | CMOS<br>$V_{OH}0.9V_{CC}$<br>$V_{OL}0.1V_{CC}$ | 45/55%<br>(0.5Vcc) | 1. IR Reflowable<br>2. Mini-SMD<br>3. Tristate Output, Enable/Disable Function<br>F>50MHz $C_L=15\text{pF}$ |
| K50-3C  | 8 to 80               | $C_L=15\text{pF}$ (max.)                              | CMOS<br>$V_{OH}0.9V_{CC}$<br>$V_{OL}0.1V_{CC}$ | 40/60%<br>(0.5Vcc) | 1. 3.3V Available<br>2. IR Reflowable<br>3. Mini-SMD<br>4. Tristate Output, Enable/Disable Function         |
| K50H-3C | 50 to 160             | $C_L=15\text{pF}$ (max.)                              | CMOS<br>$V_{OH}0.9V_{CC}$<br>$V_{OL}0.1V_{CC}$ | 45/55%<br>(0.5Vcc) | 1. 3.3V Available<br>2. IR Reflowable<br>3. Mini-SMD<br>4. Tristate Output, Enable/Disable Function         |
| K30-HC  | 8 to 50               | $C_L=50\text{pF}$ (max.)<br>( $f \leq 50\text{MHz}$ ) | CMOS<br>$V_{OH}0.9V_{CC}$<br>$V_{OL}0.1V_{CC}$ | 45/55%<br>(0.5Vcc) | 1. IR Reflowable<br>2. Mini-SMD<br>3. Tristate Output, Enable/Disable Function                              |
| K30-3C  | 8 to 67               | $C_L=15\text{pF}$ (max.)                              | CMOS<br>$V_{OH}0.9V_{CC}$<br>$V_{OL}0.1V_{CC}$ | 40/60%<br>(0.5Vcc) | 1. 3.3V Available<br>2. IR Reflowable<br>3. Mini-SMD<br>4. Tristate Output, Enable/Disable Function         |

# Clock Oscillators (SMD)




## K50-HC Series (5.0V)

### K50 SERIES



### DIMENSIONS

millimeters (inches)

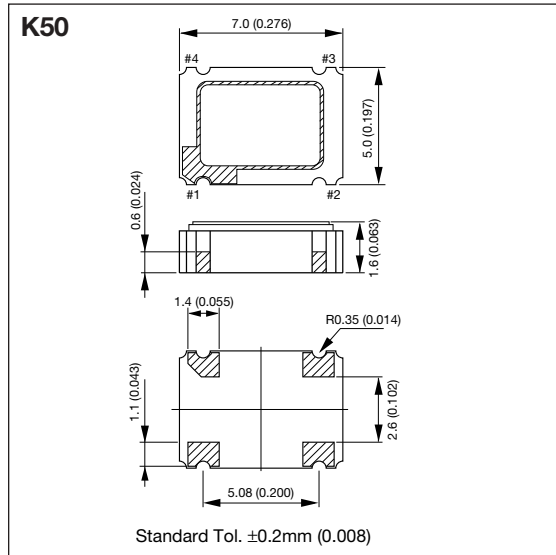

### PIN CONNECTION

| Pin # | Function         |
|-------|------------------|
| 1     | CONTROL          |
| 2     | CASE GND         |
| 3     | OUTPUT           |
| 4     | +V <sub>CC</sub> |

### ENABLE/DISABLE

| Pin #1      | Pin #3         |
|-------------|----------------|
| "H" or Open | Oscillation    |
| "L"         | High Impedance |

### SPECIFICATIONS

| Items                 | Code                            | Rating                   | Unit  | Remarks                                |
|-----------------------|---------------------------------|--------------------------|-------|----------------------------------------|
| Output Frequency      | F <sub>OUT</sub>                | 8 to 68                  | MHz   | —                                      |
| Frequency Tolerance   | $\Delta F/F$                    | $\pm 100$ , $\pm 50$     | ppm   | Over all conditions                    |
| Aging                 | $\Delta F/F$                    | $\pm 5$                  | ppm/y | @ 25°C                                 |
| Operating Temperature | T <sub>OPR</sub>                | -10 to 70                | °C    | —                                      |
| Storage Temperature   | T <sub>STR</sub>                | -55 to 125               | °C    | —                                      |
| Supply Voltage        | V <sub>CC</sub>                 | 5 $\pm 0.5$              | V     | —                                      |
| Supply Current        | I <sub>CC</sub>                 | 50 max.                  | mA    | Loaded @ 68MHz                         |
| Disable Current       | I <sub>DE</sub>                 | 30 max.                  | mA    | —                                      |
| Duty Ratio            | SYM                             | 45 to 55                 | %     | 0.5V <sub>CC</sub> DC Level            |
| Output 0 Level        | V <sub>OL</sub>                 | 0.1 V <sub>CC</sub> max. | V     | I <sub>OL</sub> = 16mA                 |
| Output 1 Level        | V <sub>OH</sub>                 | 0.9 V <sub>CC</sub> min. | V     | I <sub>OH</sub> = -16mA                |
| Rise/Fall Time        | T <sub>R</sub> , T <sub>F</sub> | 10 max.                  | nsec  | 0.1V <sub>CC</sub> -0.9V <sub>CC</sub> |
| Load Capacitance      | C <sub>L</sub>                  | 50 max.                  | pF    | F > 50MHz C <sub>L</sub> = 15pF (max.) |
| Enable/Disable Time   | —                               | 100 max.                 | nsec  | —                                      |
| Input Voltage Low     | V <sub>IL</sub>                 | 0.8 max.                 | V     | —                                      |
| Input Voltage High    | V <sub>IH</sub>                 | 2.2 min.                 | V     | —                                      |
| Start-up Time         | ST                              | 10 max.                  | mS    | Minimum Operating Voltage to be 0sec   |

\*Please contact us for inquiries about Extend Operating Temperature Range (-40 to +85°C), available frequencies, other condition.

### FEATURES

- High reliable SMD ceramic package
- Frequency range = 8MHz to 68MHz
- Frequency tolerance =  $\pm 100\text{ppm}$ ,  $\pm 50\text{ppm}$
- Tristate output inhibit

### APPLICATIONS

- Routers
- Switches
- Servers

### HOW TO ORDER

**K50 - HC 1 C S E 40.0000M R**

**Series**

**Tolerance**  
1 =  $\pm 100\text{ppm}$   
0 =  $\pm 50\text{ppm}$

**Packaging**

R = Tape and reel,  
1,000 pcs/reel

**Frequency (MHz)**

|          |         |         |
|----------|---------|---------|
| 8.0000   | 27.0000 | 49.1520 |
| 14.31818 | 29.4989 | 50.0000 |
| 16.0000  | 30.0000 | 60.0000 |
| 20.0000  | 32.0000 | 64.0000 |
| 24.0000  | 33.8688 | 66.6667 |
| 24.5760  | 40.0000 | —       |
| 25.0000  | 48.0000 | —       |

**Tristate Output**

E = with function (STD)

**Duty Ratio**

S = 45% to 55% (STD)

**Output**

C = CMOS/Compatibility



# Clock Oscillators (SMD)




## K50H-3C Series (3.3V)

### K50 SERIES



### DIMENSIONS

millimeters (inches)

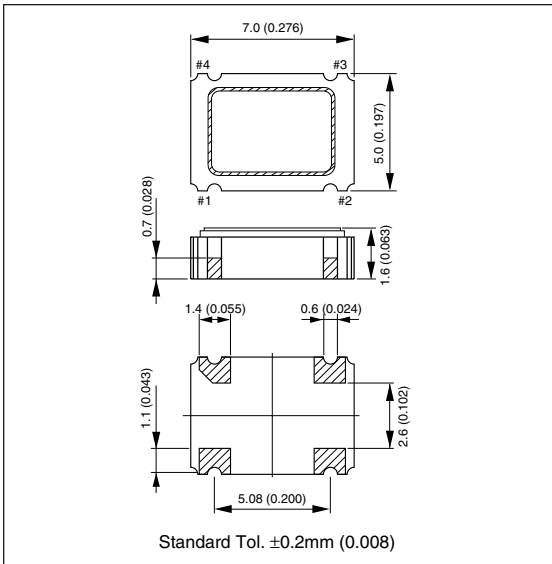

### PIN CONNECTION

| Pin # | Function         |
|-------|------------------|
| 1     | CONTROL          |
| 2     | CASE GND         |
| 3     | OUTPUT           |
| 4     | +V <sub>CC</sub> |

### ENABLE/DISABLE

| Pin #1      | Pin #3                             |
|-------------|------------------------------------|
| "H" or Open | Oscillation                        |
| "L"         | High Impedance or Oscillation Stop |

### FEATURES

- Special design package for high frequency applications
- Frequency range = 50MHz to 160MHz
- Frequency tolerance =  $\pm 100\text{ppm}$ ,  $\pm 50\text{ppm}$ ,  $\pm 25\text{ppm}$
- Tristate output inhibit
- Low jitter

### APPLICATIONS

- Fibre channel
- 10 Gigabit Ethernet
- Networking Devices

### HOW TO ORDER

**K50H - 3C 1 S E 125.000M R**

#### Packaging

R = Tape and reel,  
1,000 pcs/reel

#### Frequency (MHz)

|         |         |         |
|---------|---------|---------|
| 50.0000 | 100.000 | 106.250 |
| 125.000 | 133.333 | 155.520 |
| 156.250 | —       | —       |

#### Enable/Disable Function

E = with function (STD)

#### Duty Ratio

S = 45% to 55% (STD)

#### Tolerance

1 =  $\pm 100\text{ppm}$   
0 =  $\pm 50\text{ppm}$   
S =  $\pm 30\text{ppm}$   
U =  $\pm 25\text{ppm}$

#### Series

### SPECIFICATIONS

| Items                 | Code                            | Rating                                     | Unit  | Remarks                                |
|-----------------------|---------------------------------|--------------------------------------------|-------|----------------------------------------|
| Output Frequency      | F <sub>OUT</sub>                | 50 to 160                                  | MHz   | —                                      |
| Frequency Tolerance   | $\Delta F/F$                    | $\pm 100$ , $\pm 50$ , $\pm 30$ , $\pm 25$ | ppm   | Over all conditions                    |
| Aging                 | $\Delta F/F$                    | $\pm 5.0$ , $\pm 1.5$                      | ppm/y | @ 25°C                                 |
| Operating Temperature | T <sub>OPR</sub>                | -10 to 70                                  | °C    | —                                      |
| Storage Temperature   | T <sub>STR</sub>                | -55 to 125                                 | °C    | —                                      |
| Supply Voltage        | V <sub>CC</sub>                 | 3.3 $\pm$ 0.3                              | V     | —                                      |
| Supply Current        | I <sub>CC</sub>                 | 60 max.                                    | mA    | Loaded @ 160MHz                        |
| Duty Ratio            | SYM                             | 45 to 55                                   | %     | 0.5V <sub>CC</sub> DC Level            |
| Output 0 Level        | V <sub>OL</sub>                 | 0.1V <sub>CC</sub> max.                    | V     | I <sub>OL</sub> = 8mA                  |
| Output 1 Level        | V <sub>OH</sub>                 | 0.9V <sub>CC</sub> min.                    | V     | I <sub>OH</sub> = -8mA                 |
| Rise/Fall Time        | T <sub>R</sub> , T <sub>F</sub> | 10 max.                                    | nsec  | 0.1V <sub>CC</sub> -0.9V <sub>CC</sub> |
| Load Capacitance      | C <sub>L</sub>                  | 15 max.                                    | pF    | —                                      |
| Enable Time           | —                               | 10 max.                                    | msec  | —                                      |
| Disable Time          | —                               | 10 max.                                    | msec  | —                                      |
| Input Voltage Low     | V <sub>IL</sub>                 | 0.3V <sub>CC</sub> max.                    | V     | —                                      |
| Input Voltage High    | V <sub>IH</sub>                 | 0.7V <sub>CC</sub> min.                    | V     | —                                      |


\*Please contact us for inquiries about Extend Operating Temperature Range (-40 to +85°C), available frequencies, other condition.



## RECOMMENDED LAND PATTERN



**millimeters (inches)**



## Carrier Tape



1,000pcs/Reel

# Clock Oscillators (SMD)




## K30-HC Series (5.0V)

### K30 SERIES



### DIMENSIONS

millimeters (inches)

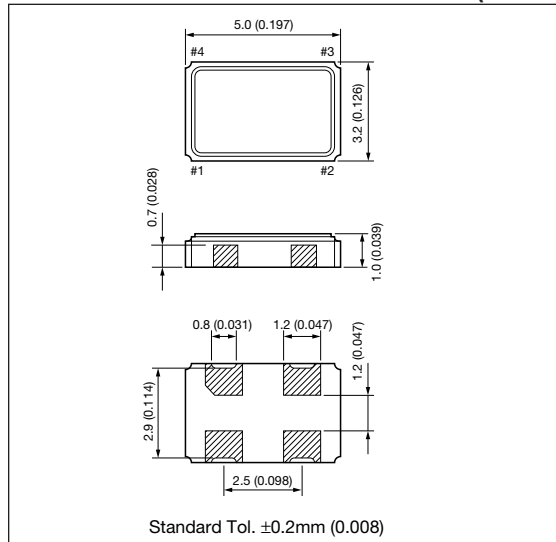

### PIN CONNECTION

| Pin # | Function         |
|-------|------------------|
| 1     | CONTROL          |
| 2     | CASE GND         |
| 3     | OUTPUT           |
| 4     | +V <sub>CC</sub> |

### ENABLE/DISABLE

| Pin #1      | Pin #3         |
|-------------|----------------|
| "H" or Open | Oscillation    |
| "L"         | High Impedance |

### FEATURES

- High reliable miniature SMD ceramic package
- Frequency range = 8MHz to 50MHz
- Frequency tolerance =  $\pm 100$ ppm,  $\pm 50$ ppm
- Tristate output inhibit

### APPLICATIONS

- PDAs
- Portable electronics

### HOW TO ORDER

K30 - HC 1 C S E 25.0000M R

#### Packaging

R = Tape and reel,  
1,000 pcs/reel

#### Frequency (MHz)

|          |          |         |
|----------|----------|---------|
| 14.31818 | 24.5760  | 30.0000 |
| 16.0000  | 25.0000  | 32.0000 |
| 17.7345  | 27.0000  | 33.8688 |
| 20.0000  | 28.37516 | 48.0000 |
| 24.0000  | 28.63636 | —       |

#### Enable/Disable Function

E = with function (STD)

#### Duty Ratio

S = 45% to 55% (STD)

#### Output

C = CMOS/Compatibility

#### Tolerance

1 =  $\pm 100$ ppm  
0 =  $\pm 50$ ppm

#### Series

### SPECIFICATIONS

| Items                 | Code                            | Rating                  | Unit  | Remarks                                |
|-----------------------|---------------------------------|-------------------------|-------|----------------------------------------|
| Output Frequency      | F <sub>OUT</sub>                | 8 to 50                 | MHz   | —                                      |
| Frequency Tolerance   | $\Delta F/F$                    | $\pm 100$ , $\pm 50$    | ppm   | Over all conditions                    |
| Aging                 | $\Delta F/F$                    | $\pm 5$                 | ppm/y | @ 25°C                                 |
| Operating Temperature | T <sub>OPR</sub>                | -10 to 70               | °C    | —                                      |
| Storage Temperature   | T <sub>STR</sub>                | -55 to 125              | °C    | —                                      |
| Supply Voltage        | V <sub>CC</sub>                 | 5 $\pm$ 0.5             | V     | —                                      |
| Supply Current        | I <sub>CC</sub>                 | 50 max.                 | mA    | Loaded @ 50MHz                         |
| Disable Current       | I <sub>DE</sub>                 | 30 max.                 | mA    | —                                      |
| Duty Ratio            | SYM                             | 45 to 55                | %     | 0.5V <sub>CC</sub> DC Level            |
| Output 0 Level        | V <sub>OL</sub>                 | 0.1V <sub>CC</sub> max. | V     | I <sub>OL</sub> = 16mA                 |
| Output 1 Level        | V <sub>OH</sub>                 | 0.9V <sub>CC</sub> min. | V     | I <sub>OH</sub> = -16mA                |
| Rise/Fall Time        | T <sub>R</sub> , T <sub>F</sub> | 10 max.                 | nsec  | 0.1V <sub>CC</sub> -0.9V <sub>CC</sub> |
| Load Capacitance      | C <sub>L</sub>                  | 50 max.                 | pF    | —                                      |
| Enable/Disable Time   | —                               | 100 max.                | nsec  | —                                      |
| Input Voltage Low     | V <sub>IL</sub>                 | 0.8 max.                | V     | —                                      |
| Input Voltage High    | V <sub>IH</sub>                 | 2.2 min.                | V     | —                                      |
| Start-up Time         | ST                              | 10 max.                 | mS    | Minimum Operating Voltage to be 0sec   |

\*Please contact us for inquiries about Extend Operating Temperature Range (-40 to +85°C), available frequencies, other condition.





# Clock Oscillators (SMD)




## K30-3C Tight Tolerance Series (3.3V)

### K30 SERIES



### DIMENSIONS

millimeters (inches)

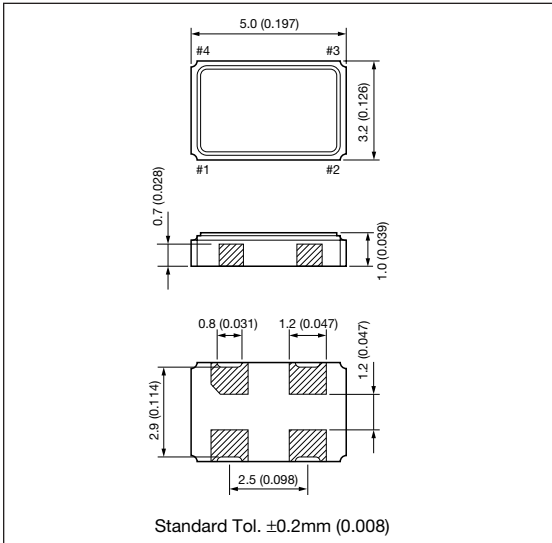

### PIN CONNECTION

| Pin # | Function         |
|-------|------------------|
| 1     | CONTROL          |
| 2     | CASE GND         |
| 3     | OUTPUT           |
| 4     | +V <sub>CC</sub> |

### ENABLE/DISABLE

| Pin #1      | Pin #3                             |
|-------------|------------------------------------|
| "H" or Open | Oscillation                        |
| "L"         | High Impedance or Oscillation Stop |

### SPECIFICATIONS

| Items                 | Code                            | Rating                  | Unit  | Remarks                                |
|-----------------------|---------------------------------|-------------------------|-------|----------------------------------------|
| Output Frequency      | F <sub>OUT</sub>                | 8 to 67                 | MHz   | —                                      |
| Frequency Tolerance   | ΔF/F                            | ±25                     | ppm   | Over all conditions                    |
| Aging                 | ΔF/F                            | ±3                      | ppm/y | @ 25°C                                 |
| Operating Temperature | T <sub>OPR</sub>                | -10 to 70               | °C    | —                                      |
| Storage Temperature   | T <sub>STR</sub>                | -55 to 125              | °C    | —                                      |
| Supply Voltage        | V <sub>CC</sub>                 | 3.3±0.16                | V     | —                                      |
| Supply Current        | I <sub>CC</sub>                 | 25 max.                 | mA    | Loaded @ 67 MHz                        |
| Stand by Current      | I <sub>ST</sub>                 | 10 max.                 | μA    | —                                      |
| Duty Ratio            | SYM                             | 40 to 60, 45 to 55      | %     | 0.5V <sub>CC</sub> DC Level            |
| Output 0 Level        | V <sub>OL</sub>                 | 0.1V <sub>CC</sub> max. | V     | I <sub>OL</sub> = 8mA                  |
| Output 1 Level        | V <sub>OH</sub>                 | 0.9V <sub>CC</sub> min. | V     | I <sub>OH</sub> = -8mA                 |
| Rise/Fall Time        | T <sub>R</sub> , T <sub>F</sub> | 10 max.                 | nsec  | 0.1V <sub>CC</sub> -0.9V <sub>CC</sub> |
| Load Capacitance      | C <sub>L</sub>                  | 15 max.                 | pF    | —                                      |
| Enable/Disable Time   | —                               | 5 max.                  | msec  | —                                      |
| Input Voltage Low     | V <sub>IL</sub>                 | 0.3V <sub>CC</sub> max. | V     | —                                      |
| Input Voltage High    | V <sub>IH</sub>                 | 0.7V <sub>CC</sub> min. | V     | —                                      |
| Start-up Time         | ST                              | 10 max.                 | mS    | Minimum Operating Voltage to be 0sec   |

\*Please contact us for inquires about Supply Voltage, other condition.

### FEATURES

- High reliable miniature SMD ceramic package
- Excellent frequency precision
- Tristate output inhibit
- Low current consumption

### APPLICATIONS

- IEEE 802.11
- Wireless LAN

### HOW TO ORDER

K30 - 3C U ☐ E 44.0000M R

#### Packaging

R = Tape and reel,  
1,000 pcs/reel

#### Frequency (MHz)

|         |          |         |
|---------|----------|---------|
| 13.0000 | 28.37516 | 44.0000 |
| 26.0000 | 28.63636 | —       |
| 27.0000 | 32.0000  | —       |

#### Enable/Disable Function

E = with function (STD)

#### Duty Ratio

☐ = 40% to 60% (STD)  
S = 45% to 55%  
(f>20MHz)

#### Tolerance

U = ±25ppm


#### Series

# Clock Oscillators (SMD)




## K30 Series

### RECOMMENDED LAND PATTERN

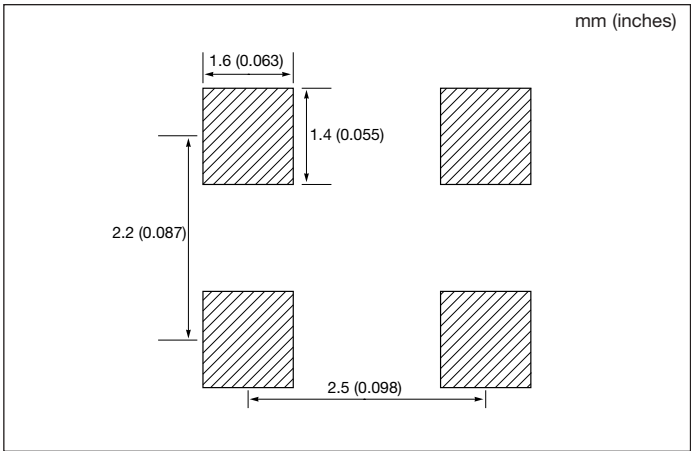


### RECOMMENDED REFLOW PROFILE (Lead Free)

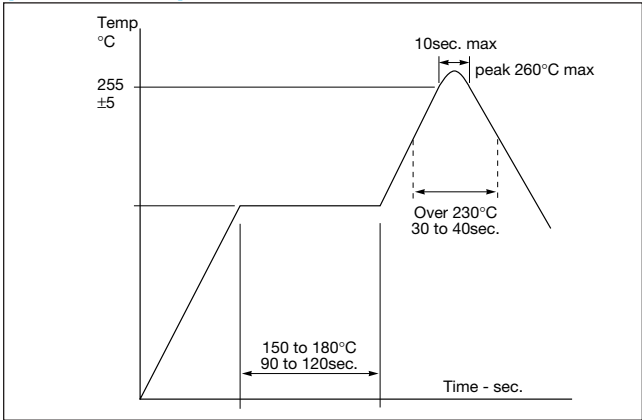


### PACKAGING

millimeters (inches)


#### Reel

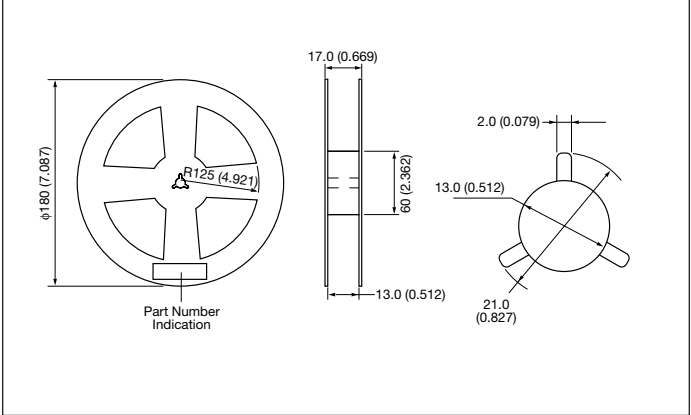

### MARKING SPECIFICATIONS

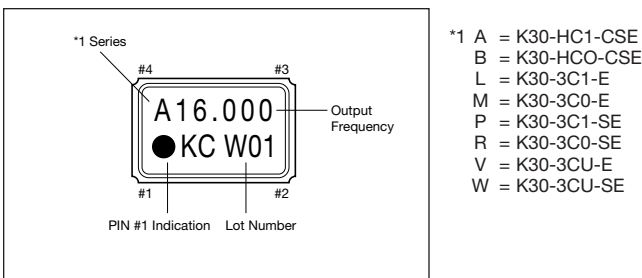

#### Carrier Tape

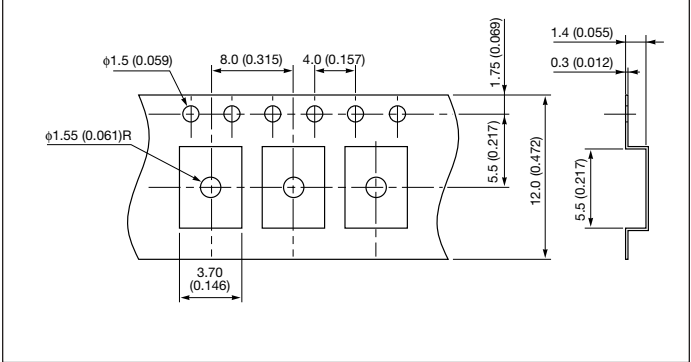


### PACKAGING

1,000 pcs/Reel

# Voltage Controlled Oscillators




## YKS1 Series

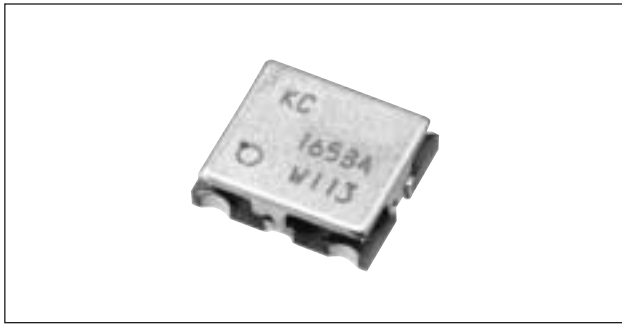

### FEATURES


- Small and low profile
- Frequency 700MHz to 2.5GHz available
- Application for UMTS, AMPS(CDMA), PCS, PDC, PHS

### HOW TO ORDER

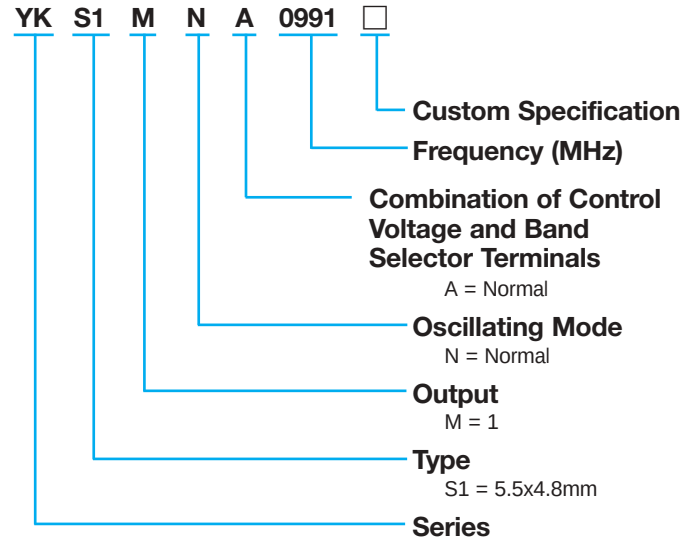

### DIMENSIONS

millimeters (inches)

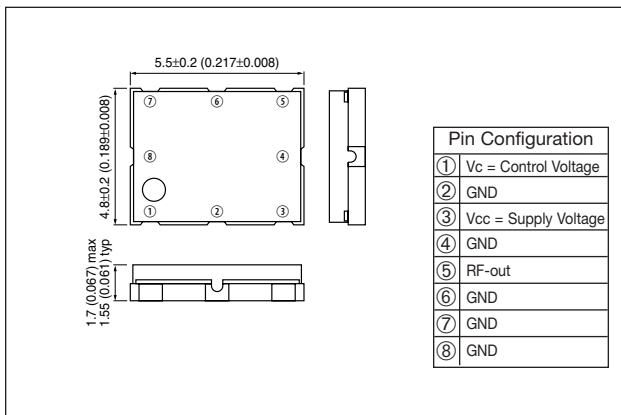


### SPECIFICATIONS


| Part Number  | System     | Function | Frequency MHz    | Vcc (V)         | Icc (mA)   | Po (dBm)     | f <sub>ru</sub> (MHz/V) | C/N (dBC/Hz)                          |
|--------------|------------|----------|------------------|-----------------|------------|--------------|-------------------------|---------------------------------------|
| YKS1MNA0991* | AMPS(CDMA) | RF       | 978 to 1004      | 2.45 $\pm$ 0.10 | $\leq$ 8.0 | -1.5 $\pm$ 3 | 27 $\pm$ 4              | $\geq$ 117@60kHz<br>$\geq$ 140@900kHz |
| YKS1MNA2070* | PCS        | RF       | 2039 to 2100     | 2.45 $\pm$ 0.10 | $\leq$ 9.5 | -1.5 $\pm$ 3 | 60 $\pm$ 10             | $\geq$ 137@1.25MHz                    |
| YKS1MNA1668* | PHS        | RF       | 1649.5 to 1686.5 | 2.80 $\pm$ 0.40 | $\leq$ 6.0 | $\geq$ -7    | 45 $\pm$ 7              | $\geq$ 125@600kHz                     |

Vcc: Power supply Icc: Current consumption Po: Output level f<sub>ru</sub>: Tuning voltage sensitivity Top: Operating temperature range

### RECOMMENDED LAND PATTERN

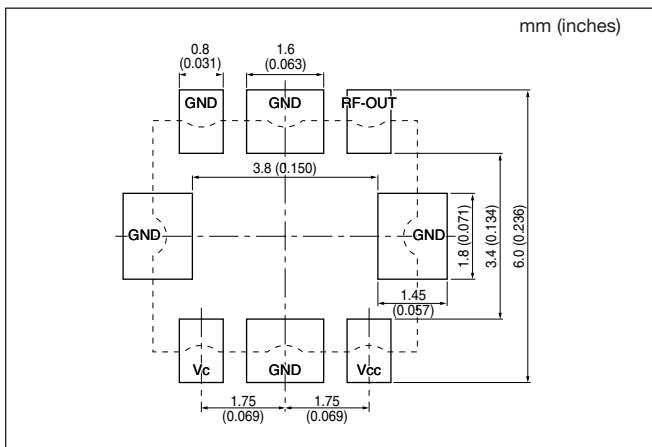

### RECOMMENDED REFLOW PROFILE

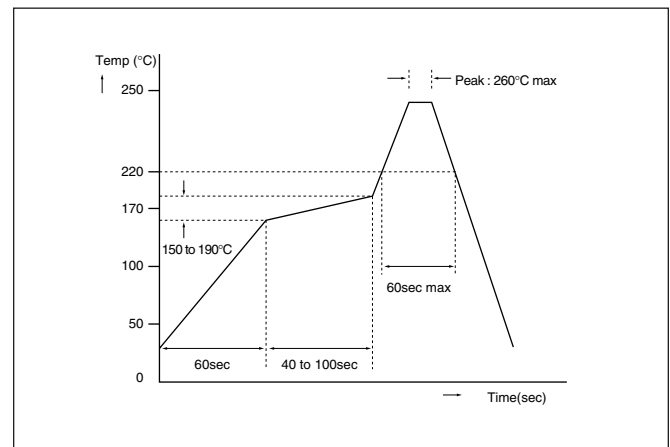

# Voltage Controlled Oscillators




## YK509 Series



### DIMENSIONS

millimeters (inches)

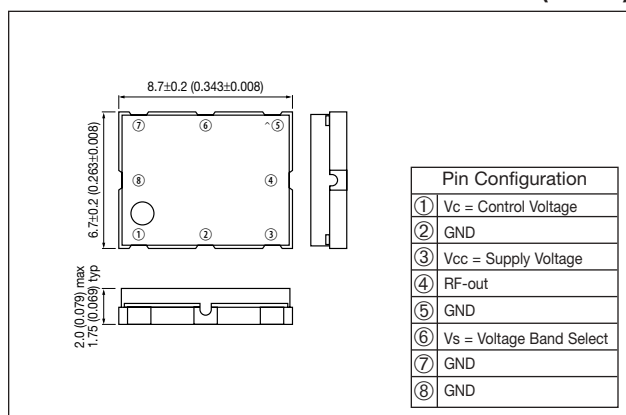

### FEATURES

- For Dualband Offset Solution
- Dual high power signal output
- Small Size (8.7x6.7mm)

### HOW TO ORDER

YK 509 M D B 1390M2139 A

Custom Specification

Frequency (MHz)

Frequency Band 1

Frequency Band 2

Combination of Control Voltage and Band Selector and Power Save Terminals

|   | Vc | Band Select | Power Save | Vc | Band Select | Power Save |
|---|----|-------------|------------|----|-------------|------------|
| A | 1  | 0           | –          | E  | 2           | 2          |
| B | 1  | 1           | –          | F  | 1           | 1          |
| C | 1  | 2           | –          | G  | 1           | 1          |
| D | 2  | 1           | –          | H  | 1           | 2          |

Oscillating Mode

S = Shift W = Doubler

N = Normal D = 2 Resonator

Output

M = 1 D = 2

Type


509 = 8.7x6.7mm

Series


### SPECIFICATIONS

| Part Number        | System   | Function | Frequency MHz | Vcc (V)   | Icc (mA) | Po (dBm) | f <sub>tu</sub> (MHz/V) | C/N (dBC/Hz)              |
|--------------------|----------|----------|---------------|-----------|----------|----------|-------------------------|---------------------------|
| YK509MDB1390M2139* | GPS      | RF       | 1385 to 1396  | 2.80±0.10 | ≤15      | 0 typ    | 14±3                    | ≥90@10kHz<br>≥139@1.25MHz |
|                    | AMPS/PCS | RF       | 2104 to 2174  | 2.80±0.10 | ≤15      | 0 typ    | 50±10                   | ≥112@60kHz<br>≥118@120kHz |

### RECOMMENDED LAND PATTERN

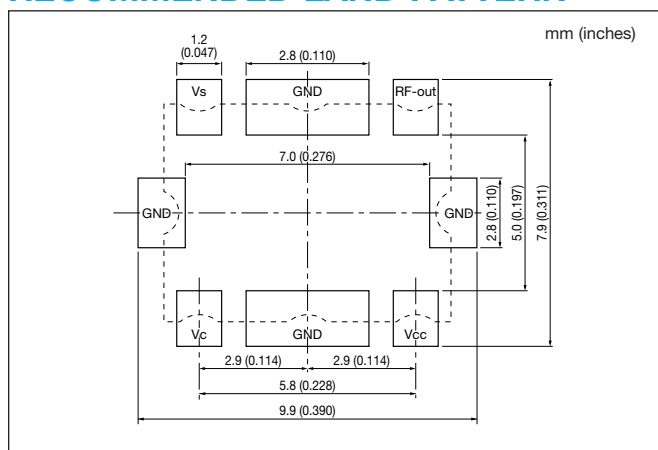


### RECOMMENDED REFLOW PROFILE

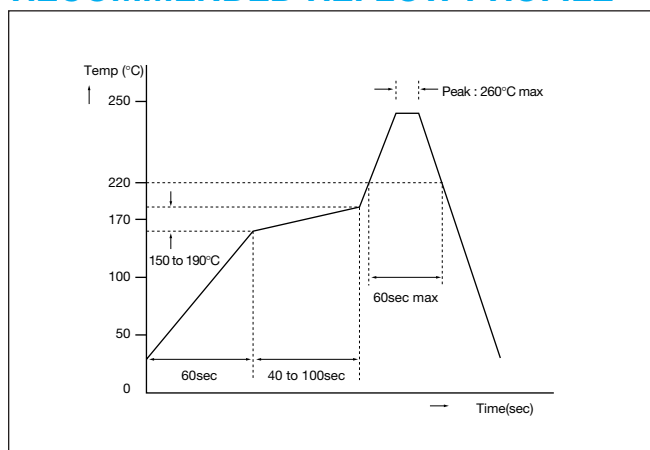

# Voltage Controlled Oscillators




## YK511 Series

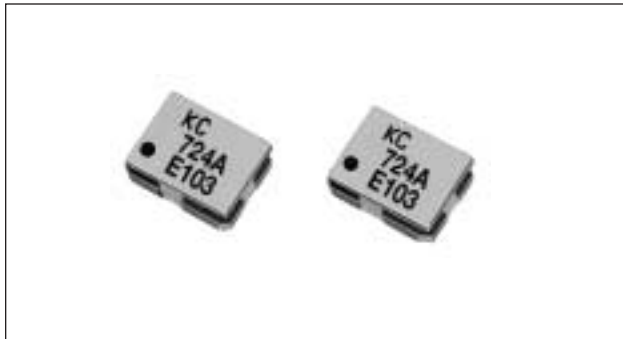

### DIMENSIONS


millimeters (inches)

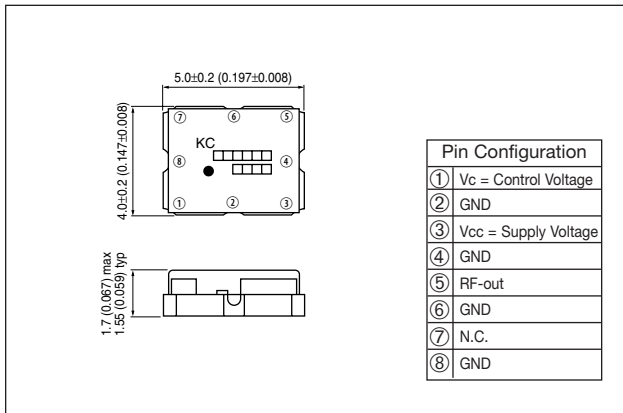

### FEATURES

- Small and low profile
- Frequency 700MHz to 2GHz available
- Application for PDC CDMA

### HOW TO ORDER

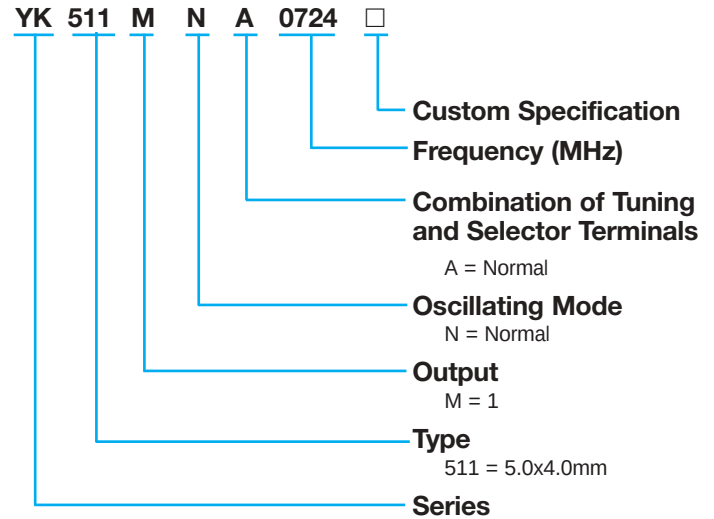


### SPECIFICATIONS


| Part Number   | System   | Function | Frequency MHz  | V <sub>cc</sub> (V) | I <sub>cc</sub> (mA) | P <sub>o</sub> (dBm) | f <sub>TU</sub> (MHz/V) | C/N (dBC/Hz)               |
|---------------|----------|----------|----------------|---------------------|----------------------|----------------------|-------------------------|----------------------------|
| YK511MNA0724* | PDC800   | RF       | 680 to 766.4   | 2.80±0.10           | ≤4.0                 | ≥-8                  | 61±9                    | ≥104@25kHz                 |
| YK511MNA0741* | CDMA-ONE | RF       | 721.5 to 760.5 | 2.70±0.10           | ≤6.0                 | ≥-4                  | 34±4                    | ≥107@25kHz<br>≥119@100kHz  |
| YK511MNA0760* | W-CDMA   | IF       | 760            | 2.70±0.10           | ≤5.0                 | -7±3                 | 19.5±3                  | ≥118@200kHz<br>≥142@5.0MHz |
| YK511MNA2330* | W-CDMA   | RF       | 2270 to 2390   | 2.70±0.10           | ≤8.0                 | ≥-5                  | 82±12                   | ≥109@200kHz<br>≥136@5.0MHz |

V<sub>cc</sub>: Power supply I<sub>cc</sub>: Current consumption P<sub>o</sub>: Output level f<sub>TU</sub>: Tuning voltage sensitivity Top: Operating temperature range

### RECOMMENDED LAND PATTERN

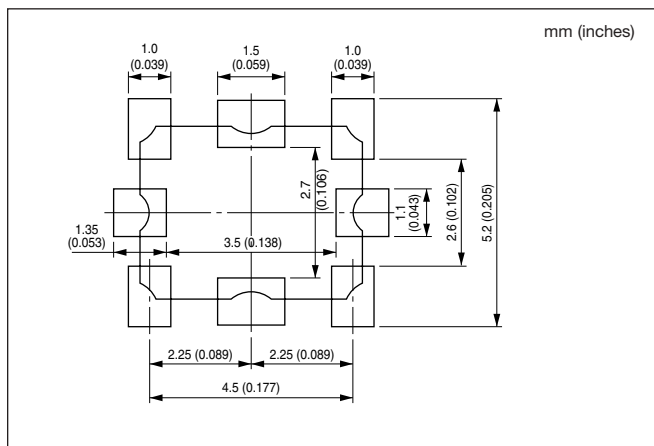


### RECOMMENDED REFLOW PROFILE

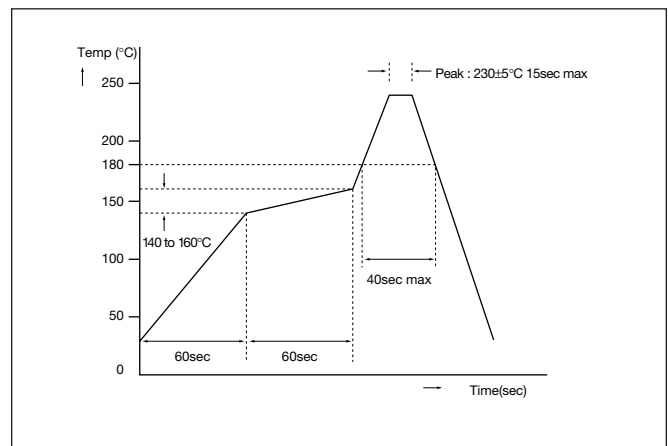

# Voltage Controlled Oscillators




## YK512 Series

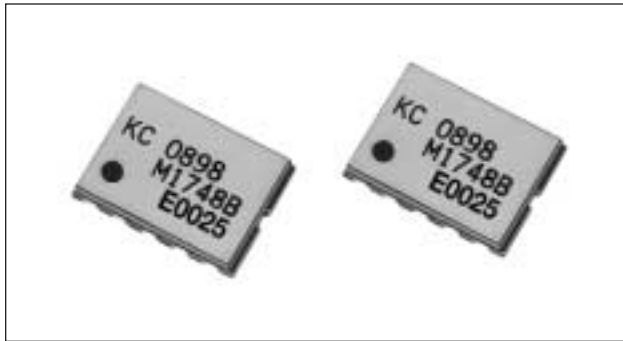

### DIMENSIONS

millimeters (inches)

#### YK512 DD



| P/N | DDC  | DDF  |
|-----|------|------|
| ①   | Vcc2 | GND  |
| ②   | GND  | GND  |
| ③   | Vc   | Vc   |
| ④   | GND  | Ps   |
| ⑤   | Vcc1 | Vcc  |
| ⑥   | GND  | GND  |
| ⑦   | OUT1 | OUT1 |
| ⑧   | Vs1  | Vs   |
| ⑨   | GND  | GND  |
| ⑩   | Vs2  | GND  |
| ⑪   | OUT  | OUT2 |
| ⑫   | GND  | GND  |

Vcc = Supply Voltage  
Vc = Control Voltage  
Vs = Band Select  
Ps = Power Save

### FEATURES

- Small and low profile (1.7mm max.)
- Dual high power signal output
- For Dualband Offset Solution

### HOW TO ORDER

YK 512 D D C 0898M1748 A

Custom Specification

Frequency (MHz)

Frequency Band 1  
Frequency Band 2

Combination of Control  
Voltage and Band Selector  
and Power Save Terminals

|   | Vc | Band Select | Power Save | Vc | Band Select | Power Save |
|---|----|-------------|------------|----|-------------|------------|
| A | 1  | 0           | -          | E  | 2           | 2          |
| B | 1  | 1           | -          | F  | 1           | 1          |
| C | 1  | 2           | -          | G  | 1           | 1          |
| D | 2  | 1           | -          | H  | 1           | 2          |

Oscillating Mode

S = Shift W = Doubler  
N = Normal D = 2 Resonator

Output

M = 1 D = 2

Type


512 = 9.6x7.0mm

Series


### SPECIFICATIONS

| Part Number        | System | Function | Frequency MHz | Vcc (V)   | Icc (mA) | Po (dBm) | f <sub>TU</sub> (MHz/V) | C/N (dBC/Hz)               |
|--------------------|--------|----------|---------------|-----------|----------|----------|-------------------------|----------------------------|
| YK512DDC0898M1748* | GSM    | Tx       | 880 to 915    | 2.75±0.10 | ≤27      | 9.5 typ  | 52±8                    | ≥117@100kHz<br>≥164@ 20MHz |
|                    | DCS    | Tx       | 1710 to 1785  | 2.75±0.10 | ≤35      | 9.5 typ  | 90±12                   | ≥110@100kHz<br>≥156@ 20MHz |
| YK512DDF0898M1748* | GSM    | Tx       | 880 to 915    | 2.80±0.10 | ≤30      | 9.0 typ  | 33±5                    | ≥120@100kHz<br>≥162@ 20MHz |
|                    | DCS    | Tx       | 1710 to 1785  | 2.80±0.10 | ≤30      | 9.0 typ  | 66±10                   | ≥110@100kHz<br>≥154@ 20MHz |

### RECOMMENDED LAND PATTERN

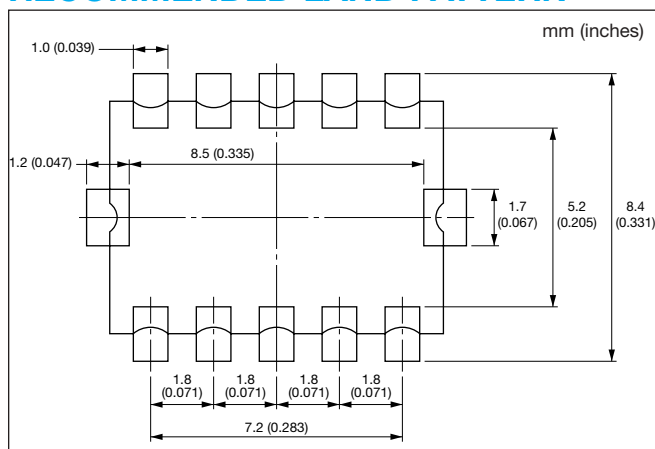

### RECOMMENDED REFLOW PROFILE

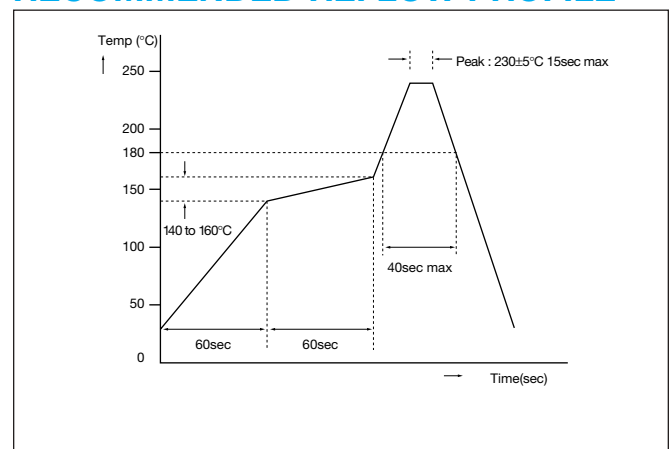


# Voltage Controlled Oscillators

## Packaging YK Series



### PACKAGING

#### Reel

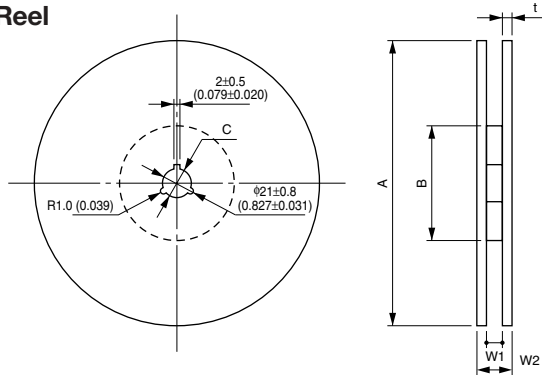


#### Dimensions

mm (inches)

|       | A                              | B                              | C               | W1              | W2              |
|-------|--------------------------------|--------------------------------|-----------------|-----------------|-----------------|
| YK511 |                                |                                |                 | 13.5<br>(0.531) | 18.5<br>(0.728) |
| YKS1  | $\phi 330$<br>( $\phi 13.00$ ) | $\phi 100$<br>( $\phi 3.937$ ) | 13.0<br>(0.512) |                 |                 |
| YK509 |                                |                                |                 | 17.5<br>(0.689) | 22.4<br>(0.882) |
| YK512 |                                |                                |                 |                 |                 |

#### Tape

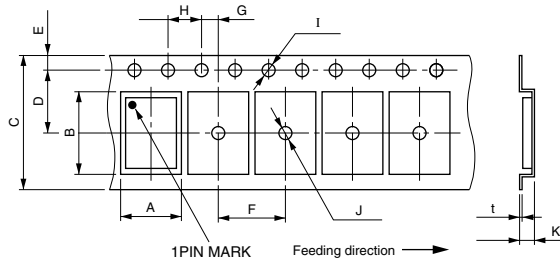

#### Dimensions

mm (inches)

|       | A               | B               | C               | D               | E               | F               | G               | H               | I                               | J                               | K               | t               |
|-------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|---------------------------------|---------------------------------|-----------------|-----------------|
| YK511 | 4.40<br>(0.173) | 5.40<br>(0.213) | 12.0<br>(0.472) | 5.50<br>(0.217) |                 | 8.00<br>(0.315) |                 |                 |                                 |                                 | 1.80<br>(0.071) |                 |
| YKS1  | 5.30<br>(0.209) | 6.00<br>(0.236) |                 |                 | 1.75<br>(0.069) |                 | 2.00<br>(0.079) | 4.00<br>(0.157) | $\phi 1.55$<br>( $\phi 0.061$ ) | $\phi 1.55$<br>( $\phi 0.061$ ) | 2.20<br>(0.087) | 0.30<br>(0.012) |
| YK509 | 7.30<br>(0.287) | 9.30<br>(0.366) | 16.0<br>(0.630) | 7.50<br>(0.295) |                 | 12.0<br>(0.472) |                 |                 |                                 |                                 |                 |                 |
| YK512 | 7.25<br>(0.285) | 9.85<br>(0.388) |                 |                 |                 |                 |                 |                 |                                 |                                 | 1.80<br>(0.071) |                 |

### PACKAGING


| Part Number | Packaging Quantity<br>(pcs/reel) |
|-------------|----------------------------------|
| YK511       | 3,000                            |
| YKS1        |                                  |
| YK509       | 2,000                            |
| YK512       |                                  |

# Temperature Compensated Crystal Oscillators KT14 Series




## DIMENSIONS

millimeters (inches)

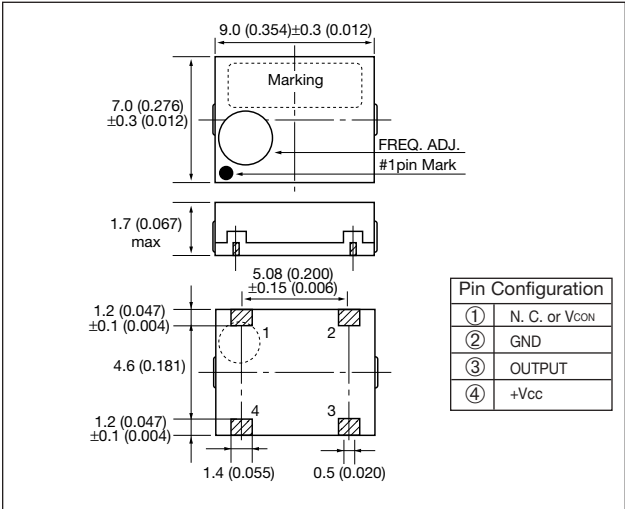

## TEST CIRCUIT

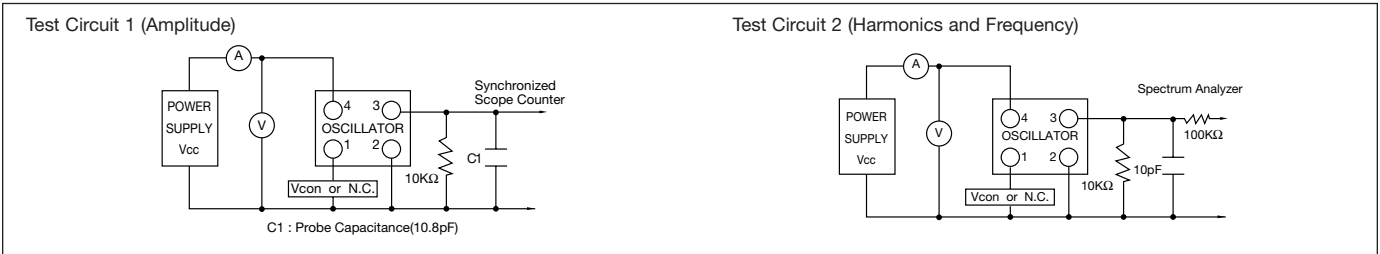

## SPECIFICATIONS

| Specifications        |       |           |                      |          |                               |
|-----------------------|-------|-----------|----------------------|----------|-------------------------------|
| Items                 | Code  | PHS       | Cellular             | Unit     | Remarks                       |
| Supply Voltage        | Vcc   | 2.8±5%    | 2.8±5%               | V        | —                             |
|                       |       |           | 3.0±5%               |          |                               |
|                       |       |           | 3.3±5%               |          |                               |
| Output Frequency      | fo    | 19.200    | 12.800 13.000 14.000 | MHz      | —                             |
|                       |       |           | 14.850 16.800        |          |                               |
|                       |       |           | 19.200 19.440        |          |                               |
|                       |       |           | 19.680 19.800        |          |                               |
|                       |       |           |                      |          |                               |
| Operating Temperature | Topr  | -10 to 60 | -30 to +80           | °C       | —                             |
| Storage Temperature   | Tstr  | -20 to 70 | -40 to 85            | °C       | —                             |
| Frequency Stability   | Δf/fo | ±2.5 max. | ±2.0 max.            | ppm      | vs temperature (after reflow) |
|                       |       |           | ±2.5 max.            |          |                               |
|                       |       |           | ±0.2 max.            |          |                               |
|                       |       |           | ±0.3 max.            |          |                               |
| Aging Rate            | Aging |           | ±1.0 max.            | ppm/year | 1 year                        |
| Output Voltage        | Vout  | 0.8 min.  |                      | Vp-p     | load 10kΩ/10pF                |
| Supply Current        | Icc   | 2.0 max.  |                      | mA       | no load                       |
| Trimmer Control Range | Δf/C  | ±3.0 min. | —                    | ppm      | —                             |
| Voltage Control Range | Δf/V  | —         | ex: ±4.0 to ±8.0     | ppm      | 1.5V±1V, 2.5V±1V              |
| Harmonics             | —     |           | -3.0 max.            | dBc      | —                             |

## FEATURES

- Low profile SMD type (9.0x7.0x1.7mm)
- AFC function available
- Frequency adjustment free after reflow soldering process
- 2.8, 3.0, 3.3V drive available

## APPLICATIONS

- PHS, PDC, GSM, DCS1800, AMPS, CDMA, D-AMPS, PCS1900, etc.

## HOW TO ORDER

KT14 - E G R 28 N - 19.200M T

### Packaging

T = Tape and reel 2,000 pcs/reel

### Frequency (MHz)

|         |        |        |
|---------|--------|--------|
| 12.8000 | 14.850 | 19.440 |
| 13.000  | 16.800 | 19.680 |
| 14.400  | 19.200 | 19.800 |

### AFC Function

N = No, L = Yes (Trimmerless)

### Supply Voltage

28 = 2.8V, 30 = 3.0V

### Upper Operating Temp.

V = 80°C, T = 70°C, R = 60°C

### Lower Operating Temp.

C = -30°C, G = -10°C, E = -20°C

### Frequency Stability

K = ±5ppm, E = ±2.5ppm, D = ±2.0ppm

### Series




# Temperature Compensated Crystal Oscillators KT16 Series




## DIMENSIONS

millimeters (inches)

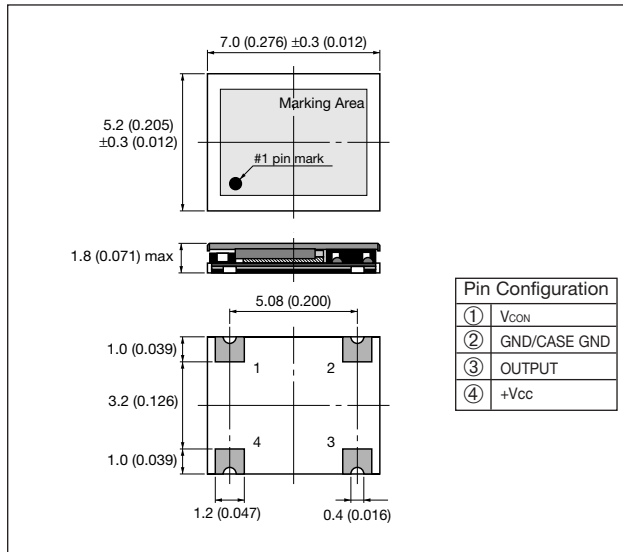

## TEST CIRCUIT

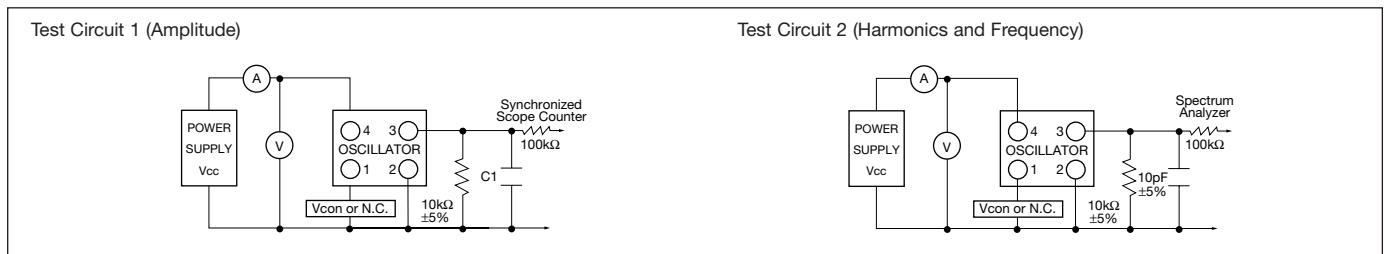

## SPECIFICATIONS

| Items                 | Code            | Specifications |        | Unit     | Remarks                       |
|-----------------------|-----------------|----------------|--------|----------|-------------------------------|
|                       |                 | Cellular       |        |          |                               |
| Supply Voltage        | V <sub>CC</sub> | 2.7            |        | V        | —                             |
|                       |                 | 3.0            |        |          |                               |
|                       |                 | 3.3            |        |          |                               |
| Output Frequency      | fo              | 26.000         | 19.440 | MHz      | —                             |
|                       |                 | 19.680         | 14.400 |          |                               |
|                       |                 | 13.000         | 12.800 |          |                               |
| Operating Temperature | Topr            | -30 to +80     |        | °C       | —                             |
| Storage Temperature   | Tstg            | -40 to +85     |        | °C       | —                             |
| Frequency Stability   | Δf/fo           | ±2.0 max.      |        | ppm      | vs temperature (after reflow) |
|                       |                 | ±2.5 max.      |        |          |                               |
|                       |                 | ±0.2 max.      |        | ppm      | vs load                       |
|                       |                 | ±0.3 max.      |        | ppm      | vs voltage                    |
| Aging Rate            | Aging           | ±1.0 max.      |        | ppm/year | 25°C±2°C                      |
| Output Voltage        | Vout            | 0.8 min.       |        | Vp-p     | load 10kΩ/10pF                |
| Supply Current        | Icc             | 1.5 max.       |        | mA       | —                             |
| Trimmer Control Range | Δf/C            | —              |        | ppm      | —                             |
| Voltage Control Range | Δf/V            | ±8.0 to ±15    |        | ppm      | —                             |
| Harmonics             | —               | -3.0 max.      |        | dBc      | —                             |

## FEATURES

- Miniature SMD type (7.0x5.2x1.8mm)
- Frequency adjustment free after reflow soldering process
- AFC function available
- 2.7V, 3.0V, 3.3V drive available
- Frequency Stability =  $\pm 2$ ppm at 30 to +80°C

## APPLICATIONS

- PDC, GSM, CDMA, TDMA

## HOW TO ORDER

KT16 - D C V 30 L - 19.680M T

### Packaging

T = Tape and reel 4,000 pcs/reel

### Frequency (MHz)

|        |        |        |
|--------|--------|--------|
| 12.800 | 14.850 | 19.440 |
| 13.000 | 16.800 | 19.680 |
| 14.400 | 19.200 | 19.800 |

### AFC Function

L = Yes

### Supply Voltage

28 = 2.8V, 30 = 3.0V

### Upper Operating Temp.

V = 80°C, T = 70°C, R = 60°C

### Lower Operating Temp.

C = -30°C, G = -10°C, E = -20°C

### Frequency Stability

K =  $\pm 5$ ppm, E =  $\pm 2.5$ ppm,

D =  $\pm 2.0$ ppm


### Series

# Temperature Compensated Crystal Oscillators KT18 Series




## DIMENSIONS

millimeters (inches)

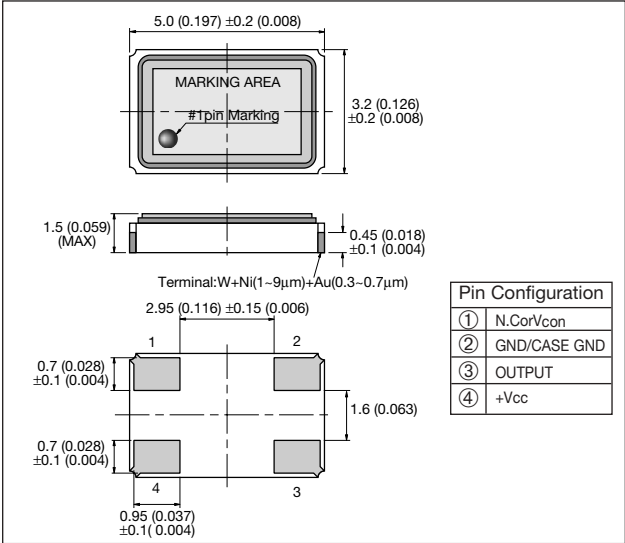

## TEST CIRCUIT

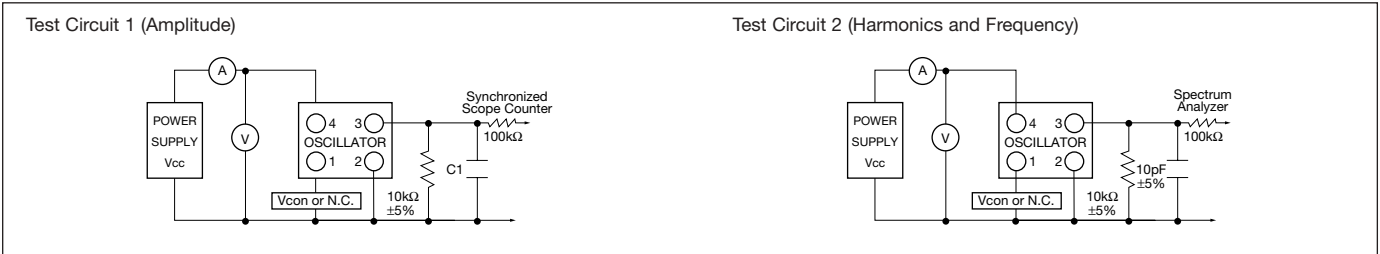

## SPECIFICATIONS

| Items                 | Code  | Specifications |        |        | Unit     | Remarks                       |
|-----------------------|-------|----------------|--------|--------|----------|-------------------------------|
|                       |       | Cellular       |        |        |          |                               |
| Supply Voltage        | Vcc   | 2.6 to 5.5     |        |        | V        | —                             |
| Output Frequency      | fo    | 26.000         | 19.440 | 19.200 | MHz      | —                             |
|                       |       | 19.680         | 14.400 | 19.800 |          |                               |
|                       |       | 13.000         | 12.800 | 16.800 |          |                               |
| Operating Temperature | Topr  | -30 to +80     |        |        | °C       | —                             |
| Storage Temperature   | Tstg  | -40 to +85     |        |        | °C       | —                             |
| Frequency Stability   | Δf/fo | ±1.5 max.      |        |        | ppm      | vs temperature (after reflow) |
|                       |       | ±2.0 max.      |        |        |          |                               |
|                       |       | ±0.2 max.      |        |        | ppm      | vs load                       |
|                       |       | ±0.3 max.      |        |        | ppm      | vs voltage                    |
| Aging Rate            | Aging | ±1.0 max.      |        |        | ppm/year | 25°C±2°C                      |
| Output Voltage        | Vout  | 0.8 min.       |        |        | Vp-p     | load 10kΩ/10pF                |
| Supply Current        | Icc   | 2.0 max.       |        |        | mA       | —                             |
| Trimmer Control Range | Δf/C  | —              |        |        | ppm      | —                             |
| Voltage Control Range | Δf/V  | ±8.0 to ±15    |        |        | ppm      | —                             |
| Harmonics             | —     | -3.0 max.      |        |        | dBc      | —                             |

## FEATURES

- Miniature SMD type (5.0x3.2x1.5mm)
- Frequency adjustment free after reflow soldering process
- AFC function available
- 2.6 to 5.5V drive available
- Frequency Stability =  $\pm 2$ ppm at 30 to +80°C

## APPLICATIONS

- PDC, GSM, CDMA, TDMA

## HOW TO ORDER

KT18 - D C V 30 A - 19.680M T

### Packaging

T = Tape and reel 4,000 pcs/reel

### Frequency (MHz)

|        |        |        |
|--------|--------|--------|
| 12.800 | 16.800 | 19.680 |
| 13.000 | 19.200 | 19.800 |
| 14.400 | 19.440 | 26.000 |

### AFC Function

A = Yes

### Supply Voltage

28 = 2.8V, 30 = 3.0V

### Upper Operating Temp.

V = 80°C, T = 70°C, R = 60°C

### Lower Operating Temp.

C = -30°C, G = -10°C, E = -20°C

### Frequency Stability


K =  $\pm 5$ ppm, E =  $\pm 2.5$ ppm, D =  $\pm 2.0$ ppm

### Series

# Temperature Compensated Crystal Oscillators




## RECOMMENDED LAND PATTERN

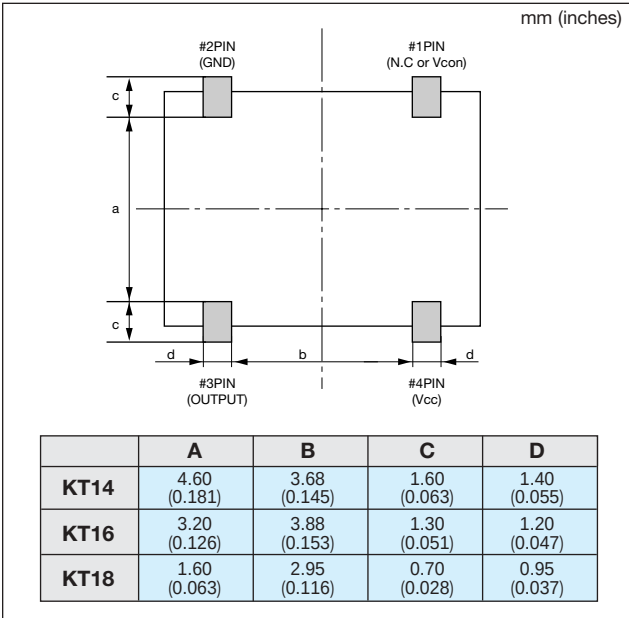


## REEL DIMENSIONS

millimeters (inches)

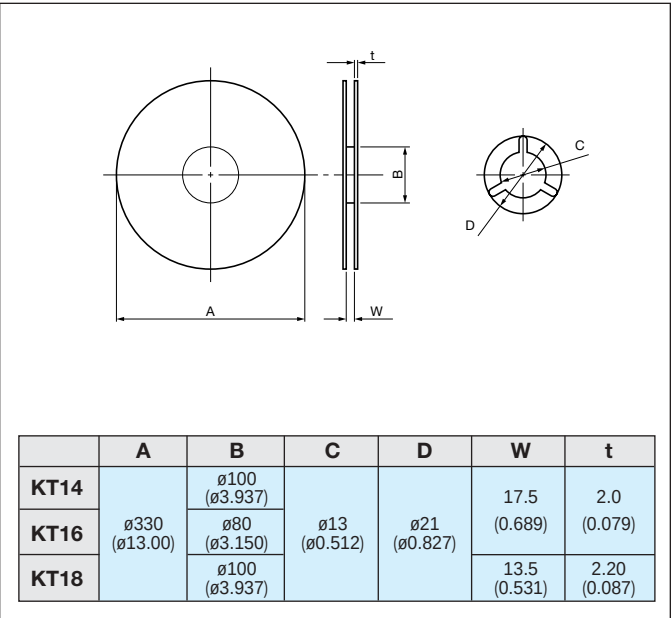


## PACKAGING

millimeters (inches)

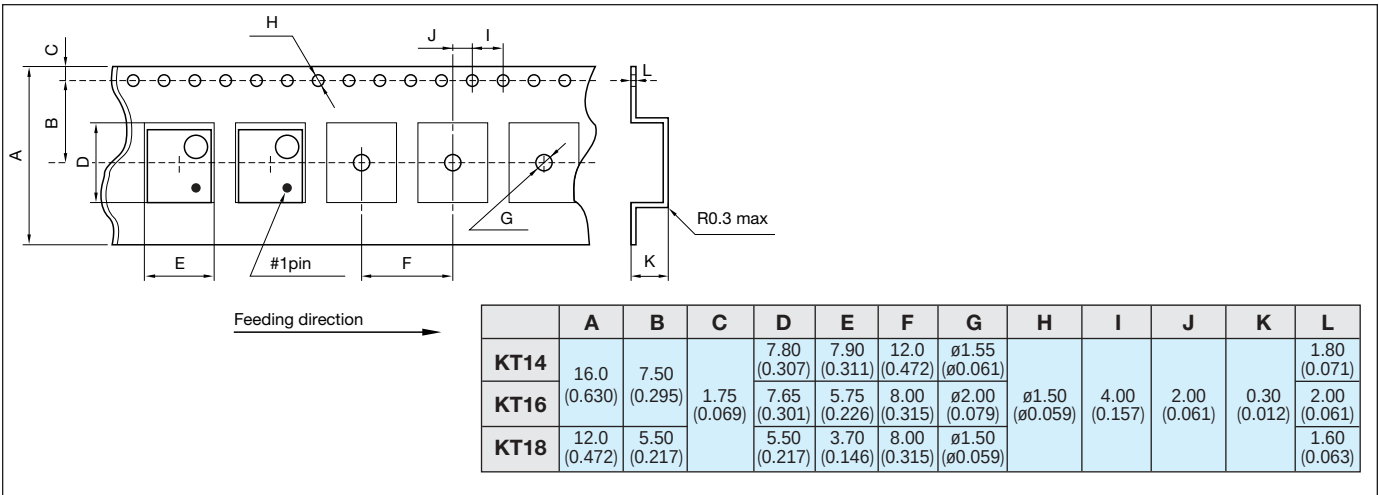

## RECOMMENDED REFLOW PROFILE

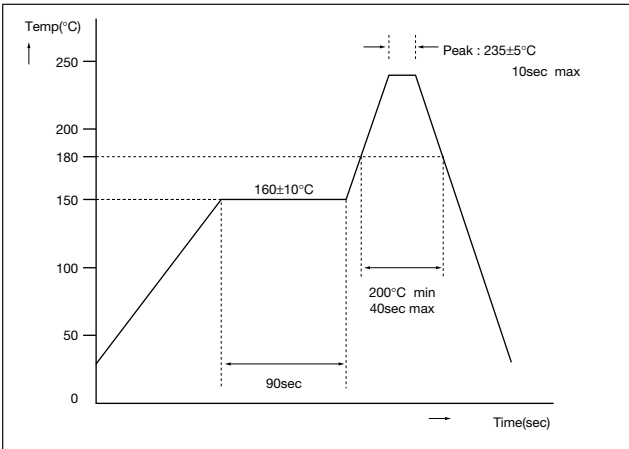


## PACKAGING

KT14: 2,000 pcs/reel  
KT16/KT18: 4,000 pcs/reel


# KHz Band Ceramic IF Filters



## KBF-RL, PL Series

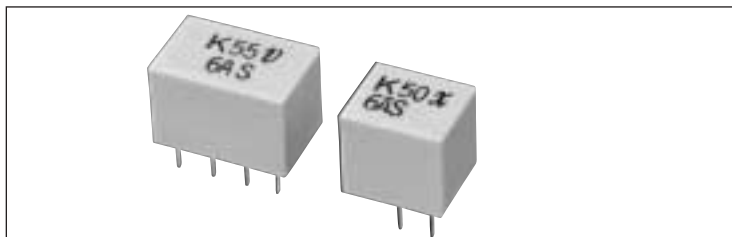


### TEST CIRCUIT

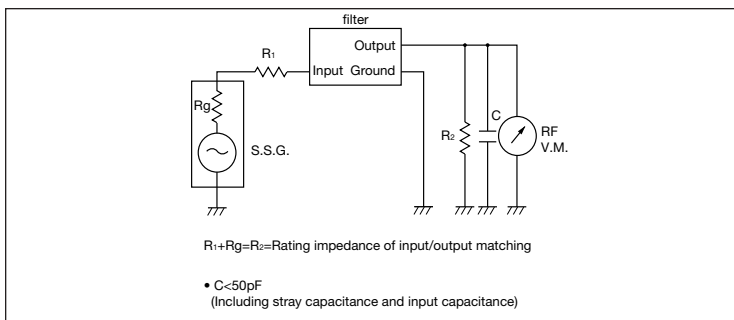

### DIMENSIONS

millimeters (inches)

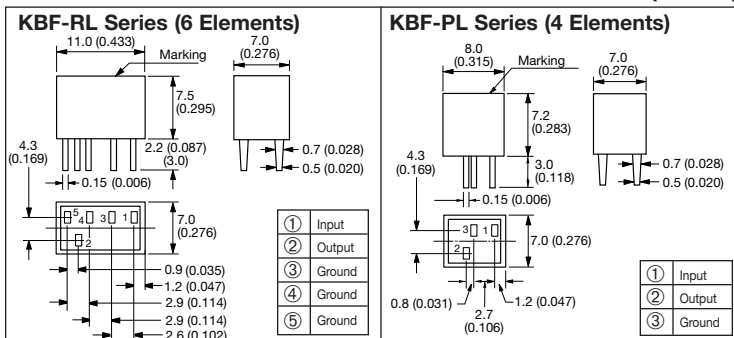

### SPECIFICATIONS (455 kHz)

#### KBF-RL Series (6 Elements)

| Part Number    | Center Frequency ( $f_0$ ) | Ripple     | Pass Band Width   |                    | Stop Band Attenuation | Insertion Loss | Input/Output Matching Impedance | Operating Temperature |
|----------------|----------------------------|------------|-------------------|--------------------|-----------------------|----------------|---------------------------------|-----------------------|
|                |                            |            | 6dB               | 40dB               |                       |                |                                 |                       |
| KBF-455RL-20A  | 455kHz $\pm$ 1.5kHz        | 2.0dB max. | $\pm$ 10kHz min.  | $\pm$ 20kHz max.   | 37dB min.             | 4dB max.       | 1.5k $\Omega$                   | -20°C to +80°C        |
| KBF-455RL-15A  |                            |            | $\pm$ 7.5kHz min. | $\pm$ 15kHz max.   |                       |                |                                 |                       |
| KBF-455RL-12A  |                            |            | $\pm$ 6.0kHz min. | $\pm$ 12.5kHz max. |                       |                |                                 |                       |
| KBF-455RL-10A  |                            |            | $\pm$ 5.0kHz min. | $\pm$ 12kHz max.   |                       |                |                                 |                       |
| KBF-455RL- 9A  |                            |            | $\pm$ 4.5kHz min. | $\pm$ 10kHz max.   |                       |                |                                 |                       |
| KBF-455RL- 7A  | 455kHz $\pm$ 1.0kHz        | 2.0dB max. | $\pm$ 3.5kHz min. | $\pm$ 9kHz max.    | 55dB min.             | 6dB max.       | 2.0k $\Omega$                   | -20°C to +80°C        |
| KBF-455RL- 6AS |                            |            | $\pm$ 3.0kHz min. | $\pm$ 9kHz max.    |                       |                |                                 |                       |
| KBF-455RL- 4AS |                            |            | $\pm$ 2.0kHz min. | $\pm$ 7.5kHz max.  |                       |                |                                 |                       |

#### KBF-PL Series (4 Elements)

| Part Number    | Center Frequency ( $f_0$ ) | Ripple     | Pass Band Width    |                    | Stop Band Attenuation | Insertion Loss | Input/Output Matching Impedance | Operating Temperature |
|----------------|----------------------------|------------|--------------------|--------------------|-----------------------|----------------|---------------------------------|-----------------------|
|                |                            |            | 6dB                | 40dB               |                       |                |                                 |                       |
| KBF-455PL-25A  | 455kHz $\pm$ 1.5kHz        | 2.0dB max. | $\pm$ 12.5kHz min. | $\pm$ 24kHz max.   | 27dB min.             | 4dB max.       | 1.5k $\Omega$                   | -20°C to +80°C        |
| KBF-455PL-20A  |                            |            | $\pm$ 10.0kHz min. | $\pm$ 20kHz max.   |                       |                |                                 |                       |
| KBF-455PL-15A  |                            |            | $\pm$ 7.5kHz min.  | $\pm$ 15kHz max.   |                       |                |                                 |                       |
| KBF-455PL-12A  |                            |            | $\pm$ 6.0kHz min.  | $\pm$ 12.5kHz max. |                       |                |                                 |                       |
| KBF-455PL-10A  |                            |            | $\pm$ 5.0kHz min.  | $\pm$ 12kHz max.   |                       |                |                                 |                       |
| KBF-455PL- 7A  | 455kHz $\pm$ 1.0kHz        | 2.0dB max. | $\pm$ 3.5kHz min.  | $\pm$ 9kHz max.    | 35dB min.             | 6dB max.       | 2.0k $\Omega$                   | -20°C to +80°C        |
| KBF-455PL- 6AS |                            |            | $\pm$ 3.0kHz min.  | $\pm$ 9kHz max.    |                       |                |                                 |                       |
| KBF-455PL- 4AS |                            |            | $\pm$ 2.0kHz min.  | $\pm$ 7.5kHz max.  |                       |                |                                 |                       |

Note: Center frequency is 450-460kHz available


### FEATURES

- Small and high selectivity
- Low insertion loss
- Adjustment free
- Various pass band width available

### APPLICATIONS

- Walkie & Talkie
- Car audio (AM radio section)
- Cordless phone
- Remote control receiver


### HOW TO ORDER

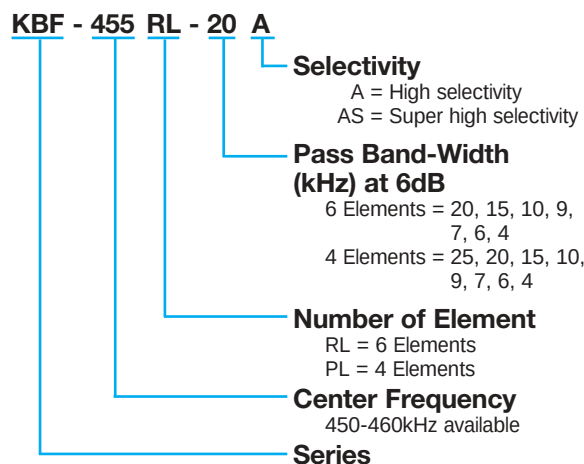


# KHz Band Ceramic IF Filters



## KBF-RS, PS Series

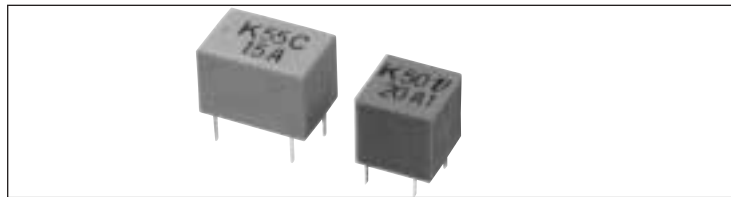


### TEST CIRCUIT

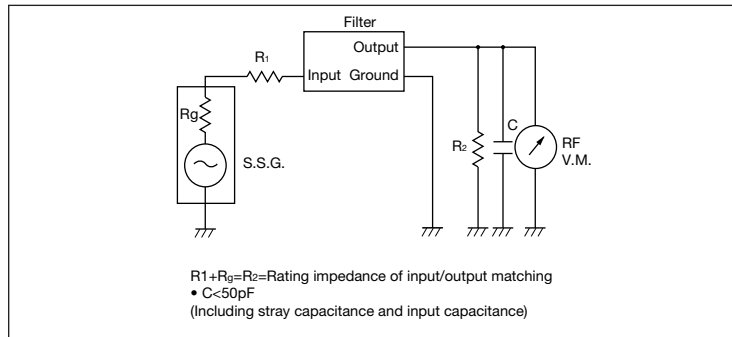

### DIMENSIONS

millimeters (inches)

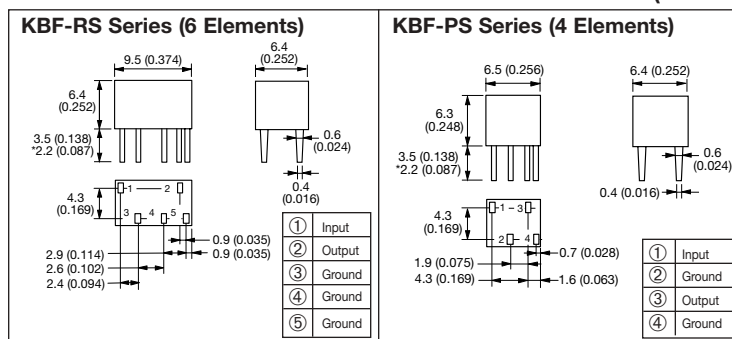

\*Lead length variation = 3.5 (0.138), 2.2 (0.087).

### SPECIFICATIONS (455 kHz)

#### KBF-RS Series (6 Elements)

| Part Number    | Center Frequency (f <sub>0</sub> ) | RIPPLE     | Pass Band Width |               | Stop Band Attenuation | Insertion Loss | Input/Output Matching Impedance | Operating Temperature |
|----------------|------------------------------------|------------|-----------------|---------------|-----------------------|----------------|---------------------------------|-----------------------|
|                |                                    |            | 6dB             | 40dB          |                       |                |                                 |                       |
| KBF-455RS-20A  | 455kHz±1.5kHz                      | 2.0dB max. | ±10kHz min.     | ±20kHz max.   | 37dB min.             | 4dB max.       | 1.5kΩ                           | -20°C to +80°C        |
| KBF-455RS-15A  |                                    |            | ±7.5kHz min.    | ±15kHz max.   |                       | 6dB max.       |                                 |                       |
| KBF-455RS-12A  |                                    |            | ±6.0kHz min.    | ±12.5kHz max. |                       |                |                                 |                       |
| KBF-455RS-10A  |                                    |            | ±5.0kHz min.    | ±12kHz max.   |                       |                |                                 |                       |
| KBF-455RS- 9A  | 455kHz±1.0kHz                      | 2.0dB max. | ±4.5kHz min.    | ±10kHz max.   | 55dB min.             | 6dB max.       | 2.0kΩ                           |                       |
| KBF-455RS- 7A  |                                    |            | ±3.5kHz min.    | ±9kHz max.    |                       |                |                                 |                       |
| KBF-455RS- 6AS |                                    |            | ±3.0kHz min.    | ±9kHz max.    |                       |                |                                 |                       |
| KBF-455RS- 4AS |                                    |            | ±2.0kHz min.    | ±7.5kHz max.  |                       |                |                                 |                       |

#### KBF-PS Series (4 Elements)

| Part Number    | Center Frequency<br>(f <sub>0</sub> ) | RIPPLE     | Pass Band Width |               | Stop Band Attenuation | Insertion Loss | Input/Output Matching Impedance | Operating Temperature |
|----------------|---------------------------------------|------------|-----------------|---------------|-----------------------|----------------|---------------------------------|-----------------------|
|                |                                       |            | 6dB             | 40dB          |                       |                |                                 |                       |
| KBF-455PS-25A  | 455kHz±1.5kHz                         | 2.0dB max. | ±12.5kHz min.   | ±24kHz max.   | 27dB min.             | 4dB max.       | 1.5kΩ                           | -20°C to +80°C        |
| KBF-455PS-20A  |                                       |            | ±10kHz min.     | ±20kHz max.   |                       | 6dB max.       | 2.0kΩ                           |                       |
| KBF-455PS-15A  |                                       |            | ±7.5kHz min.    | ±15kHz max.   |                       |                |                                 |                       |
| KBF-455PS-12A  |                                       |            | ±6.0kHz min.    | ±12.5kHz max. |                       |                |                                 |                       |
| KBF-455PS-10A  | 455kHz±1.0kHz                         | 2.0dB max. | ±5.0kHz min.    | ±12kHz max.   | 35dB min.             | 6dB max.       | 2.0kΩ                           | -20°C to +80°C        |
| KBF-455PS- 7A  |                                       |            | ±3.5kHz min.    | ±9kHz max.    |                       |                |                                 |                       |
| KBF-455PS- 6AS |                                       |            | ±3.0kHz min.    | ±9kHz max.    |                       |                |                                 |                       |
| KBF-455PS- 4AS |                                       |            | ±2.0kHz min.    | ±7.5kHz max.  |                       |                |                                 |                       |

Note: Center frequency is 450-460kHz available.


### FEATURES

- Small and low profile
- High selectivity
- Low insertion loss
- Adjustment free
- Various pass band width available

### APPLICATIONS

- Cordless phone
- Car audio
- (AM radio section)
- Pager
- Walkie & Talkie
- Remote control receiver


### HOW TO ORDER

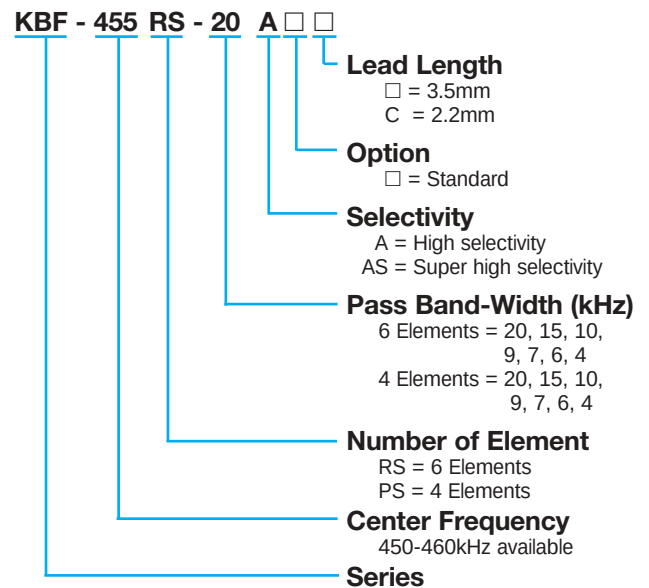


# Surface Acoustic Wave Filters



## PAFC Series

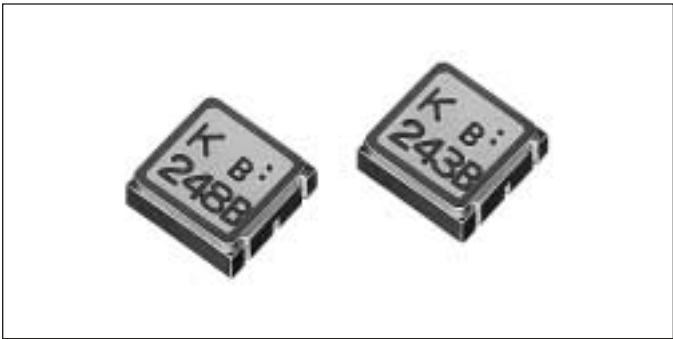

### DIMENSIONS

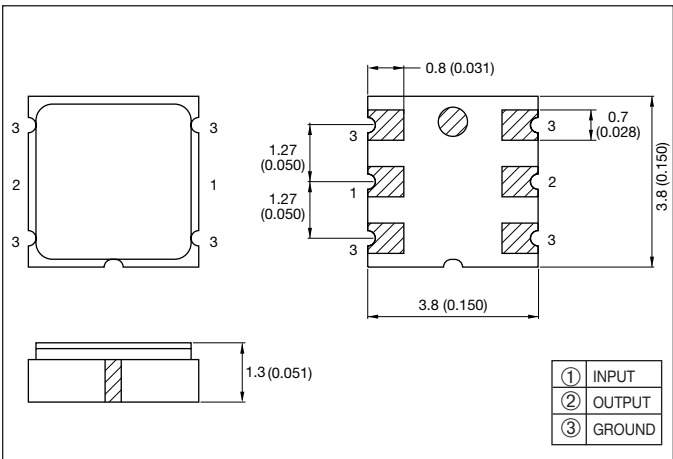


### FEATURES

- Small and low profile
- Ceramic package type
- Flat pass band characteristics
- Low insertion loss
- Circuit simplification


### APPLICATIONS

- PHS

### HOW TO ORDER

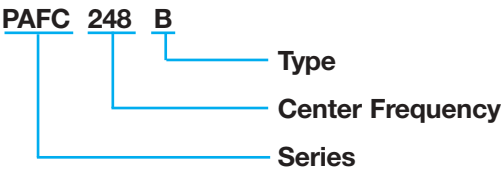


### TEST CIRCUIT

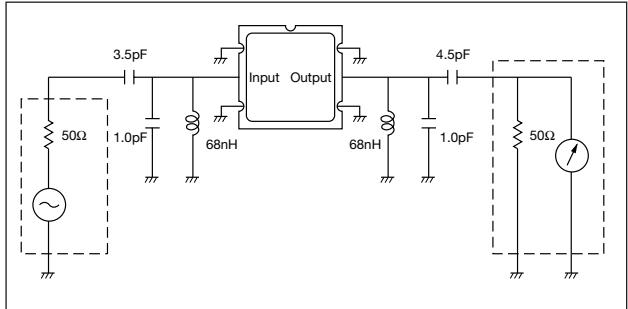


### SPECIFICATIONS

| Part Number | Normal Center Frequency (Fn) | Insertion Loss | Pass Band Width (at 3dB) | Stop Band Attenuation |           |           | Ripple (fn±110kHz) | Group Delay Time (fn±110kHz) | Operating Temperature |
|-------------|------------------------------|----------------|--------------------------|-----------------------|-----------|-----------|--------------------|------------------------------|-----------------------|
|             |                              |                |                          | fn±600kHz             | fn±1.2kHz | fn±faMHz* |                    |                              |                       |
| PAFC248B    | 248.45MHz                    | 4.0dB max.     | ±130kHz min.             | 30dB min.             | 40dB min. | 60dB min. | 1.5dB max..        | 1.2μs max.                   | -10 to 60°C           |
| PAFC243B    | 243.95MHz                    | 4.0dB max.     | ±130kHz min.             | 30dB min.             | 40dB min. | 60dB min. | 1.5dB max..        | 1.2μs max.                   | -10 to 60°C           |

### RECOMMENDED LAND PATTERN

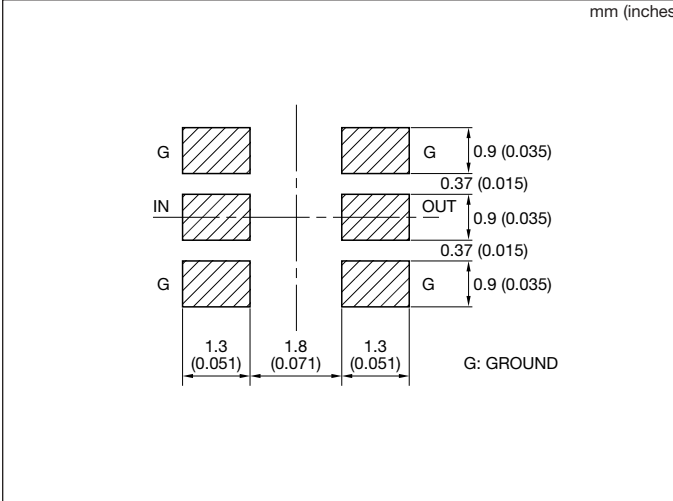

### TAPING DIMENSION

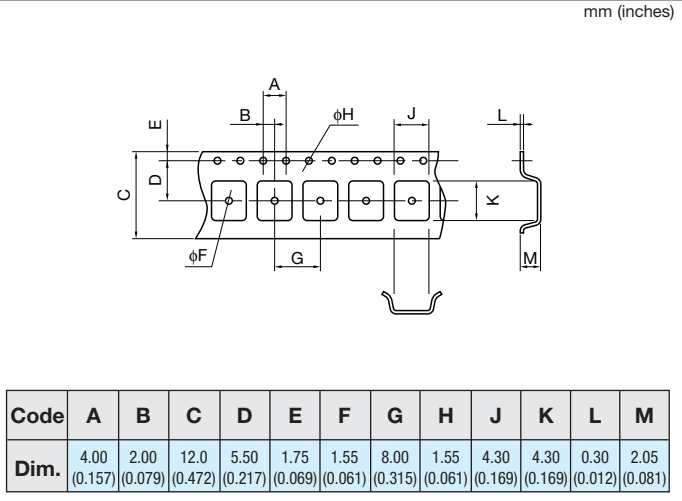


# Surface Acoustic Wave Filters

## PAFC Series




### RECOMMENDED TEMPERATURE PROFILE IR REFLOW

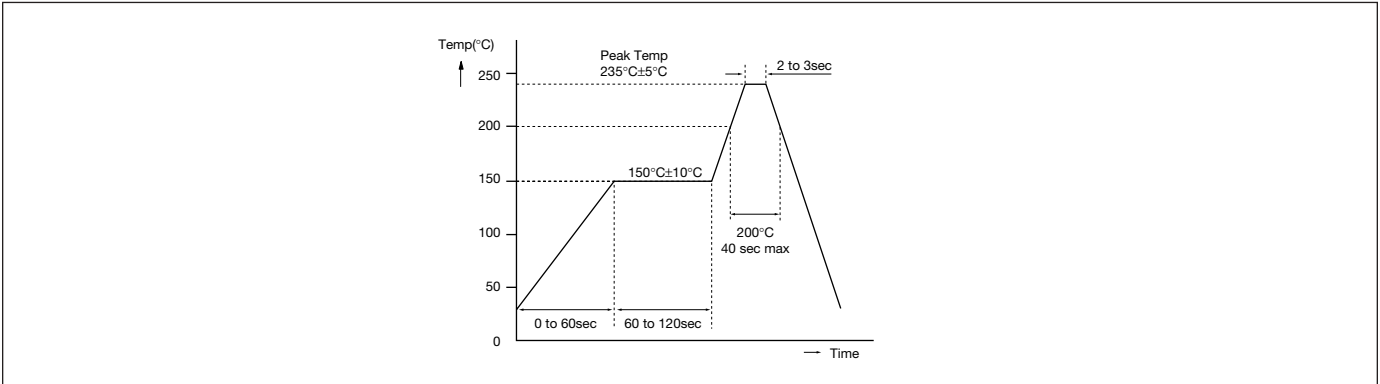


### CHARACTERISTICS


**PAFC248A Pass Band Characteristics**

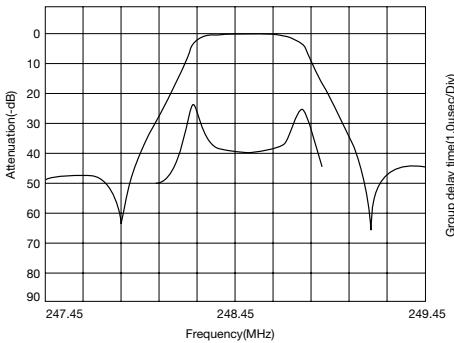


**PAFC248A Spurious Characteristics**

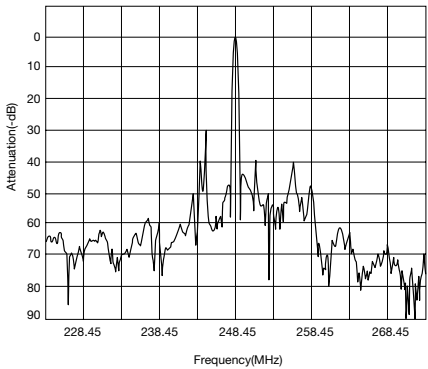

**PAFC243B Pass Band Characteristics**

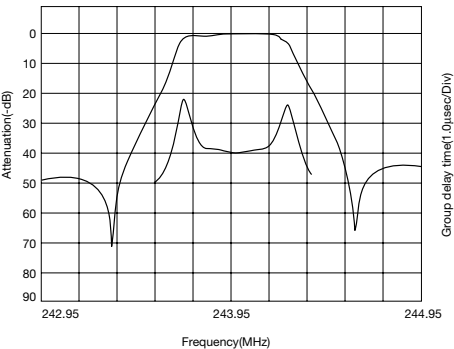

**PAFC243B Spurious Characteristics**

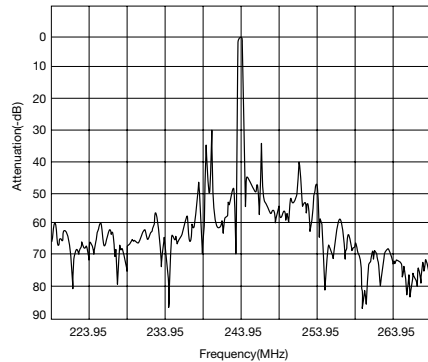

# Surface Acoustic Wave Filters



## SF Series



### FEATURES


- Small and low profile
- Low insertion loss
- High selectivity
- Withstanding high voltage

### APPLICATIONS

- PCS
- GPS




### HOW TO ORDER

SF 30 - 1880 M 6 UU 01

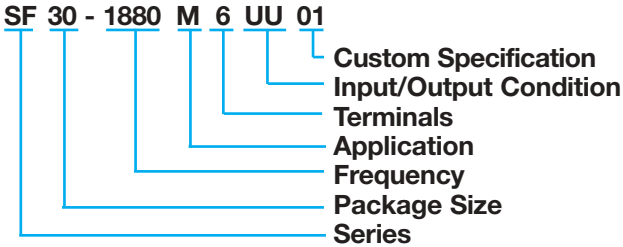

### DIMENSIONS

millimeters (inches)

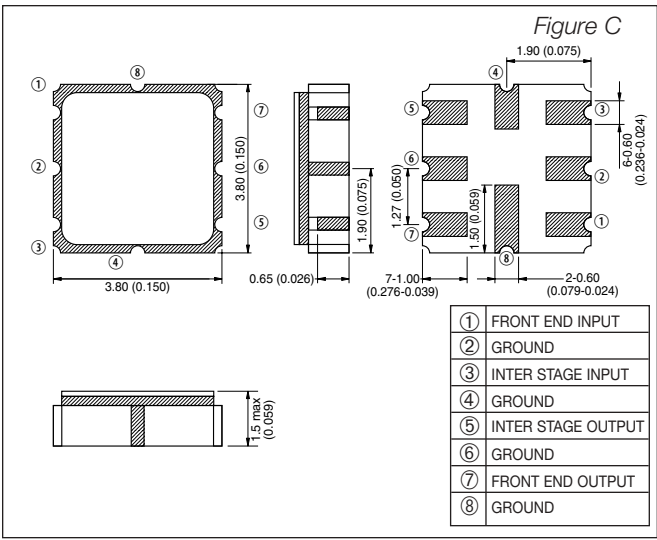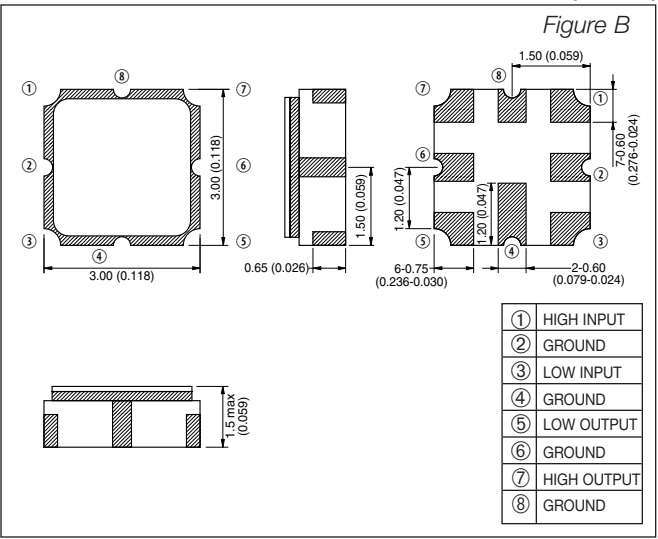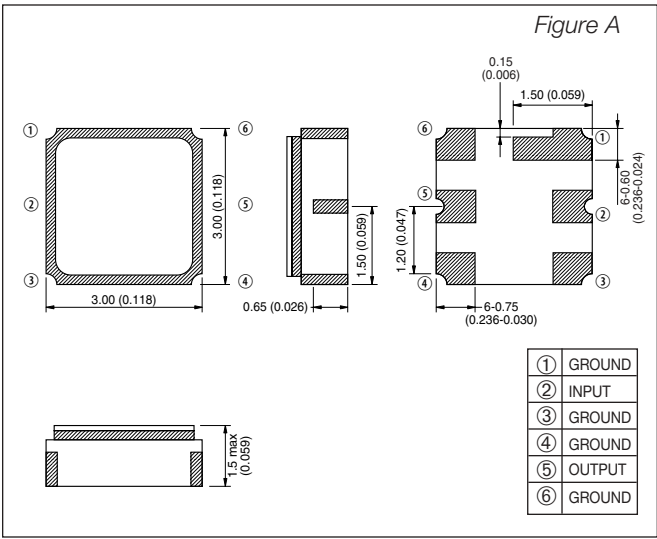






# Surface Acoustic Wave Filters

## SF Series



### RECOMMENDED LAND PATTERN

millimeters (inches)

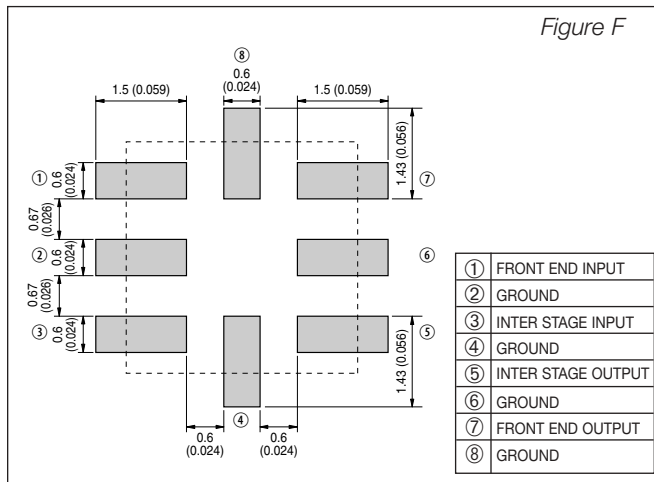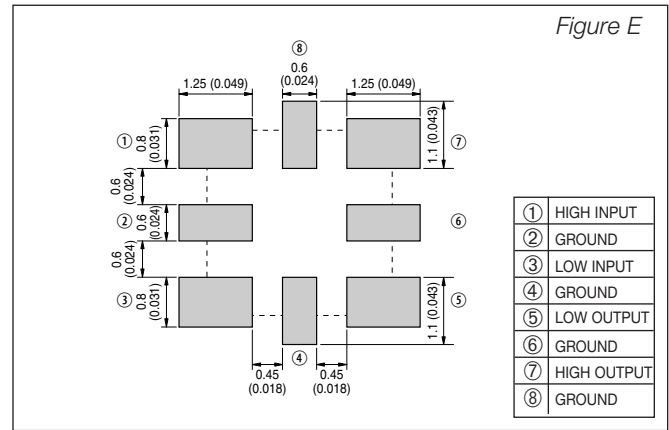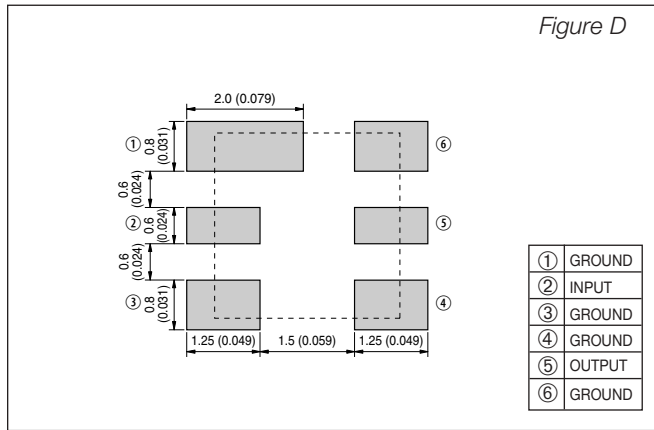

### SPECIFICATIONS

| Part No.        | Application | Pass Band Frequency | Pass Band Insertion Loss | Pass Band Variation | Pass Band VSWR | Absolute Rejection |           |           |           |           |           | Operating Temperature | Storage Temperature | Dim.   | Test Circuit | Rec. Land Pat. | Taping Dim. |
|-----------------|-------------|---------------------|--------------------------|---------------------|----------------|--------------------|-----------|-----------|-----------|-----------|-----------|-----------------------|---------------------|--------|--------------|----------------|-------------|
| SF30-1880M6UU00 | PCS Tx      | 1850MHz - 1910MHz   | 4.5dB max.               | 2.8dB max.          | 2.5            | 1590MHz            | 1720MHz   | 1930MHz   | 3400MHz   |           |           | -30 to +80°C          | -40 to +85°C        | Fig. A | Fig. G       | Fig. D         | Dim. 1      |
|                 |             |                     |                          |                     |                | 20dB min.          | 20dB min. | 7dB min.  | 15dB min. |           |           |                       |                     |        |              |                |             |
| SF30-1960M6UU00 | PCS Rx      | 1930MHz - 1990MHz   | 4.0dB max.               | 2.8dB max.          | 2.0            | 1509MHz            | 1850MHz   | 2100MHz   | 3400MHz   |           |           |                       |                     | Fig. A | Fig. G       | Fig. D         | Dim. 1      |
|                 |             |                     |                          |                     |                | 1780MHz            | 1910MHz   | 2375MHz   | 4350MHz   |           |           |                       |                     |        |              |                |             |
| SF30-1880H8UU00 | PCS (Half)  | Tx (Low)            | 1850MHz - 1880MHz        | 3.0dB max.          | 1.7dB max.     | 1700MHz            | 1760MHz   | 1960MHz   | 2700MHz   | 3000MHz   |           |                       |                     | Fig. B | Fig. H       | Fig. E         | Dim. 1      |
|                 |             |                     |                          |                     |                | 20dB min.          | 15dB min. | 32dB min. | 20dB min. | 7dB min.  |           |                       |                     |        |              |                |             |
|                 |             | Tx (High)           | 1880MHz - 1910MHz        | 3.0dB max.          | 1.7dB max.     | 1700MHz            | 1760MHz   | 1990MHz   | 2700MHz   | 3000MHz   |           |                       |                     |        |              |                |             |
|                 |             |                     |                          |                     |                | 20dB min.          | 15dB min. | 32dB min. | 20dB min. | 7dB min.  |           |                       |                     |        |              |                |             |
| SF38-1575T8UU00 | GPS 2 in 1  | Front End           | 1573.92MHz - 1576.92MHz  | 1.8dB max.          | 1.0dB max.     | 850MHz             | 1365MHz   | 1463MHz   | 1687MHz   | 1785MHz   | 1850MHz   | -30 to +80°C          | -40 to +85°C        | Fig. C | Fig. H       | Fig. F         | Dim. 2      |
|                 |             |                     |                          |                     |                | 17dB min.          | 25dB min. | 25dB min. | 25dB min. | 25dB min. | 28dB min  |                       |                     |        |              |                |             |
|                 |             | Inter Stage         | 1573.92MHz - 1576.92MHz  | 3.0dB max.          | 1.0dB max.     | 850MHz             | 1365MHz   | 1463MHz   | 1687MHz   | 1785MHz   | 1850MHz   |                       |                     |        |              |                |             |
|                 |             |                     |                          |                     |                | 28dB min.          | 35dB min. | 35dB min. | 35dB min. | 30dB min. | 28dB min. |                       |                     |        |              |                |             |
| SF30-1575F6UU00 | GPS Single  | Front End           | 1573.92MHz - 1576.92MHz  | 1.8dB max.          | 1.0dB max.     | 850MHz             | 1365MHz   | 1463MHz   | 1687MHz   | 1785MHz   | 1850MHz   |                       |                     | Fig. A | Fig. G       | Fig. D         | Dim. 1      |
|                 |             |                     |                          |                     |                | 17dB min.          | 25dB min. | 25dB min. | 25dB min. | 25dB min. | 28dB min  |                       |                     |        |              |                |             |
| SF30-1575S6UU00 | GPS Single  | Inter Stage         | 1573.92MHz - 1576.92MHz  | 2.5dB max.          | 1.0dB max.     | DC                 | 1300MHz   | 1710MHz   | 1820MHz   | 1820MHz   | 3000MHz   |                       |                     | Fig. A | Fig. G       | Fig. D         | Dim. 1      |
|                 |             |                     |                          |                     |                | 25dB min.          | 30dB min. | 25dB min. | 40dB min. | 30dB min. |           |                       |                     |        |              |                |             |


# Surface Acoustic Wave Filters




## SF Series

### CHARACTERISTICS

<PCS Tx Full>Parts No.: SF30-1880M6UU00

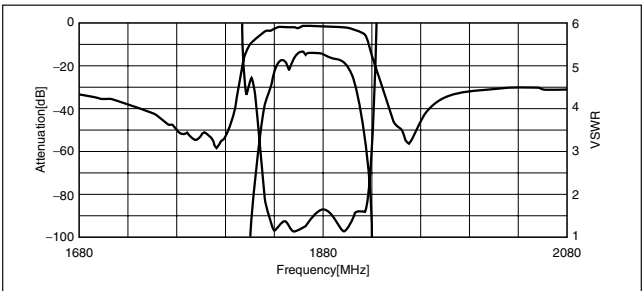


Pass Band Characteristics


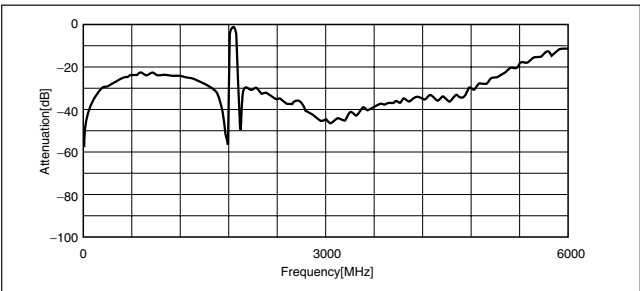


Spurious Characteristics


<PCS Tx Full>Parts No.: SF30-1880H8UU00

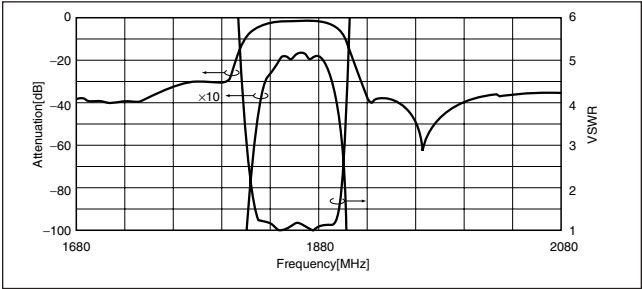

Low

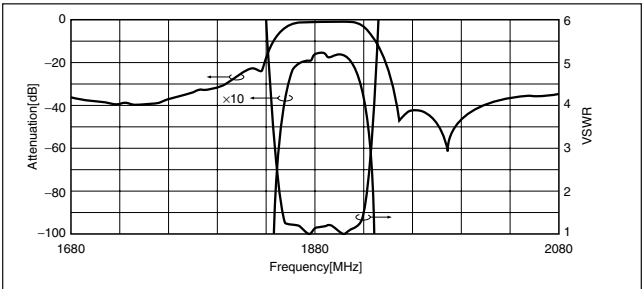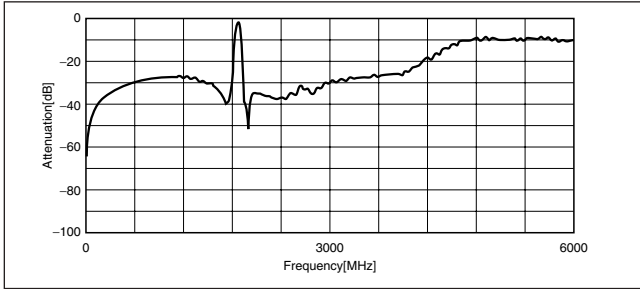


High

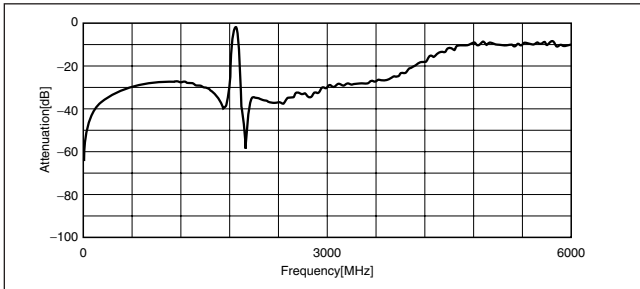



Pass Band Characteristics

Spurious Characteristics


<GPS 2 in 1>Parts No.: SF38-1575T8UU00

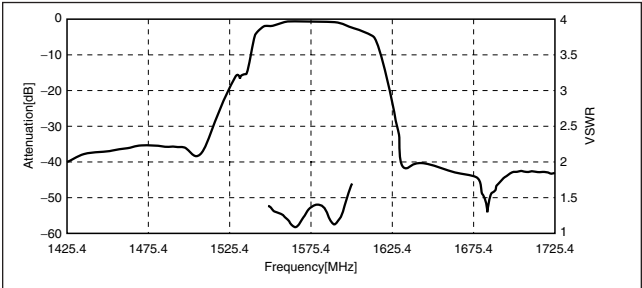

Front End

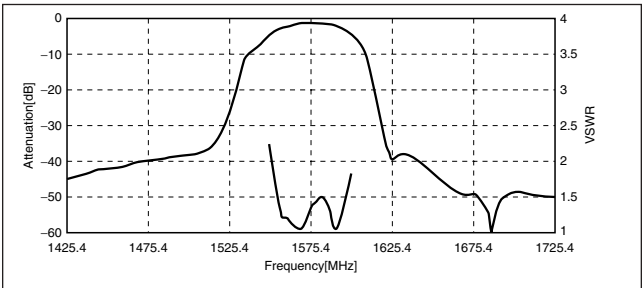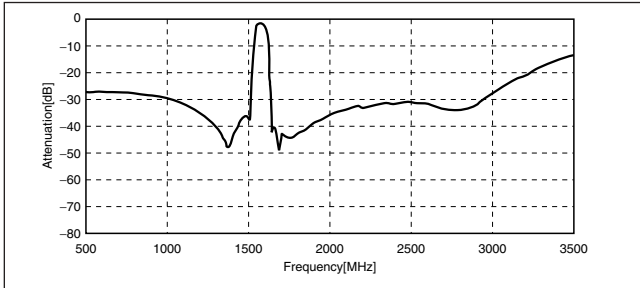

Inter Stage

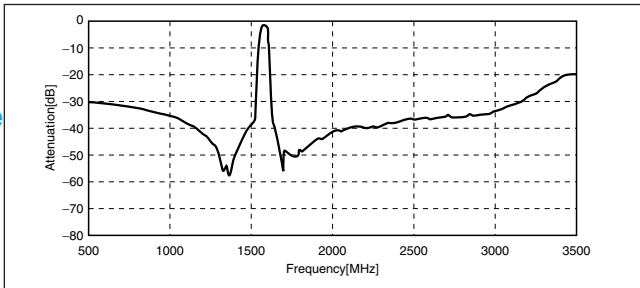

Pass Band Characteristics



Spurious Characteristics

# Surface Acoustic Wave Filters




## SF Series

### TEST CIRCUIT

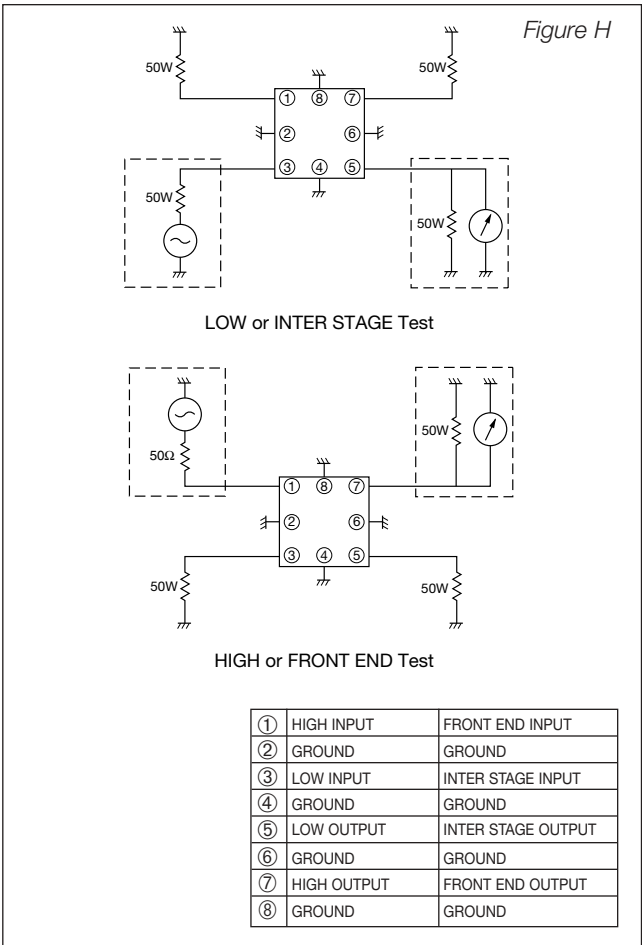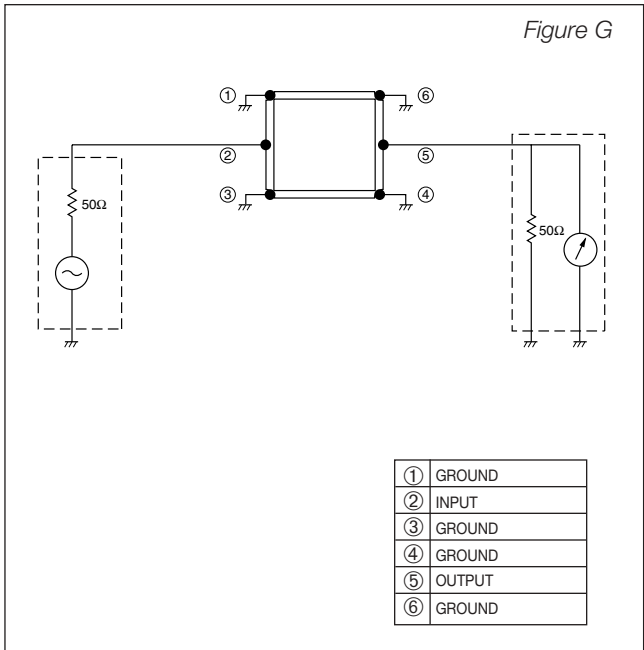


### RECOMMENDED TEMPERATURE PROFILE IR REFLOW

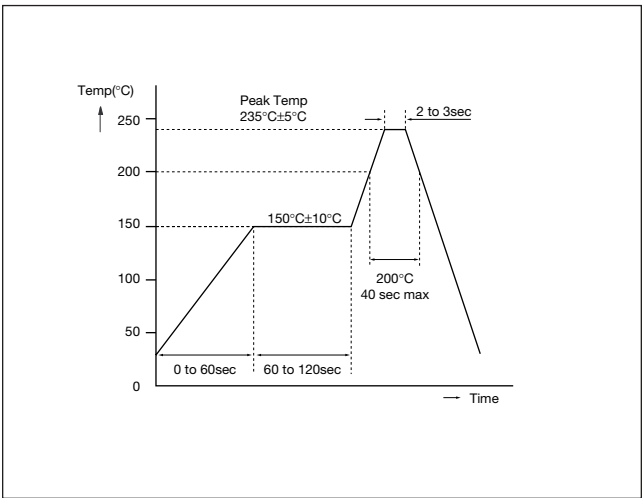

### TAPING DIMENSIONS

millimeters (inches)

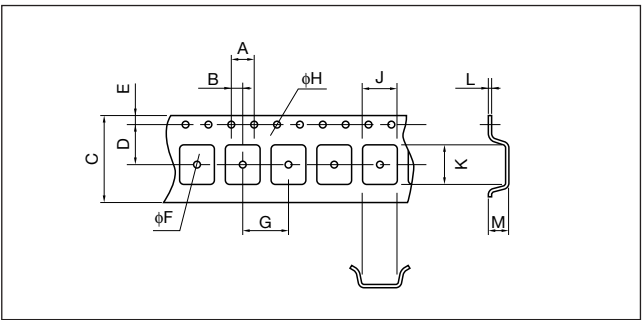

| Code   | A               | B               | C               | D               | F               | G               | H               | J               | K               | L               | M               |
|--------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Dim. 1 | 4.00<br>(0.157) | 2.00<br>(0.079) | 12.0<br>(0.472) | 5.50<br>(0.217) | 1.55<br>(0.061) | 8.00<br>(0.315) | 1.55<br>(0.061) | 3.30<br>(0.130) | 3.30<br>(0.130) | 0.30<br>(0.012) | 1.85<br>(0.073) |
| Dim. 2 | 4.00<br>(0.157) | 2.00<br>(0.079) | 12.0<br>(0.472) | 5.50<br>(0.217) | 1.55<br>(0.061) | 8.00<br>(0.315) | 1.55<br>(0.061) | 4.00<br>(0.157) | 4.00<br>(0.157) | 0.30<br>(0.012) | 1.40<br>(0.055) |

# Surface Acoustic Wave Filters




## KAF Series



### DIMENSIONS

millimeters (inches)

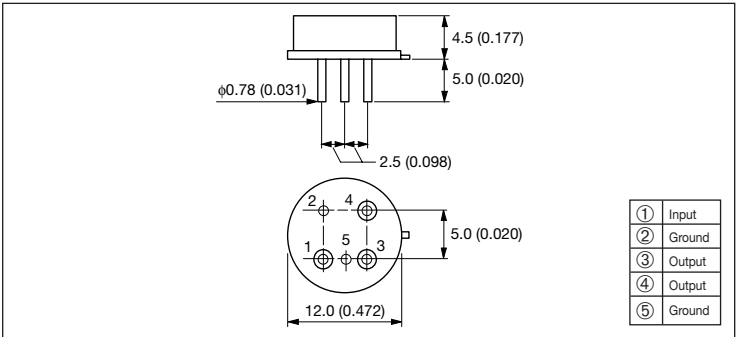


### FEATURES

- Adjustment free
- Component cost and space saving
- Excellent temperature characteristics
- High reliability


### APPLICATIONS

- BS tuner and converter
- CATV converter
- Cordless phone

### HOW TO ORDER

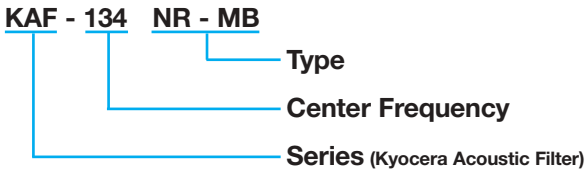

### TEST CIRCUIT

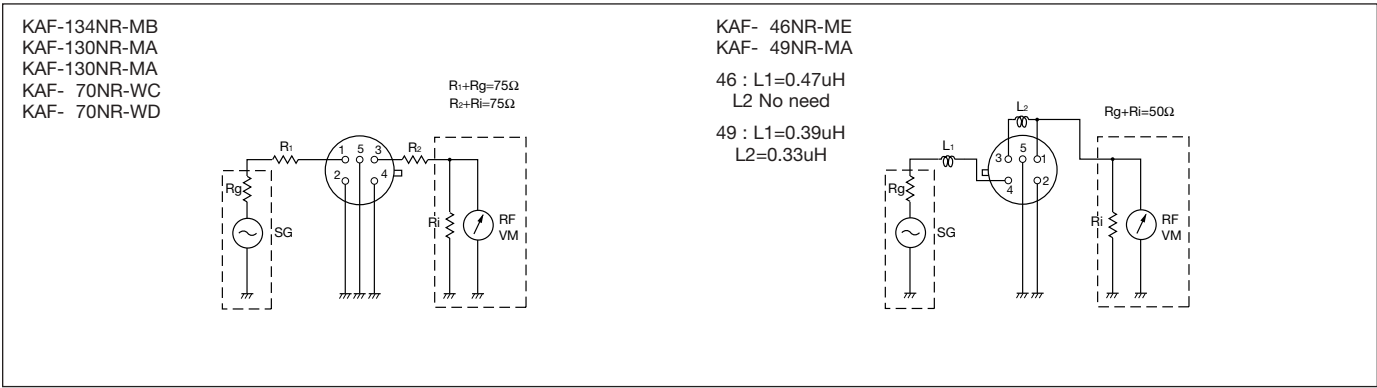


### SPECIFICATIONS

| Part Number  | Insertion Loss (dB) | Center Frequency (MHz)          | Pass Band Width at 3dB (MHz) | Pass Band Width at 30dB (MHz)  | Pass Band Ripple (dB) | Group Delay Time Ripple (nSec) | Spurious Characteristics (dB) | Frequency Temperature Coefficient (ppm/°C) |
|--------------|---------------------|---------------------------------|------------------------------|--------------------------------|-----------------------|--------------------------------|-------------------------------|--------------------------------------------|
| KAF-134NR-MB | 25 max.             | 134.26                          | 26 min.                      | 50 max.                        | 1.0 max.              | ±10                            | 35 min.<br>(30 to 200MHz)     | -80 max.                                   |
| KAF-130NR-MA | 22 max.             | 130                             | 22 min.                      | 45 max.                        |                       | ±20                            | 30 min.<br>(10 to 100MHz)     |                                            |
| KAF-130NR-MB | 21 max.             |                                 | 26 min.                      | 50 max.                        |                       |                                | 25 min.<br>(10 to 100MHz)     |                                            |
| KAF-70NR-WC  | 32 max.             | 70                              | 23 min.                      | 30 max.                        |                       | ±30                            |                               |                                            |
| KAF-70NR-WD  | 33 max.             | 70                              | 25 min.                      | 34 max.                        |                       |                                |                               |                                            |
| KAF-46NR-ME  | 3.0 max.            | 46.61 to 46.97MHz<br>6.0dB max. |                              | 49.67 to 49.99MHz<br>30dB max. |                       |                                |                               |                                            |
| KAF-49NR-MA  |                     | 49.67 to 49.99MHz<br>6.0dB max. |                              | 49.61 to 49.97MHz<br>30dB max. |                       |                                |                               |                                            |

# Antenna Switch Module



## LM-D118 Series - Dual Band

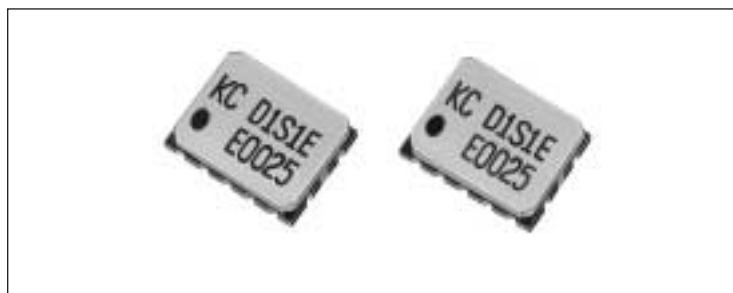

### FEATURES


- Built-in ESD protection circuit
- Built-in 4 coupling capacitors and bias circuit drive the switch
- Built-in 2LPF for receiver
- Small and low profile

### APPLICATIONS


- GSM/DCS, GSM/PCS

### DIMENSIONS

millimeters (inches)

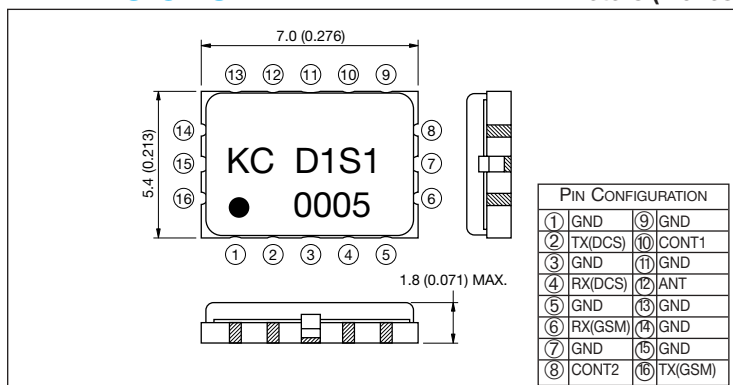

### HOW TO ORDER

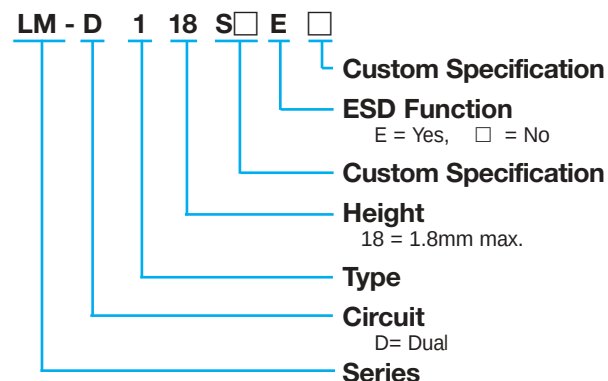


### SPECIFICATIONS

| Part Number | GSM         |                |                        |             |                | DCS          |                |                        |              |                |
|-------------|-------------|----------------|------------------------|-------------|----------------|--------------|----------------|------------------------|--------------|----------------|
|             | TX          |                |                        | RX          |                | TX           |                |                        | RX           |                |
|             | Freq. (MHz) | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz) | Ins. Loss (dB) | Freq. (MHz)  | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz)  | Ins. Loss (dB) |
| LM-D118S1E1 | 880 to 915  | ≤1.3           | ≥30                    | 925 to 960  | ≤1.5           | 1710 to 1785 | ≤1.6           | ≥25 (2*f0), ≥30 (3*f0) | 1805 to 1880 | ≤1.6           |


### RECOMMENDED LAND PATTERN

millimeters (inches)

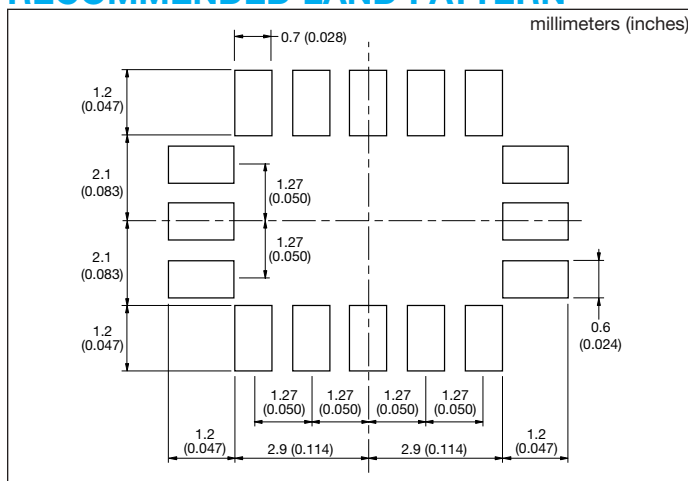

### RECOMMENDED REFLOW PROFILE


millimeters (inches)

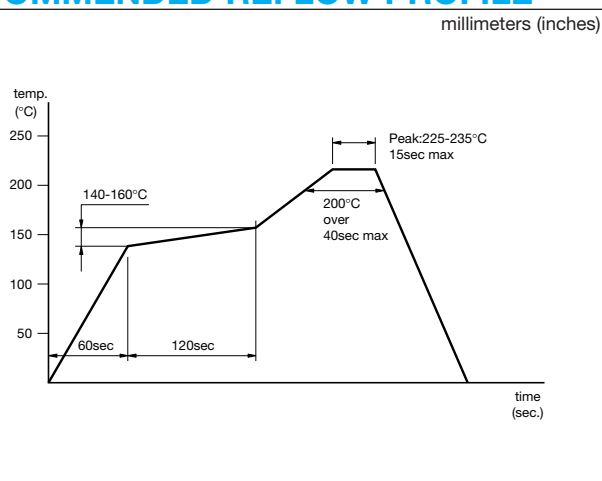

# Antenna Switch Module



## LM-D218 Series - Dual Band

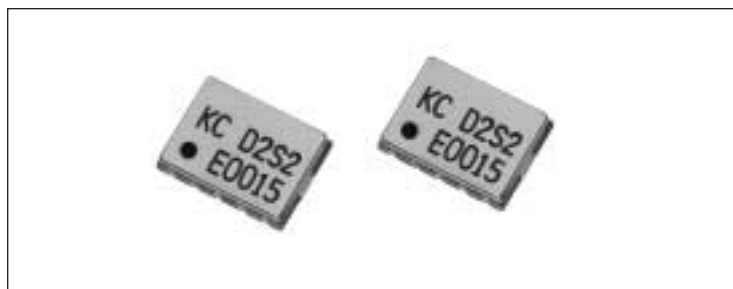

### FEATURES


- Built-in ESD protection circuit (Option)
- Built-in 2LPF for receiver
- Small and low profile

### APPLICATIONS


- GSM/DCS, GSM/PCS

### DIMENSIONS

millimeters (inches)

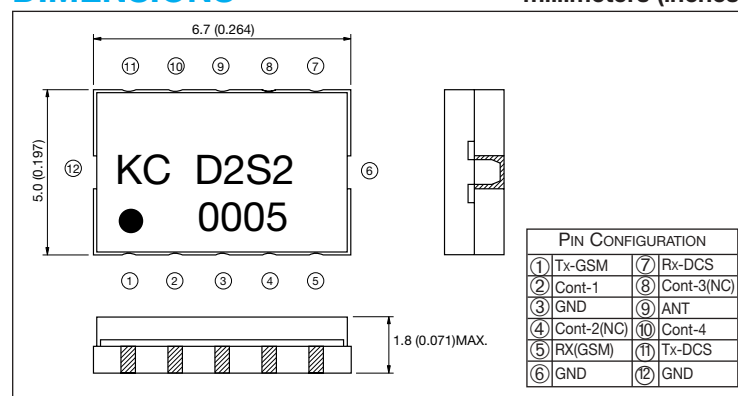

### HOW TO ORDER

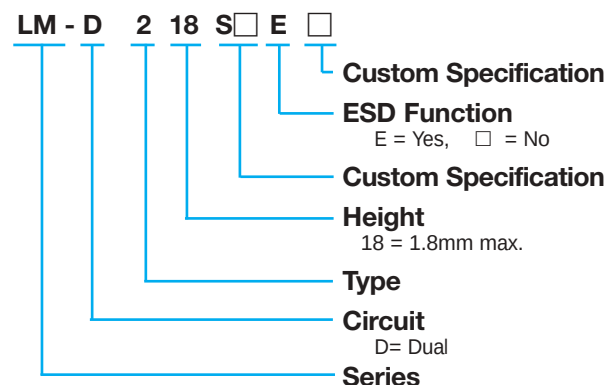


### SPECIFICATIONS

| Part Number | GSM         |                |                        |             |                | DCS          |                |                        |              |                |
|-------------|-------------|----------------|------------------------|-------------|----------------|--------------|----------------|------------------------|--------------|----------------|
|             | TX          |                |                        | RX          |                | TX           |                |                        | RX           |                |
|             | Freq. (MHz) | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz) | Ins. Loss (dB) | Freq. (MHz)  | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz)  | Ins. Loss (dB) |
| LM-D218S2-2 | 880 to 915  | ≤1.2           | ≥30                    | 925 to 960  | ≤1.3           | 1710 to 1785 | ≤1.5           | ≥25                    | 1805 to 1880 | ≤1.3           |


### RECOMMENDED LAND PATTERN

millimeters (inches)

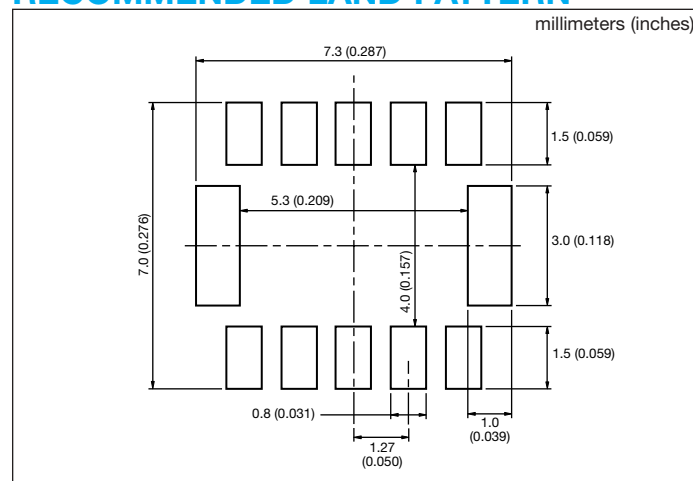

### RECOMMENDED REFLOW PROFILE

millimeters (inches)

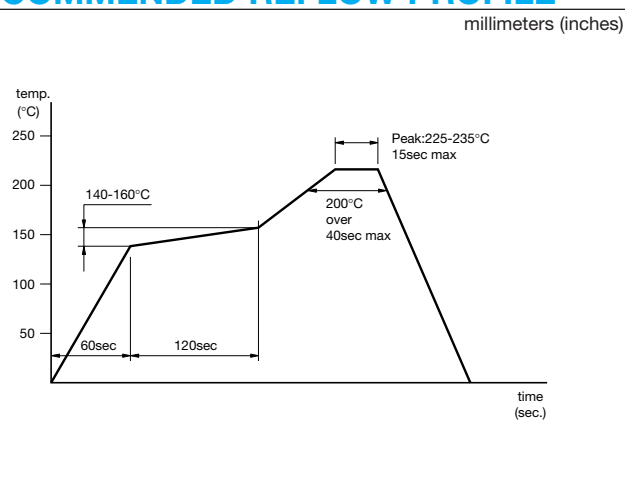

# Antenna Switch Module

## LM-D518 Series - Dual Band



### FEATURES


- Small Size
- Low Loss
- Built-in ESD protection circuit (Option)
- Built-in 2LPF for receiver

### APPLICATIONS


- GSM/DCS

### DIMENSIONS

millimeters (inches)

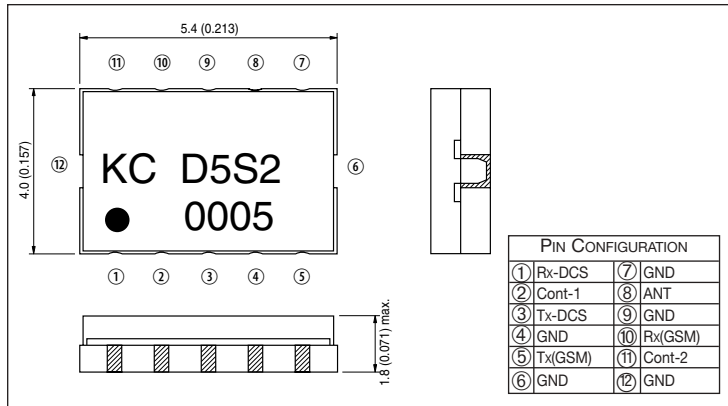


### HOW TO ORDER

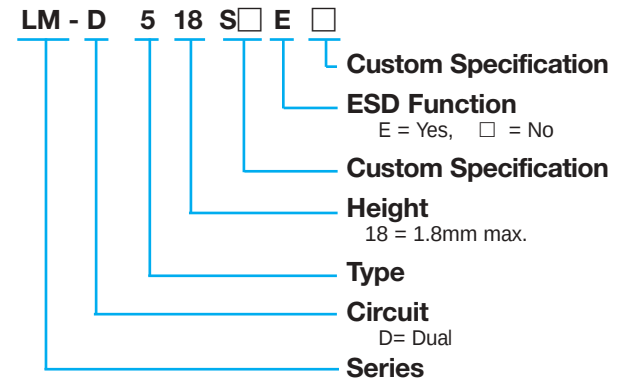


### SPECIFICATIONS

| Part Number | GSM         |                |                        |             |                | DCS          |                |                        |              |                |
|-------------|-------------|----------------|------------------------|-------------|----------------|--------------|----------------|------------------------|--------------|----------------|
|             | TX          |                |                        | RX          |                | TX           |                |                        | RX           |                |
|             | Freq. (MHz) | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz) | Ins. Loss (dB) | Freq. (MHz)  | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz)  | Ins. Loss (dB) |
| LM-D518S2-2 | 880 to 915  | ≤1.1           | ≥30                    | 925 to 960  | ≤1.2           | 1710 to 1785 | ≤1.3           | ≥25                    | 1805 to 1880 | ≤1.2           |

### RECOMMENDED LAND PATTERN

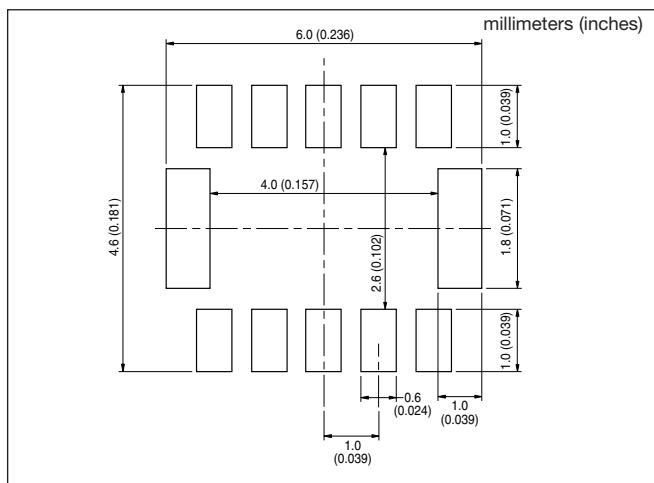


### RECOMMENDED REFLOW PROFILE

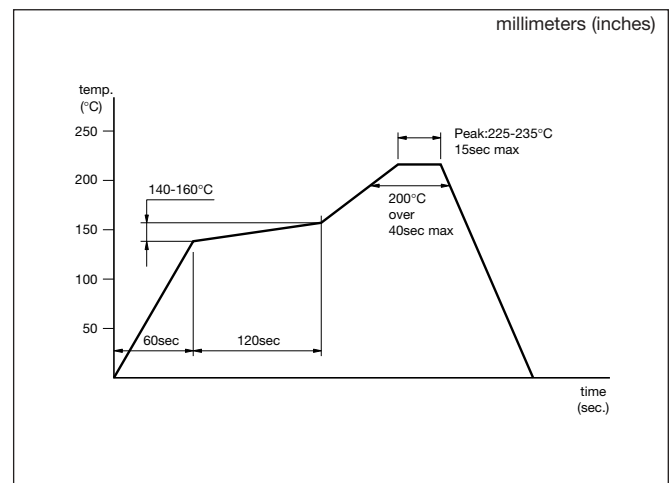

# Antenna Switch Module

## LM-T118 Series - Triple Band

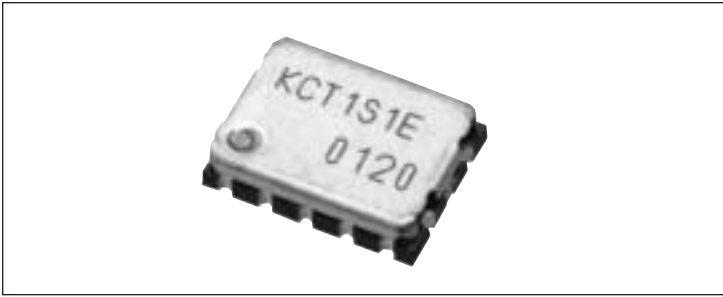

### FEATURES


- Built-in ESD protection circuit
- Built-in 2 coupling capacitors and bias circuit to drive the switch
- Built-in 2LPF for receiver
- Small and low profile

### APPLICATIONS


- GSM/DCS/PCS

### DIMENSIONS

millimeters (inches)

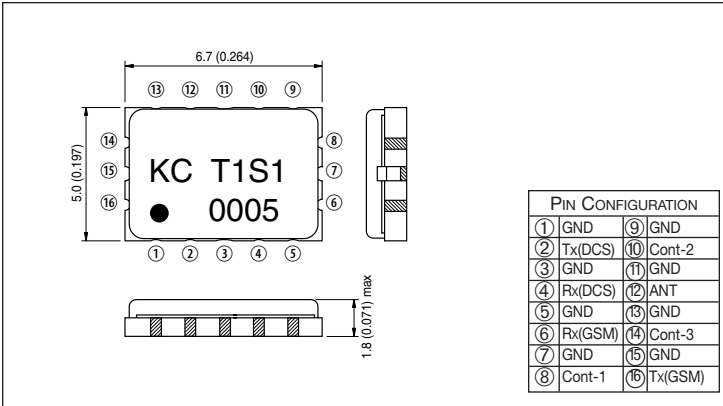


### HOW TO ORDER

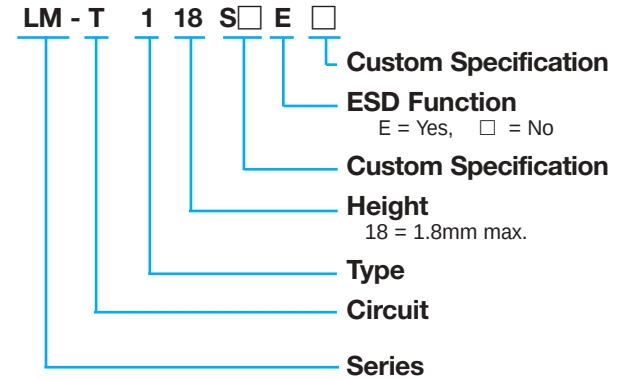


### SPECIFICATIONS

| Part Number | GSM         |                |                        |             |                | DCS/PCS      |                |                        |              |                |
|-------------|-------------|----------------|------------------------|-------------|----------------|--------------|----------------|------------------------|--------------|----------------|
|             | TX          |                |                        | RX          |                | TX           |                |                        | RX           |                |
|             | Freq. (MHz) | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz) | Ins. Loss (dB) | Freq. (MHz)  | Ins. Loss (dB) | Att. (2*f0, 3*f0) (dB) | Freq. (MHz)  | Ins. Loss (dB) |
| LM-T118S1E2 | 880 to 915  | ≤1.2           | ≥35(2*f0), ≥30(3*f0)   | 925 to 960  | ≤1.2           | 1710 to 1785 | ≤1.5           | ≥28(2*f0), ≥30(3*f0)   | 1805 to 1880 | ≤1.5           |
|             |             |                |                        |             |                | 1850 to 1910 |                |                        | 1930 to 1990 | ≤1.6           |

### RECOMMENDED LAND PATTERN

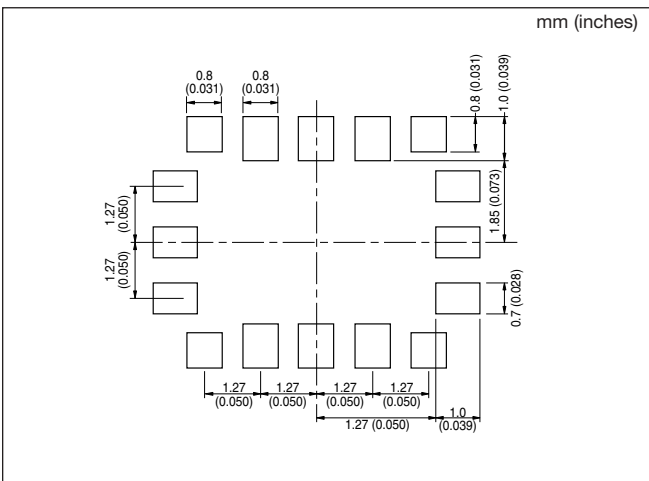

### RECOMMENDED REFLOW PROFILE

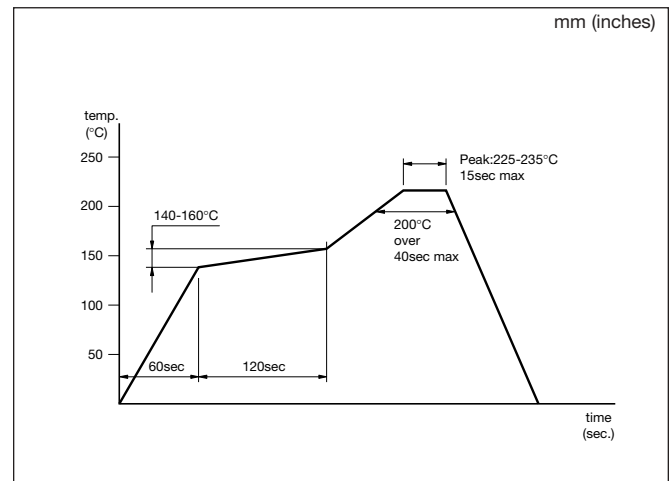






### DIMENSIONS

millimeters (inches)

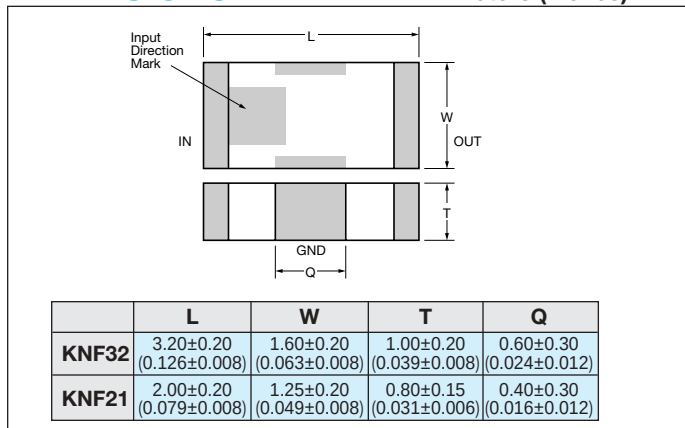

### SPECIFICATIONS

| Part Number | Cut Off Frequency (MHz) | Capacitance (+50/-20%) (pF) | 20dB Attenuation (Typical) | Rated Current (mA) | Rated Voltage (VDC) |
|-------------|-------------------------|-----------------------------|----------------------------|--------------------|---------------------|
| KNF32025    | 25MHz                   | 235pF                       | 200 - 600 MHz              | 200mA              | 25VDC               |
| KNF32050    | 50MHz                   | 130pF                       | 350 - 850 MHz              |                    |                     |
| KNF32100    | 100MHz                  | 65pF                        | 450 - 950 MHz              |                    |                     |
| KNF32200    | 200MHz                  | 33pF                        | 700 - 1200 MHz             |                    |                     |
| KNF21025    | 25MHz                   | 235pF                       | 200 - 600 MHz              | 150mA              |                     |
| KNF21050    | 50MHz                   | 130pF                       | 350 - 850 MHz              |                    |                     |
| KNF21100    | 100MHz                  | 65pF                        | 450 - 950 MHz              |                    |                     |
| KNF21200    | 200MHz                  | 33pF                        | 700 - 1200 MHz             |                    |                     |
| KNF21400    | 400MHz                  | 17pF                        | 900 - 1400 MHz             |                    |                     |

Cut off frequency at attenuation typical 3dB, max 6dB  
Operating temperature = -25 to 85(°C)

### FEATURES

- Disturbed constant type LC filter. Prevents ringing caused by circuit impedance. Suitable for high speed digital circuits and visual line circuits.
- Stable noise attenuation over wide frequency ranges
- Low profile (H=0.95mm max.) suitable for miniature electronic equipment
- First class auto-placement

### APPLICATIONS

- PCs, laser printers, cellular phone, clock data lines for LCD display
  - High speed video signal circuits and interface circuits
  - High speed digital circuits
  - Anti-noise solution
- Achieves effective noise suppression in noisy high speed circuits without signal waveform distortion

### HOW TO ORDER

KNF - 21 050 - W 3

Quantity Per Reel

3 = 3,000 pcs

Taping Direction (See Table 1)

W = Standard

X = Option

Frequency

025 = 25MHz 200 = 200MHz

050 = 50MHz 400 = 200MHz

100 = 100MHz




Size EIA (EIAJ)

32 = 1206 (3216)

21 = 0805 (2012)

Series

### FREQUENCY CHARACTERISTICS

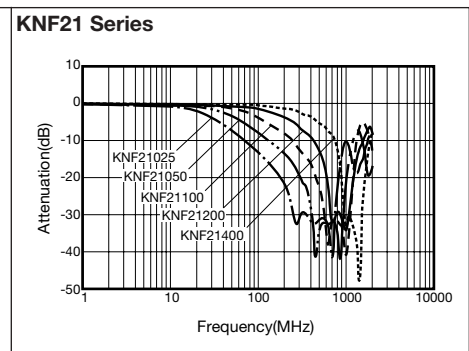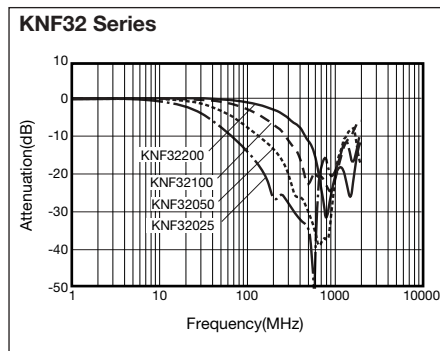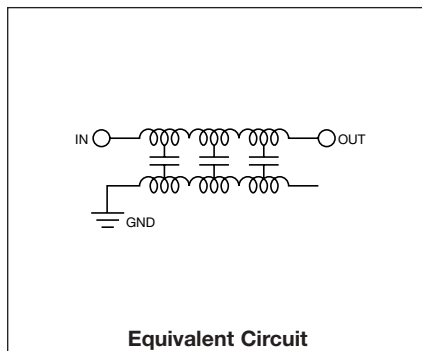


## KNF Series


### <IMPEDANCE FREE>

- Stable attenuation against impedance change
- Good impedance matching without ringing on distortion even at the time of IC ON/OFF and pattern layout change


### TEST CIRCUIT

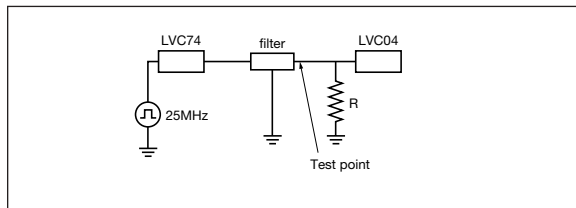

### OUTPUT WAVE FORM (Clock Frequency 25MHz)

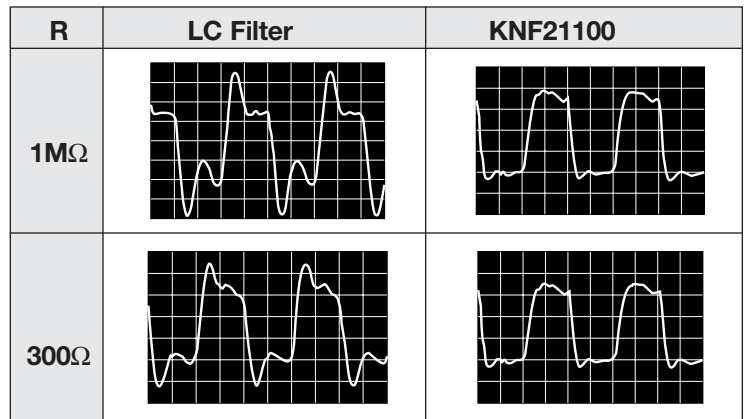


### <NO RINGING> - EXCELLENT IMPEDANCE MATCHING

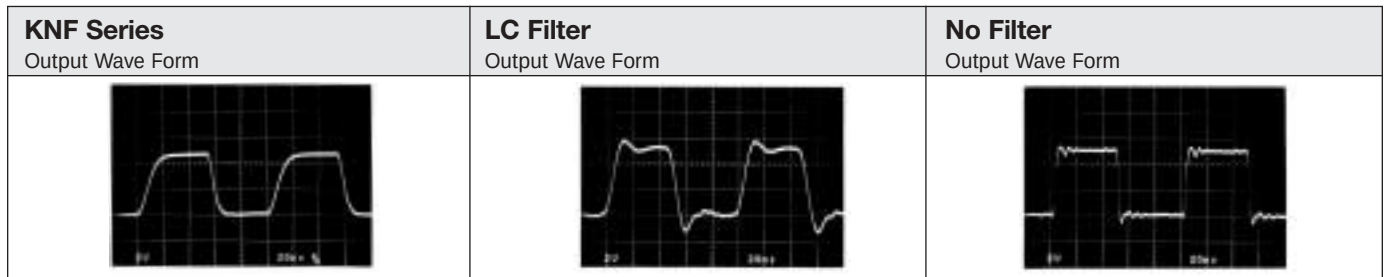


- Wide attenuation up to high frequency range without distortion


### TEST CIRCUIT

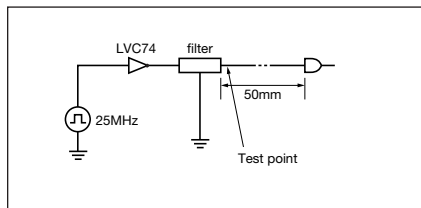


### WIDE ATTENUATION BANDWIDTH

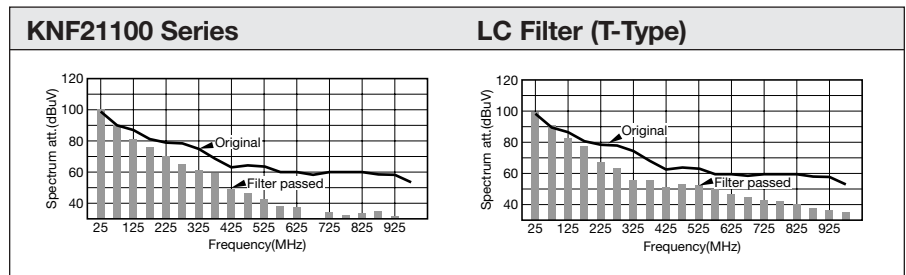

### RECOMMENDED LAND PATTERN

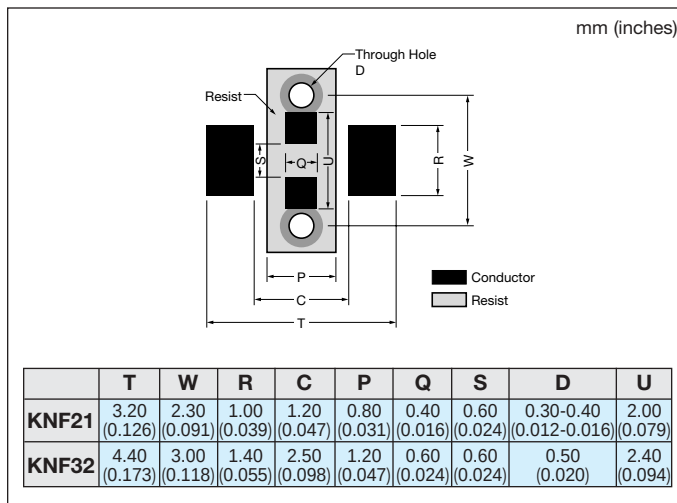


### PACKAGING SPECIFICATION (Table 1)

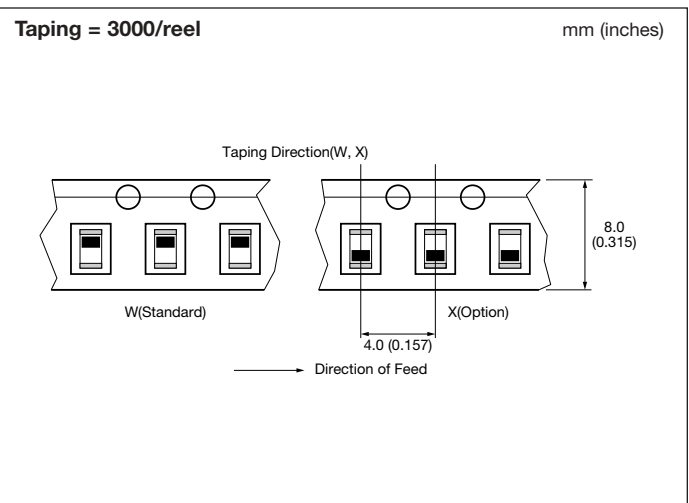

# EMI Filter Array




## KNA Series

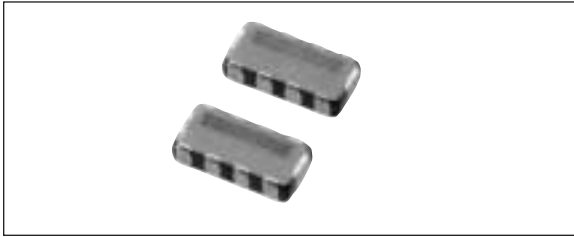


### DIMENSIONS

millimeters (inches)

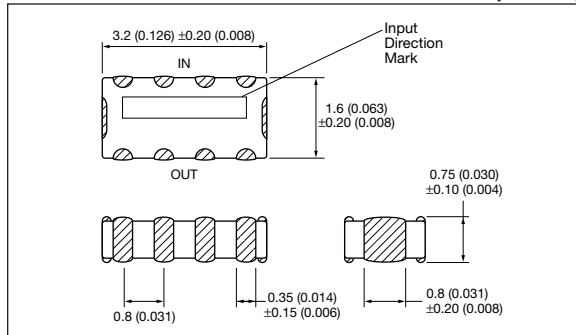

### FREQUENCY CHARACTERISTICS

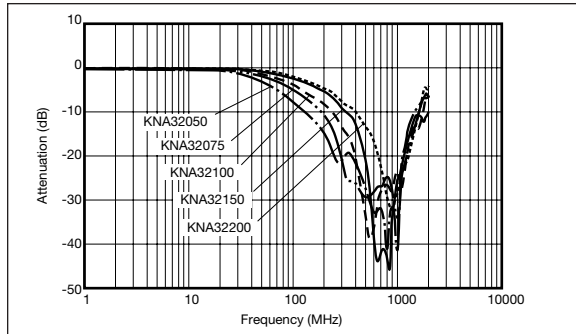


### SPECIFICATIONS

| Part Number | Cut Off Frequency (MHz) | Capacitance (+50/-20%) (pF) | 20dB Attenuation (Typical) | Rated Current (mA) | Rated Voltage (VDC) |
|-------------|-------------------------|-----------------------------|----------------------------|--------------------|---------------------|
| KNA32050    | 50MHz                   | 115pF                       | 350 - 850 MHz              | 100mA              | 25VDC               |
| KNA32075    | 75MHz                   | 82pF                        | 400 - 900 MHz              | 100mA              | 25VDC               |
| KNA32100    | 100MHz                  | 65pF                        | 450 - 950 MHz              | 100mA              | 25VDC               |
| KNA32150    | 150MHz                  | 45pF                        | 600 - 1100 MHz             | 100mA              | 25VDC               |
| KNA32200    | 200MHz                  | 35pF                        | 700 - 1200 MHz             | 100mA              | 25VDC               |

Operating temperature = -25 to 85(°C)

### RECOMMENDED LAND PATTERN

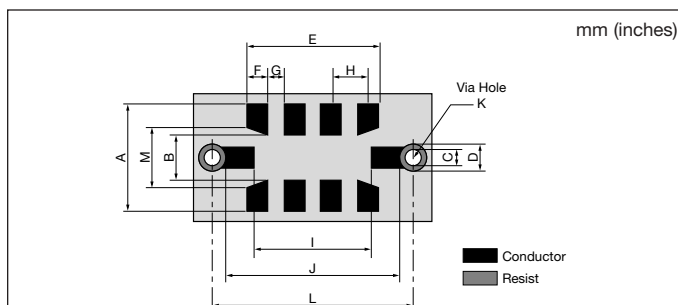

### FEATURES

- Disturbed constant type LC filter. Prevents ringing caused by circuit impedance. Suitable for high speed digital circuits and visual line circuits.
- Stable noise attenuation over wide frequency ranges.
- Low profile (H=1.0mm max.) suitable for miniature electronic equipment.
- First class auto-placement

### APPLICATIONS

- PCs, laser printers, cellular phone, clock data lines for LCD display
  - High speed video signal circuits and interface circuits
  - High speed digital circuits
  - Anti-noise solution
- Achieves effective noise suppression in noisy high speed circuits without signal waveform distortion

### HOW TO ORDER

KNA - 32 050 - W 3

**Quantity Per Reel**

3 = 3,000 pcs

**Taping Direction (See Table 1)**

W = Standard X = Option

**Frequency**

050 = 50MHz 100 = 100MHz 200 = 200MHz


\*Frequency at Attenuation typical 3dB, Max 6dB

**Size EIA (EIAJ)**

32 = 1206 (3216)


**Series**

### PACKAGING SPECIFICATION (Table 1)

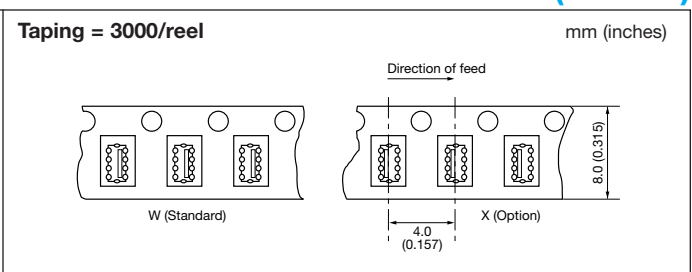

| Code      | A            | B            | C            | D            | E            | F            | G            | H            | I            | J            | K                       | L            | M            |
|-----------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------------------|--------------|--------------|
| Dimension | 2.20 (0.087) | 1.00 (0.039) | 0.40 (0.016) | 0.60 (0.024) | 2.80 (0.110) | 0.40 (0.016) | 0.40 (0.016) | 0.80 (0.031) | 2.60 (0.102) | 3.80 (0.150) | 0.30-0.40 (0.012-0.016) | 4.20 (0.165) | 1.30 (0.051) |

## KNH Series

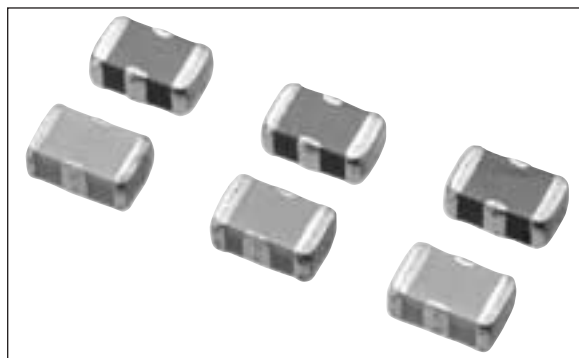

### FEATURES


- 0805 size. Rated current up to 2A.
- Wider Attenuation bandwidth due to distributed constant circuit type
- Particularly effective for filtering power (Vcc) lines

### APPLICATIONS


- PCs, laser printers, cellular phone, power/signal lines for LCD display, office equipment
- AV power supply/signal line, TV, VCR, etc.
- High current signal lines

### DIMENSIONS

millimeters (inches)

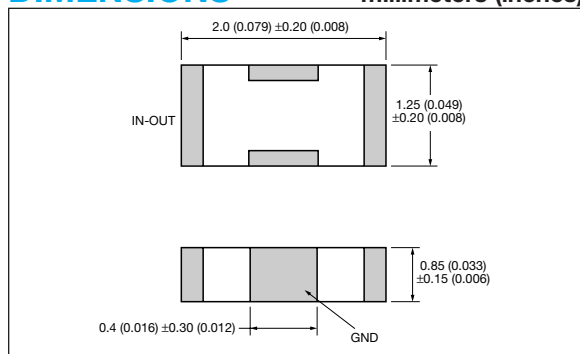

### ATTENUATION CHARACTERISTICS

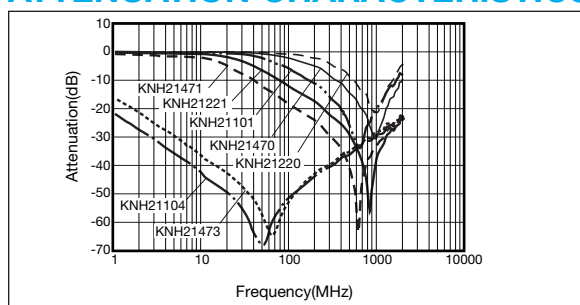

### HOW TO ORDER

KNH - 21 104 - 3 AA

#### Code

AA = Standard

#### Quantity Per Reel

3 = 3,000 pcs

#### Capacitance Value

101 = 100pF 220 = 22pF  
104 = 100nF 221 = 220pF

470 = 47pF  
471 = 470pF  
473 = 47nF

#### Size EIA (EIAJ)

21 = 0805 (2012)

#### Series

### SPECIFICATIONS


| Type     | Capacitance (+50/-20%) (pF) | Rated Current (A) | Rated Voltage (VDC) | Direct-Current Resistance ( $\Omega$ ) |
|----------|-----------------------------|-------------------|---------------------|----------------------------------------|
| KNH21104 | 100,000                     | 2.0               | 25                  | <0.02                                  |
| KNH21473 | 47,000                      | 2.0               | 50                  | <0.02                                  |
| KNH21471 | 470                         | 1.0               | 50                  | <0.08                                  |
| KNH21221 | 220                         | 1.0               | 50                  | <0.08                                  |
| KNH21101 | 100                         | 1.0               | 50                  | <0.08                                  |
| KNH21470 | 47                          | 1.0               | 50                  | <0.08                                  |
| KNH21220 | 22                          | 1.0               | 50                  | <0.08                                  |

Operating temperature = -25 to 85(°C)


### <ELECTRICAL CHARACTERISTICS>

- Wide attenuation range including surrounding circuit


### TEST CIRCUIT

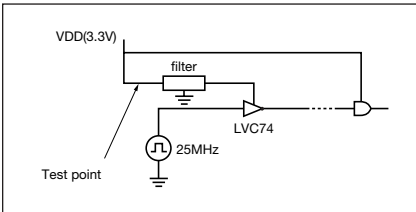


### ATTENUATION EFFECT OF POWER SUPPLY NOISE

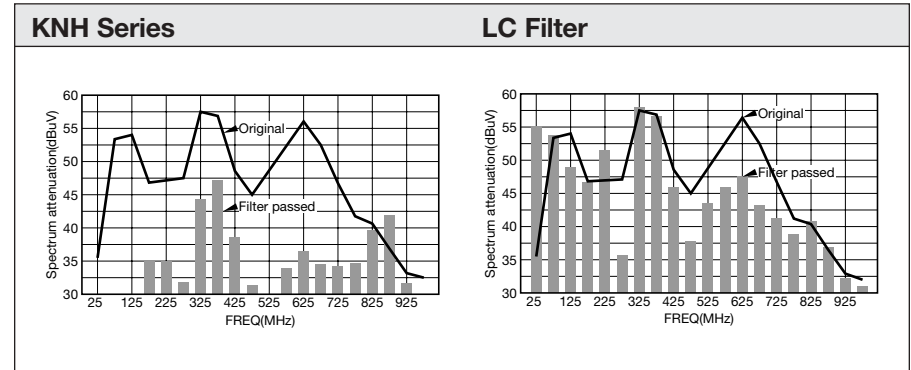

### RECOMMENDED LAND PATTERN

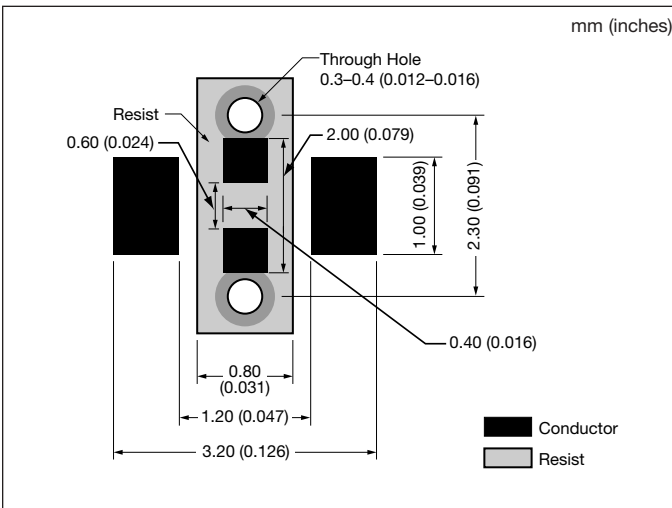

### PACKAGING SPECIFICATION

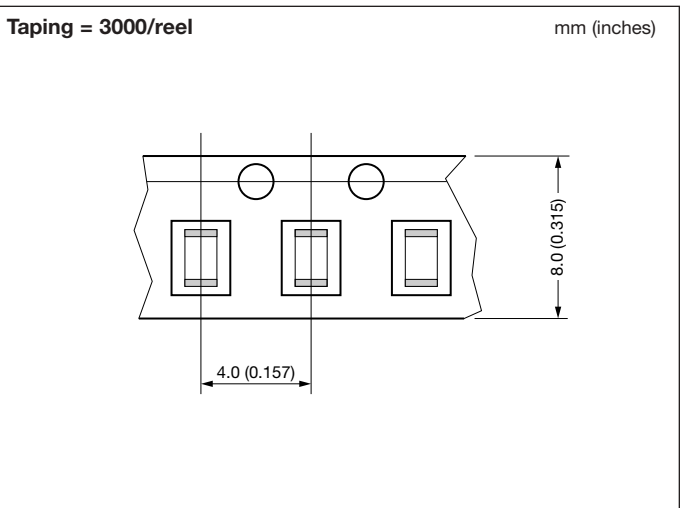


# Piezo Ceramic Elements



## KBS Series




### DIMENSIONS

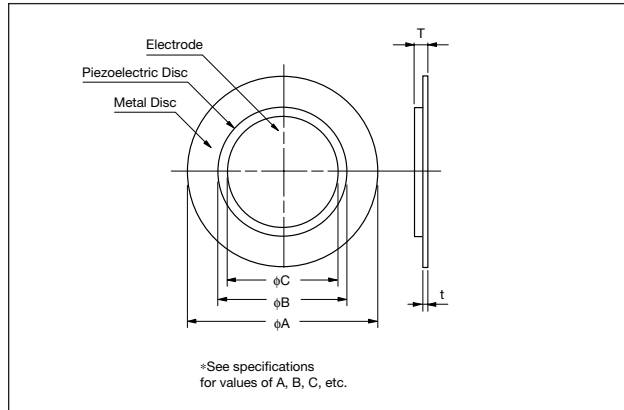

### STANDARD LEADS

millimeters (inches)

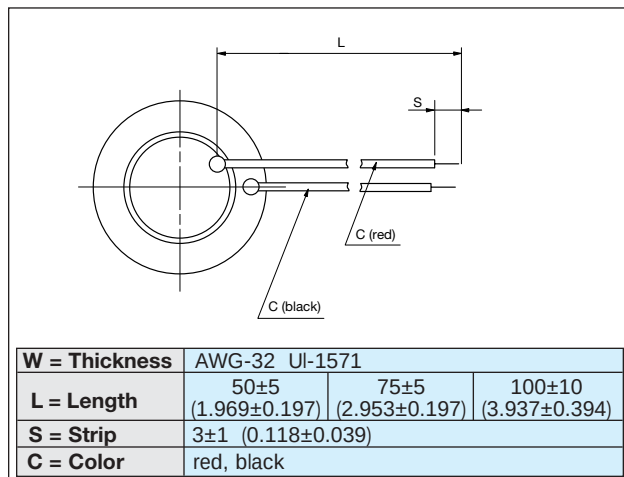

### FEATURES

- Wide variety of tones by connecting to IC
- Low current consumption, thin and light design
- High reliability and no contact noise

### APPLICATIONS

- Clocks, electronic calculators, pagers, cameras
- Equipment using microcontrollers (microwave ovens, TVs, stereos, automobiles, etc.)
- Telecommunications (facsimile machines, telephones)
- Electronic medical instruments

### HOW TO ORDER

KBS - 20 DA - 7 A □ -1

#### Option Spec

Lead-wire spec etc.

#### Metal

Blank = Brass

#### 2-Electrode Type

A = Element only

C = With lead

#### Resonant Frequency

#### Appearance

Disc-shaped buzzer

#### Diameter

#### Series

### SPECIFICATIONS

millimeters (inches)

| Part Number   | Resonant Frequency (kHz) | Resonant Impedance (Ω) | Static Capacitance (pF) | Dimensions                 |                            |                 |                            |                            | Metal Disc Material |
|---------------|--------------------------|------------------------|-------------------------|----------------------------|----------------------------|-----------------|----------------------------|----------------------------|---------------------|
|               |                          |                        |                         | Metal Disc (φA)            | Ceramic Disc (φB)          | Electrode (φC)  | Total Thickness (T)        | Metal Disc Thickness (t)   |                     |
| KBS-13DA-12A  | 12.0±1.2                 | 700                    | 5,000±30%               | 13.4±0.10<br>(0.528±0.004) | 10.0±0.30<br>(0.394±0.012) | 9.00<br>(0.354) | 0.36±0.10<br>(0.014±0.004) | 0.15±0.03<br>(0.006±0.001) | Brass               |
| KBS-15DA-9A-2 | 10.5±3.0                 | 600                    | 8,000±30%               | 15.0±0.10<br>(0.591±0.004) | 12.0±0.30<br>(0.472±0.012) | 11.0<br>(0.433) | 0.42±0.10<br>(0.017±0.004) | 0.20±0.03<br>(0.008±0.001) | Brass               |
| KBS-20DA-7A   | 6.6±1.0                  | 300                    | 10,000±30%              | 20.0±0.10<br>(0.787±0.004) | 14.2±0.30<br>(0.559±0.012) | 13.0<br>(0.512) | 0.45±0.10<br>(0.018±0.004) | 0.20±0.03<br>(0.008±0.001) | Brass               |
| KBS-23DA-4A   | 4.0±1.0                  | 600                    | 12,000±30%              | 22.8±0.10<br>(0.898±0.004) | 15.0±0.30<br>(0.591±0.012) | 14.0<br>(0.551) | 0.41±0.10<br>(0.016±0.004) | 0.15±0.03<br>(0.006±0.001) | Brass               |
| KBS-27DA-5A   | 4.6±0.5                  | 200                    | 20,000±30%              | 27.0±0.10<br>(1.063±0.004) | 20.2±0.30<br>(0.795±0.012) | 19.0<br>(0.748) | 0.53±0.10<br>(0.021±0.004) | 0.25±0.03<br>(0.010±0.001) | Brass               |
| KBS-30DA-1A   | 1.4±0.5                  | 500                    | *48,000±30%             | 30.0±0.10<br>(1.181±0.004) | 20.2±0.30<br>(0.795±0.012) | 19.0<br>(0.748) | 0.23±0.10<br>(0.009±0.004) | 0.10±0.03<br>(0.004±0.001) | Brass               |
| KBS-35DA-3A   | 2.9±0.5                  | 200                    | 30,000±30%              | 35.0±0.10<br>(1.378±0.004) | 25.0±0.30<br>(0.984±0.012) | 23.5<br>(0.925) | 0.53±0.10<br>(0.021±0.004) | 0.25±0.03<br>(0.010±0.001) | Brass               |


\*Measured at 120Hz, all others at 1kHz

# Piezo Ceramic Elements

## KBS Series




### DIMENSIONS

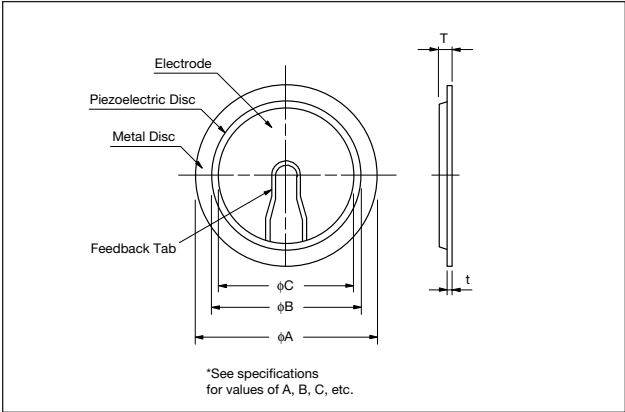

### STANDARD LEADS

millimeters (inches)

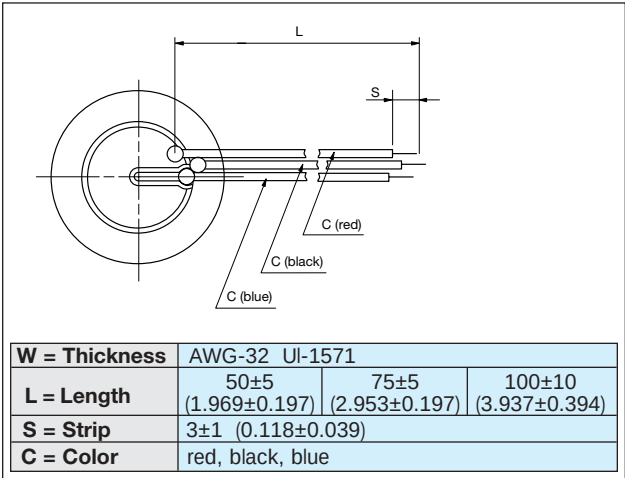

### FEATURES

- High sound pressure level and clear sound by connecting to a self oscillating circuit
- Thin and light design
- High reliability and no contact noise

### APPLICATIONS

- Smoke detectors, security alarms and other warning devices
- Pagers, electronic calculators, alarm signals
- Telephones

### HOW TO ORDER

**KBS - 35 DA - 3 G □ -3**

#### Option Spec

Lead-wire spec etc.

#### Metal Disc Material

□ = Brass  
S = Stainless Steel  
L = 42 Alloy

#### 3-Electrode Type

G = G-Pattern  
GC = G-Pattern with Leads

#### Resonant Frequency

#### Appearance

Disc-shaped buzzer

#### Diameter (mm)

#### Series

### SPECIFICATIONS (G TYPE)

millimeters (inches)

| Part Number | Resonant Frequency (kHz) | Resonant Impedance (Ω) | Static Capacitance (pF) | Dimensions                 |                            |                 |                            |                            | Metal Disc Material |
|-------------|--------------------------|------------------------|-------------------------|----------------------------|----------------------------|-----------------|----------------------------|----------------------------|---------------------|
|             |                          |                        |                         | Metal Disc (φA)            | Ceramic Disc (φB)          | Electrode (φC)  | Total Thickness (T)        | Metal Disc Thickness (t)   |                     |
| KBS-27DA-5G | 4.6±0.5                  | 200                    | 16,000±30%              | 27.0±0.10<br>(1.063±0.004) | 20.2±0.30<br>(0.795±0.012) | 19.0<br>(0.748) | 0.53±0.10<br>(0.021±0.004) | 0.25±0.03<br>(0.010±0.001) | Brass               |
| KBS-35DA-3G | 2.9±0.5                  | 200                    | 25,000±30%              | 35.0±0.10<br>(1.378±0.004) | 25.0±0.30<br>(0.984±0.012) | 23.6<br>(0.929) | 0.53±0.10<br>(0.021±0.004) | 0.25±0.03<br>(0.010±0.001) | Brass               |

# Piezo Buzzers



## KBS Series



### FEATURES

- Low current consumption - High sound pressure
- Compact, light design
- High reliability and no contact noise
- Easy-mounting
- Wide variety of tones can be made by cavity designing
- Functions over a wide range of Input Voltage

### APPLICATIONS

- Confirmation tone for various office automation equipment
- Automobiles, microwave ovens, refrigerators
- Clocks, toys, game machines

### HOW TO ORDER

**KBS - 27 DB - 3 A**

**Type of Terminals**

A = With lead P = Round pin

**Resonant Frequency**

**Appearance**

Buzzer with casing

**Diameter (mm)**

**Series**

### DIMENSIONS

millimeters (inches)

|                        |                          |                          |
|------------------------|--------------------------|--------------------------|
| <b>KBS-15DB-4A</b><br> | <b>KBS-13DB-4P-2</b><br> | <b>KBS-20DB-5A</b><br>   |
| <b>KBS-27DB-3A</b><br> | <b>KBS-20DB-2P-0</b><br> | <b>KBS-20DB-4P-0</b><br> |

### SPECIFICATIONS


| Part Number   | Sound Pressure Level              | Static Capacitance |
|---------------|-----------------------------------|--------------------|
| KBS-13DB-4P-2 | 73db min. 4.096kHz 10Vp-p SQ 30cm | 10nF±30%           |
| KBS-20DB-2P-0 | 75db min. 2.048kHz 10Vp-p SQ 30cm | 22nF±30%           |
| KBS-20DB-4P-0 | 77db min. 4.096kHz 10Vp-p SQ 30cm | 14nF±30%           |
| KBS-15DB-4A   | 72db min. 4.096kHz 10Vp-p SQ 30cm | 9.5nF±30%          |
| KBS-20DB-5A   | 75db min. 5.0kHz 10Vp-p SQ 30cm   | 10nF±30%           |
| KBS-27DB-3A   | 75db min. 5.0kHz 10Vp-p SQ 30cm   | 20nF±30%           |



# Trimmer Capacitors



## CTZ2, CTZ3 Series

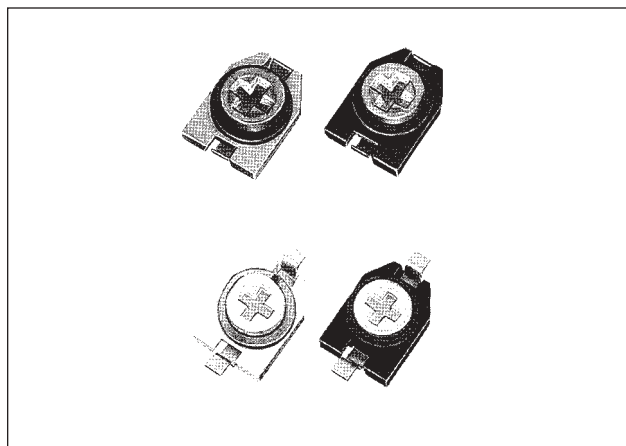

### FEATURES

- SMD small & thin package
- Wide capacitance range
- CTZ3S-A series-small setting drift
- Washable and non-washable types available
- Plus slot(+) suitable for auto-adjustment  
(Minus slot is also available)

### APPLICATIONS

- AV equipment
- Cellular phone
- Cordless phone
- Pager
- TCXO
- Keyless Entry

### SPECIFICATIONS

| Part Number |     | Capacitance (pF)          |            |        | Q<br>1±0.1<br>(MHz) | Temperature<br>Coefficient<br>(ppm/°C) |
|-------------|-----|---------------------------|------------|--------|---------------------|----------------------------------------|
|             |     | Max.<br>Value<br>-0%+100% | Min. Value |        |                     |                                        |
|             |     |                           | Standard   | A Type |                     |                                        |
| CTZ2<br>S/E | 03A | 3                         | 2.0        | —      | >150                | NP0±500                                |
|             | 05A | 5                         | 3.0        | —      | >150                | NP0±500                                |
|             | 10A | 10                        | 3.0        | —      | >150                | NP0±500                                |
|             | 20C | 20                        | 5.5        | —      | >150                | N750±500                               |
| CTZ3<br>S/E | 03A | 3                         | 1.0        | 1.5    | >300                | NP0±500                                |
|             | 05A | 5                         | 1.5        | 2.0    | >300                | NP0±500                                |
|             | 10A | 10                        | 2.5        | 4.0    | >300                | NP0±500                                |
|             | 10B | 10                        | 1.5        | 2.0    | >300                | N400±500                               |
|             | 20C | 20                        | 4.5        | 7.5    | >300                | N750±500                               |
|             | 30C | 30                        | 4.5        | —      | >300                | N750±500                               |
|             | 40C | 40                        | 4.5        | —      | >300                | N750±500                               |
|             | 50C | 50                        | 4.5        | —      | >200                | N750±500                               |

\*Standard Specification = Rated Voltage (VDC) 25  
 Temperature Range (°C) -40 to +85  
 Insulation Resistance (MΩ) > 10<sup>4</sup>  
 Torque (g-cm) 10 to 150

### HOW TO ORDER

CTZ3 S - 05 A - W 1 - P F

#### Lead Specification

F = Lead Forming Type (CTZ3 type)

#### Pin Head Type

P = Plus slot

#### Taping Quantity (Unit = pcs)

1 = 1,000 2 = 2,000 5 = 5,000

#### Packaging

B = Bulk

W = W Direction Taping refer to pg. 61

X = X Direction Taping refer to pg. 61

#### Temperature Coefficient (ppm/°C)

A = NP0±500 B = N400±500

C = N750±500

#### Maximum Capacitance

03 = 3pF 20 = 20pF 50 = 50pF

05 = 5pF 30 = 30pF

10 = 10pF 40 = 40pF

#### Type

S = Reflow non-washable type

E = Reflow washable type

#### Series

CTZ2 = 3.0mmx2.5mmx1.3mm max.

CTZ3 = 4.5mmx3.2mmx1.8mm max.

\*No code for standard parts


# Trimmer Capacitors




## CTZ2, CTZ3 Series

### SERIES


CTZ2






### Dimensions

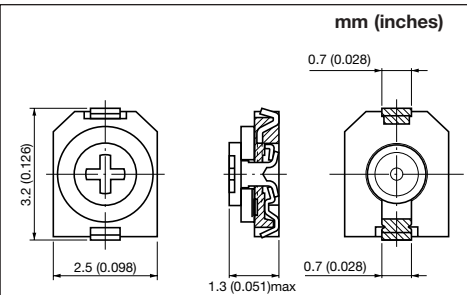

### Recommended Land Pattern



CTZ3

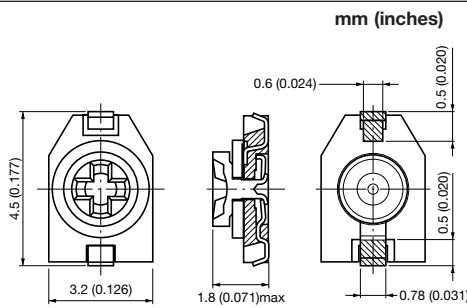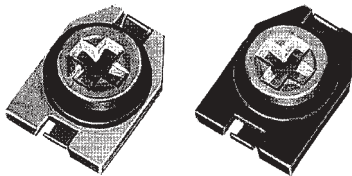


# Trimmer Capacitors

## CTZ2, CTZ3 Series



### TAPE AND REEL

millimeters (inches)

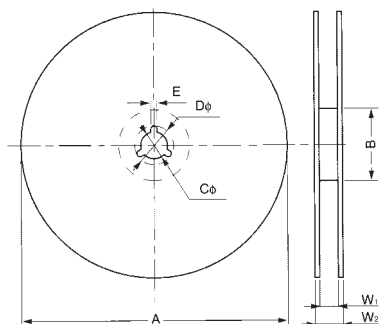


|                                | A                                                                                     | B                                                                                      | C                          | D                          | E                          | W <sub>1</sub>             | W <sub>2</sub>             |
|--------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| <b>CTZ2 Series (2,000 pcs)</b> | 180 <sup>+0.00</sup> <sub>-3.00</sub><br>(7.087 <sup>+0.000</sup> <sub>-0.118</sub> ) | 60.0 <sup>+1.00</sup> <sub>-0.00</sub><br>(2.362 <sup>+0.000</sup> <sub>-0.118</sub> ) | 13.0±0.20<br>(0.512±0.008) | 21.0±0.80<br>(0.827±0.031) | 2.00±0.50<br>(0.079±0.020) | 13.0±0.30<br>(0.512±0.012) | 15.4±1.00<br>(0.606±0.039) |
| <b>CTZ3 Series (1,000 pcs)</b> |                                                                                       |                                                                                        |                            |                            |                            |                            |                            |
| <b>CTZ3 Series (5,000 pcs)</b> | 420±2.00<br>(16.535±0.079)                                                            | 80.0±2.00<br>(3.150±0.079)                                                             | 13.0±0.50<br>(0.512±0.020) | 21.0±1.00<br>(0.827±0.039) | 2.00±0.50<br>(0.079±0.020) | 14.0±2.00<br>(0.551±0.079) | 16.0±2.50<br>(0.630±0.098) |

### CARRIER TAPE


millimeters (inches)

### TAPE LOADING

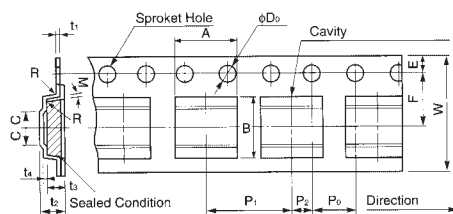


W Direction – Standard

X Direction – Option



→ Direction of feed  
W Direction — Standard



→ Direction of feed  
X Direction — Option


|            | CTZ2 Series                                                                            |                                                                                        | CTZ3 Series                                                                            |                                                                                        |
|------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| Code       | Standard                                                                               | Reverse                                                                                | Standard                                                                               | Reverse                                                                                |
| <b>A</b>   | 2.70±0.10<br>(0.106±0.004)                                                             | 2.90±0.10<br>(0.114±0.004)                                                             | 3.35±0.10<br>(0.132±0.004)                                                             | 3.60±0.10<br>(0.142±0.004)                                                             |
| <b>B</b>   | 3.20±0.10<br>(0.126±0.004)                                                             | 4.90±0.10<br>(0.193±0.004)                                                             | 4.60 <sup>+0.20</sup> <sub>-0.00</sub><br>(0.181 <sup>+0.008</sup> <sub>-0.000</sub> ) | 7.2±0.10<br>(0.283±0.004)                                                              |
| <b>W</b>   | 12.0±0.30<br>(0.472±0.012)                                                             | 12.0±0.30<br>(0.472±0.012)                                                             | 12.0±0.30<br>(0.472±0.012)                                                             | 12.0±0.30<br>(0.472±0.012)                                                             |
| <b>F</b>   | 5.50±0.05<br>(0.217±0.002)                                                             | 5.50±0.05<br>(0.217±0.002)                                                             | 5.50±0.05<br>(0.217±0.002)                                                             | 5.50±0.05<br>(0.217±0.002)                                                             |
| <b>E</b>   | 1.75±0.10<br>(0.069±0.004)                                                             | 1.75±0.10<br>(0.069±0.004)                                                             | 1.75±0.10<br>(0.069±0.004)                                                             | 1.75±0.10<br>(0.069±0.004)                                                             |
| <b>P0</b>  | 4.00±0.10<br>(0.157±0.004)                                                             | 4.00±0.10<br>(0.157±0.004)                                                             | 4.00±0.10<br>(0.157±0.004)                                                             | 4.00±0.10<br>(0.157±0.004)                                                             |
| <b>P1</b>  | 4.00±0.10<br>(0.157±0.004)                                                             | 4.00±0.10<br>(0.157±0.004)                                                             | 8.00±0.10<br>(0.315±0.004)                                                             | 8.00±0.10<br>(0.315±0.004)                                                             |
| <b>P2</b>  | 2.00±0.05<br>(0.079±0.002)                                                             | 2.00±0.05<br>(0.079±0.002)                                                             | 2.00±0.05<br>(0.079±0.002)                                                             | 2.00±0.05<br>(0.079±0.002)                                                             |
| <b>øD0</b> | 1.50 <sup>+0.10</sup> <sub>-0.00</sub><br>(0.059 <sup>+0.004</sup> <sub>-0.000</sub> ) | 1.50 <sup>+0.10</sup> <sub>-0.00</sub><br>(0.059 <sup>+0.004</sup> <sub>-0.000</sub> ) | 1.50 <sup>+0.10</sup> <sub>-0.00</sub><br>(0.059 <sup>+0.004</sup> <sub>-0.000</sub> ) | 1.50 <sup>+0.10</sup> <sub>-0.00</sub><br>(0.059 <sup>+0.004</sup> <sub>-0.000</sub> ) |
| <b>t1</b>  | 0.30±0.10<br>(0.012±0.004)                                                             | 0.30±0.10<br>(0.012±0.004)                                                             | 0.30±0.10<br>(0.012±0.004)                                                             | 0.30±0.10<br>(0.012±0.004)                                                             |
| <b>t2</b>  | 2.00±0.10<br>(0.079±0.004)                                                             | 1.50 <sup>+0.20</sup> <sub>-0.00</sub><br>(0.059 <sup>+0.008</sup> <sub>-0.000</sub> ) | 2.50±0.10<br>(0.098±0.004)                                                             | 2.20±0.10<br>(0.087±0.004)                                                             |
| <b>t3</b>  | 1.30 <sup>+0.15</sup> <sub>-0.00</sub><br>(0.051 <sup>+0.006</sup> <sub>-0.000</sub> ) | 0.80 <sup>+0.10</sup> <sub>-0.00</sub><br>(0.031 <sup>+0.004</sup> <sub>-0.000</sub> ) | 2.00±0.10<br>(0.079±0.004)                                                             | 1.00±0.10<br>(0.039±0.004)                                                             |
| <b>t4</b>  | 0.30±0.10<br>(0.012±0.004)                                                             | —                                                                                      | 0.30±0.05<br>(0.012±0.002)                                                             | —                                                                                      |
| <b>C</b>   | 2.06±0.10<br>(0.081±0.004)                                                             | 2.50±0.10<br>(0.098±0.004)                                                             | 2.70±0.10<br>(0.106±0.004)                                                             | 2.00±0.10<br>(0.079±0.004)                                                             |

# Trimmer Capacitors



## CTZ2, CTZ3 Series


### FREQUENCY CHARACTERISTICS

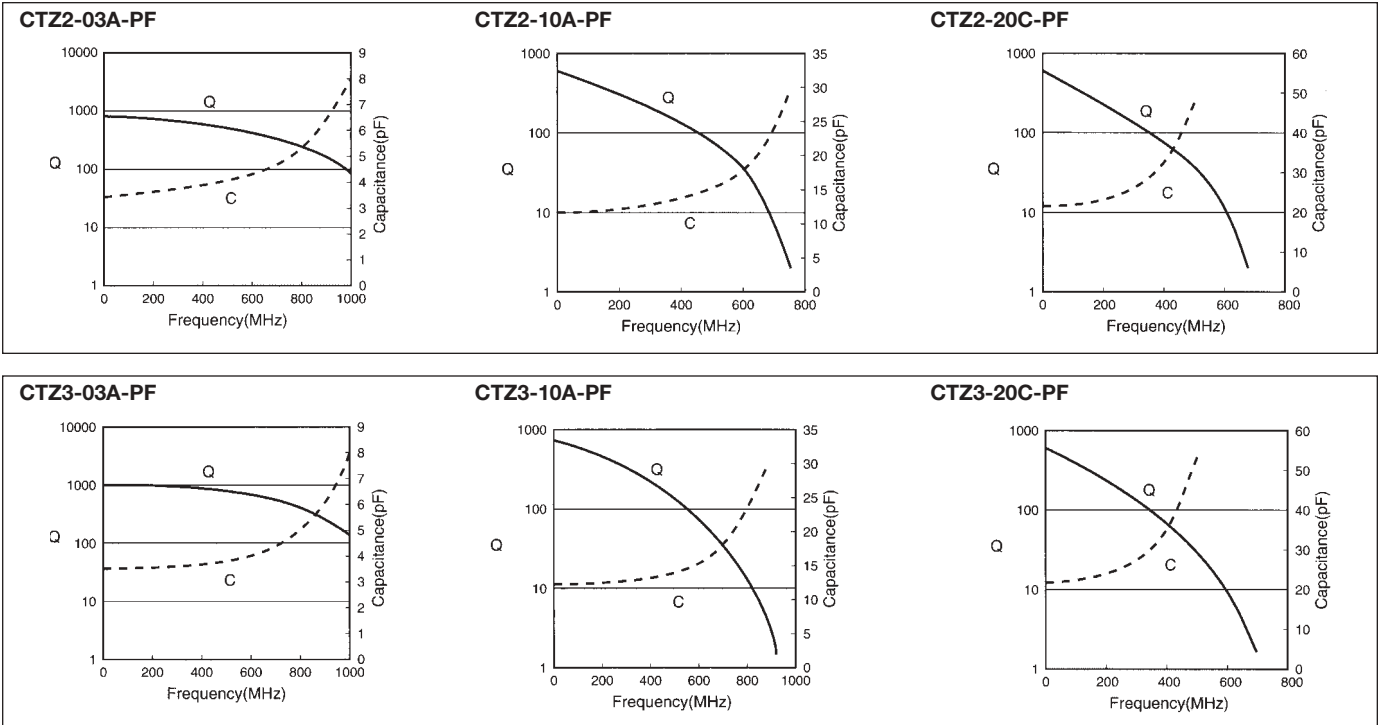

# Trimmer Capacitors




## TSR, TSW, TSF Series

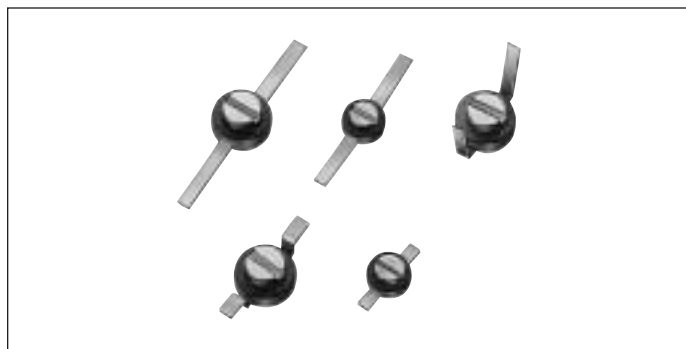


### DIMENSIONS

3 $\phi$  Type

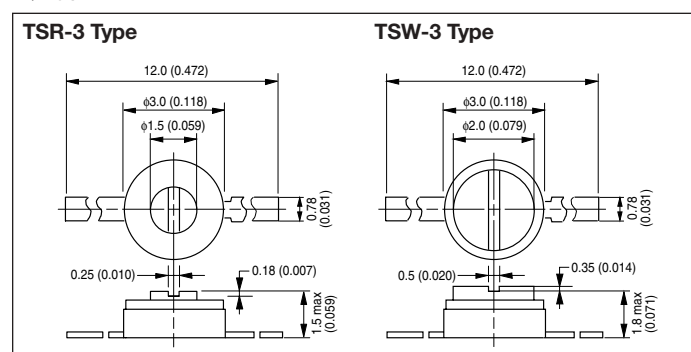

2 $\phi$  Type

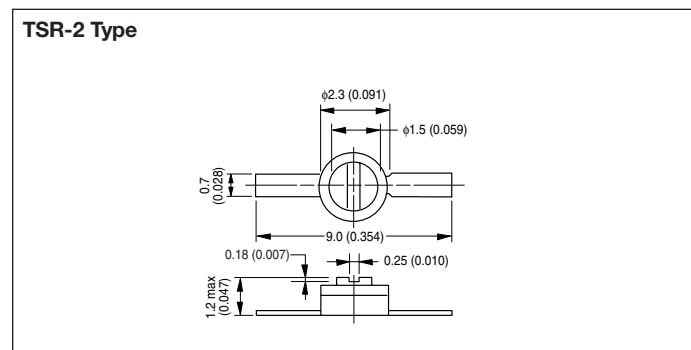

### SPECIFICATIONS

| Part Number  | Capacitance Range Mark | Capacitance Range Mark (pF) | Part Number | Thickness Marking |     |     | TC (ppm/°C) | Q Factor (1±0.1MHz) | Slot Dimension                                                                                               |          |                                                |
|--------------|------------------------|-----------------------------|-------------|-------------------|-----|-----|-------------|---------------------|--------------------------------------------------------------------------------------------------------------|----------|------------------------------------------------|
|              |                        |                             |             | 120               | 150 | 180 |             |                     |                                                                                                              |          |                                                |
| TSR3<br>TSW3 | Z                      | 1 to 3                      | TSW3        | —                 | —   | O   | NP0±300     | TSR3≥150            | TSR3<br>Normal Slot<br>Width = 0.25<br>Depth = 0.18<br><br>TSW3<br>Wide Slot<br>Width = 0.50<br>Depth = 0.35 |          |                                                |
|              | P                      | 1.5 to 5                    | TSW3        | —                 | —   | O   |             |                     |                                                                                                              |          |                                                |
|              | SP                     | 1.5 to 10                   | TSW3        | —                 | —   | O   |             |                     |                                                                                                              |          |                                                |
|              | H                      | 2.5 to 10                   | TSW3        | —                 | —   | O   |             |                     |                                                                                                              |          |                                                |
|              | S3                     | 5.0 to 20                   | TSR3        | —                 | O   | —   | N750±500    | TSW3≥200            |                                                                                                              |          |                                                |
|              |                        |                             | TSW3        | —                 | —   | O   |             |                     |                                                                                                              |          |                                                |
|              | S2                     | 5.0 to 25                   | TSR3        | —                 | O   | —   |             |                     |                                                                                                              |          |                                                |
|              |                        |                             | TSW3        | —                 | —   | O   |             |                     |                                                                                                              |          |                                                |
|              | S                      | 5.0 to 30                   | TSR3        | —                 | O   | —   |             |                     |                                                                                                              |          |                                                |
|              |                        |                             | TSW3        | —                 | —   | O   |             |                     |                                                                                                              |          |                                                |
|              | □                      | 5.0 to 35                   | TSR3        | —                 | O   | —   |             |                     |                                                                                                              |          |                                                |
|              |                        |                             | TSW3        | —                 | —   | O   |             |                     |                                                                                                              |          |                                                |
|              | L                      | 5.0 to 40                   | TSR3        | —                 | O   | —   |             |                     |                                                                                                              |          |                                                |
|              |                        |                             | TSW3        | —                 | —   | O   |             |                     |                                                                                                              |          |                                                |
| TSF2         | L                      | 5.0 to 20                   | TSF2        | O                 | —   | —   |             |                     | N1200±800                                                                                                    | TSF2≥100 | TSF2 Normal Slot<br>Width = 0.25, Depth = 0.18 |
|              | L2                     | 5.0 to 25                   |             |                   |     |     |             |                     |                                                                                                              |          |                                                |

### FEATURES

- Ultra small and wide capacitance range
- Small  $\Delta C$  after alcohol washing
- Better cost performance with Ag plated lead available
- Wide slot type adjustable by using nonconductive trimming driver

### APPLICATIONS

- Watch
- Ultra miniature radio
- Telecommunication
- Ultra small video tuner
- Cordless phone
- Pager

### HOW TO ORDER

TSR 3 S - 150 - AU

Lead Forming Type

Thickness Dimensions

|     |       |           |
|-----|-------|-----------|
| 120 | 1.2mm | TSF2 Type |
| 150 | 1.5mm | TSR3 Type |
| 180 | 1.8mm | TSW3 Type |

Capacitance Range

Diameter Indication

3 = 3 $\phi$  Type      2 = 2 $\phi$  Type

Series

TSR Series

TSF Series





TSW Series

# Trimmer Capacitors




## TSR, TSW, TSF Series

### LEAD-FORMING TYPE

| Series                                                                             |      | Dimensions mm (inches)    |                           |                           | Configuration                                                                        |
|------------------------------------------------------------------------------------|------|---------------------------|---------------------------|---------------------------|--------------------------------------------------------------------------------------|
|                                                                                    |      | H                         | B                         | L                         |                                                                                      |
|   | TSF2 | —                         | —                         | 9.0±1.0<br>(0.354±0.039)  |   |
|                                                                                    | TSR3 | —                         | —                         | 12.0±1.0<br>(0.472±0.039) |                                                                                      |
|                                                                                    | TSW3 | —                         | —                         | 12.0±1.0<br>(0.472±0.039) |                                                                                      |
|   | TSF2 | 0.35±0.2<br>(0.014±0.008) | 2.85±0.3<br>(0.112±0.012) | 4.80±0.3<br>(0.189±0.012) |   |
|   | TSW3 | 3.65±0.5<br>(0.144±0.020) | 5.0±0.5<br>(0.197±0.020)  | —                         |   |
|  | TSW3 | 3.65±0.5<br>(0.144±0.020) | 5.0±0.5<br>(0.197±0.020)  | —                         |  |

### CHARACTERISTICS

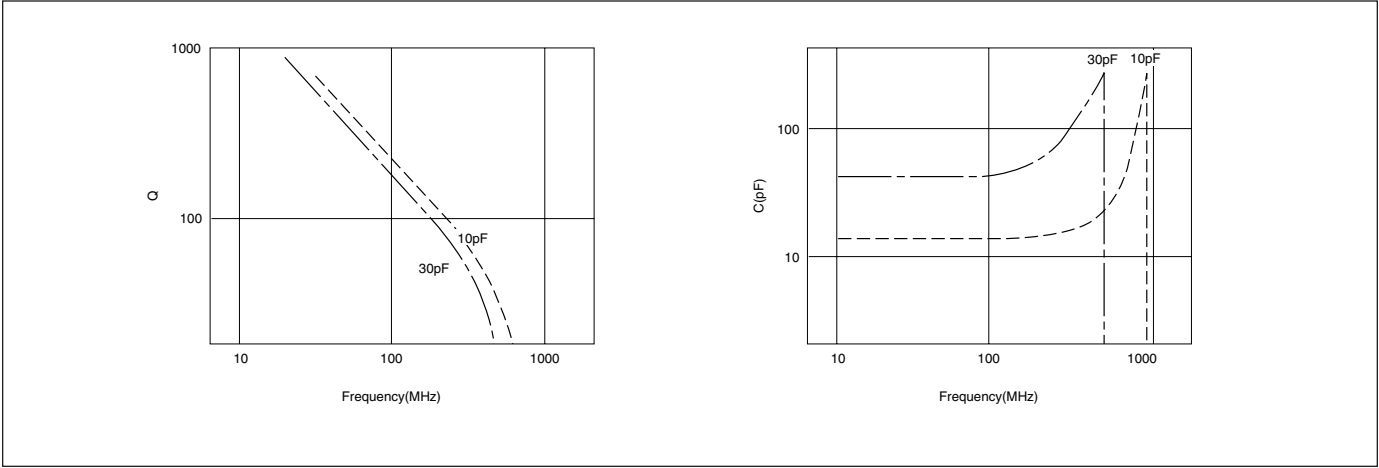


## PCB MOUNTING

- Please use mounting hole suitable for lead dimension of trimmer capacitor.
- When our recommended land pattern is not used, please check mounting alignment.
- When mounting on PCB, please do not apply pressure to trimmer capacitors over 500g.f.

## SOLDERING

- When using soldering iron, adjust iron tip to 280°C.
- Please find below recommended solder profile.

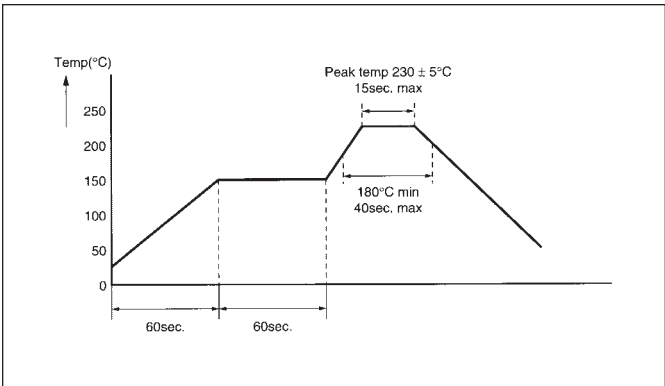

## STORAGE CONDITIONS

- Please do not store chlorine and sulfides in same atmosphere.
- Storage life 6 months.

## SCREWDRIVERS

Please use proper screwdriver for adjustment of the capacitor. Kyocera can supply suitable ceramic type screwdrivers specially designed for the use of CTZ series. Please contact your local AVX office for the details.

### CTZ-3


#### Pin Head

- ⊕ = CTZ-3 Plus Ceramic Driver
- ⊖ = CTZ-3 Minus Ceramic Driver

### CTZ-2

#### Pin Head

- ⊕ = CTZ-2 Plus Ceramic Driver
- ⊖ = CTZ-2 Minus Ceramic Driver

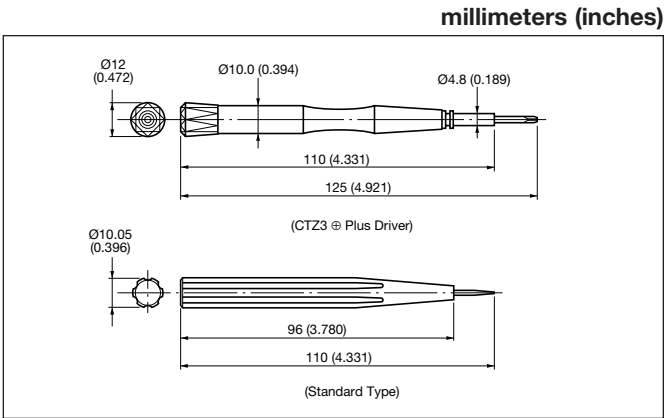

## DRIVER HEAD TYPE

millimeters (inches)

|                          |                          |
|--------------------------|--------------------------|
| <p><b>CTZ3 Plus</b></p>  | <p><b>CTZ2 Plus</b></p>  |
| <p><b>CTZ3 Minus</b></p> | <p><b>CTZ2 Minus</b></p> |

**For additional information  
on these products and  
continuing updates  
visit our Website**

**<http://www.avxcorp.com>**



## USA

### AVX Myrtle Beach, SC Corporate Offices

Tel: 843-448-9411  
FAX: 843-626-5292

### AVX Northwest, WA

Tel: 360-669-8746  
FAX: 360-699-8751

### AVX North Central, IN

Tel: 317-848-7153  
FAX: 317-844-9314

### AVX Mid/Pacific, MN

Tel: 952-974-9155  
FAX: 952-974-9179

### AVX Southwest, AZ

Tel: 480-539-1496  
FAX: 480-539-1501

### AVX South Central, TX

Tel: 972-669-1223  
FAX: 972-669-2090

### AVX Southeast, NC

Tel: 919-878-6223  
FAX: 919-878-6462

### AVX Canada

Tel: 905-564-8959  
FAX: 905-564-9728

## EUROPE

### AVX Limited, England European Headquarters

Tel: ++44 (0) 1252 770000  
FAX: ++44 (0) 1252 770001

### AVX S.A., France

Tel: ++33 (1) 69.18.46.00  
FAX: ++33 (1) 69.28.73.87

### AVX GmbH, Germany - AVX

Tel: ++49 (0) 8131 9004-0  
FAX: ++49 (0) 8131 9004-44

### AVX GmbH, Germany - Elco

Tel: ++49 (0) 2741 2990  
FAX: ++49 (0) 2741 299133

### AVX srl, Italy

Tel: ++390 (0)2 614571  
FAX: ++390 (0)2 614 2576

### AVX Czech Republic, s.r.o.

Tel: ++420 (0)467 558340  
FAX: ++420 (0)467 558345

## ASIA-PACIFIC

### AVX/Kyocera, Singapore Asia-Pacific Headquarters

Tel: (65) 258-2833  
FAX: (65) 350-4880

### AVX/Kyocera, Hong Kong

Tel: (852) 2-363-3303  
FAX: (852) 2-765-8185

### AVX/Kyocera, Korea

Tel: (82) 2-785-6504  
FAX: (82) 2-784-5411

### AVX/Kyocera, Taiwan

Tel: (886) 2-2696-4636  
FAX: (886) 2-2696-4237

### AVX/Kyocera, China

Tel: (86) 21-6249-0314-16  
FAX: (86) 21-6249-0313

### AVX/Kyocera, Malaysia

Tel: (60) 4-228-1190  
FAX: (60) 4-228-1196

### Elco, Japan

Tel: 045-943-2906/7  
FAX: 045-943-2910

### Kyocera, Japan - AVX

Tel: (81) 75-604-3426  
FAX: (81) 75-604-3425

### Kyocera, Japan - KDP

Tel: (81) 75-604-3424  
FAX: (81) 75-604-3425

Contact:



<http://www.avxcorp.com>

S-KEC0M0502-C