

## VC-MP-A2

Order No.: 1884416

The illustration shows version VC-MP-A3

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1884416>

Panel mounting base, made of metal, powder-coated type 2, number  
of modules 3, cable screw connection Pg21

### Commercial data

|                          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918164447      |
| Pack                     | 5 pcs.             |
| Customs tariff           | 85389099           |
| Weight/Piece             | 0.436 KG           |
| Catalog page information | Page 370 (PC-2009) |

### Product notes

WEEE/RoHS-compliant since:  
12/04/2006



[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

**Technical data****General characteristics**


|                                 |                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------|
| Note                            | When using fiber optics, the bending radii of the cable manufacturers must be observed. |
| Design                          | VC2                                                                                     |
| Degree of protection            | IP65/IP66/IP67                                                                          |
| Type of the screw connection    | 1x Pg21                                                                                 |
| Pg screw connection             | None                                                                                    |
| Height                          | 55 mm                                                                                   |
| Number of module slots          | 3                                                                                       |
| Housing material                | Zinc die-cast                                                                           |
| Housing surface material        | Powder coating                                                                          |
| Seal material                   | EPDM                                                                                    |
| Ambient temperature (operation) | -40 °C ... 125 °C                                                                       |

**Accessories**

| Item           | Designation | Description                                                                                  |
|----------------|-------------|----------------------------------------------------------------------------------------------|
| <b>Marking</b> |             |                                                                                              |
| 1852875        | VC-BZS WH   | Marker labels, unprinted, 5-section, for individual labeling with M-PEN or CMS system, white |

## Diagrams/Drawings

### Dimensioned drawing

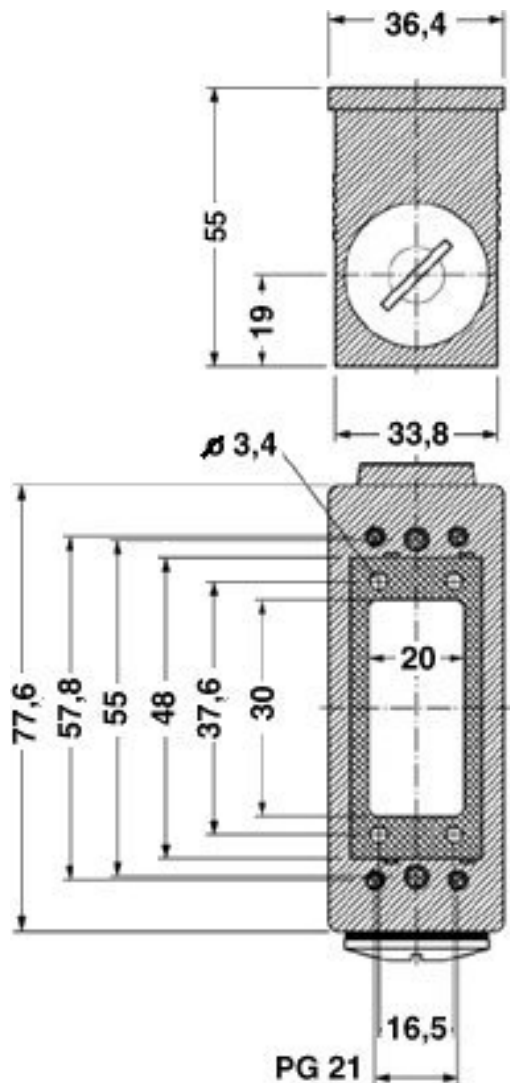

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;