

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary



18 GHz    SMA    N/O    S.P.6 T. SWITCH

OPTIONS :

### RF CHARACTERISTICS

NUMBER OF WAYS : 6  
FREQUENCY RANGE : 0 - 18 GHz  
IMPEDANCE : 50 Ohms

| FREQUENCY (GHz) | 0 - 3   | 3 - 8   | 8 -12.4 | 12.4- 18 |
|-----------------|---------|---------|---------|----------|
| V.S.W.R <=      | 1.20    | 1.30    | 1.40    | 1.50     |
| INSERT. LOSS <= | 0.20 dB | 0.30 dB | 0.40 dB | 0.50 dB  |
| ISOLATION >=    | 80 dB   | 70 dB   | 60 dB   | 60 dB    |
| AVER. POWER (*) | 240 W   | 150 W   | 120 W   | 100 W    |

### ELECTRICAL CHARACTERISTICS

ACTUATOR : NORMALLY OPEN  
NOMINAL CURRENT AT 25° C (±10%) : 102 mA  
ACTUATOR VOLTAGE (Vcc) : 28V (24 to 30V) / POSITIVE COMMON  
TERMINALS : 25 pins D-SUB male connector

### MECHANICAL CHARACTERISTICS

CONNECTORS : SMA female per MIL C 39012  
LIFE : 5.000.000 cycles per position  
SWITCHING TIME (nominal voltage;25° C) : < 15 ms  
CONSTRUCTION : splashproof  
WEIGHT : < 220 g

### ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -40 , +85  
STORAGE TEMPERATURE RANGE (°C) : -55 , +85

(\* : average power at 25° C per RF path)


4113-9212 This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

DRAWING


General tolerance:  $\pm 0,5$  mm

R573 403615

Page  
2/2

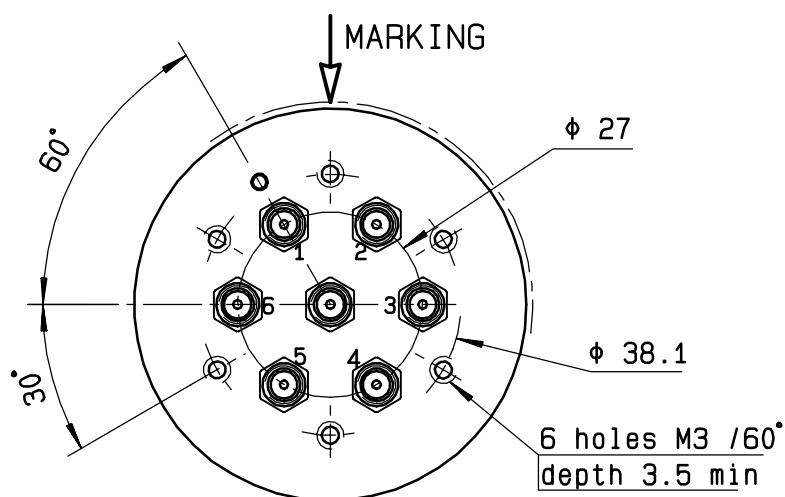


| Voltage | RF continuity          |
|---------|------------------------|
| +C -1   | IN $\leftrightarrow$ 1 |
| +C -2   | IN $\leftrightarrow$ 2 |
| +C -3   | IN $\leftrightarrow$ 3 |
| +C -4   | IN $\leftrightarrow$ 4 |
| +C -5   | IN $\leftrightarrow$ 5 |
| +C -6   | IN $\leftrightarrow$ 6 |

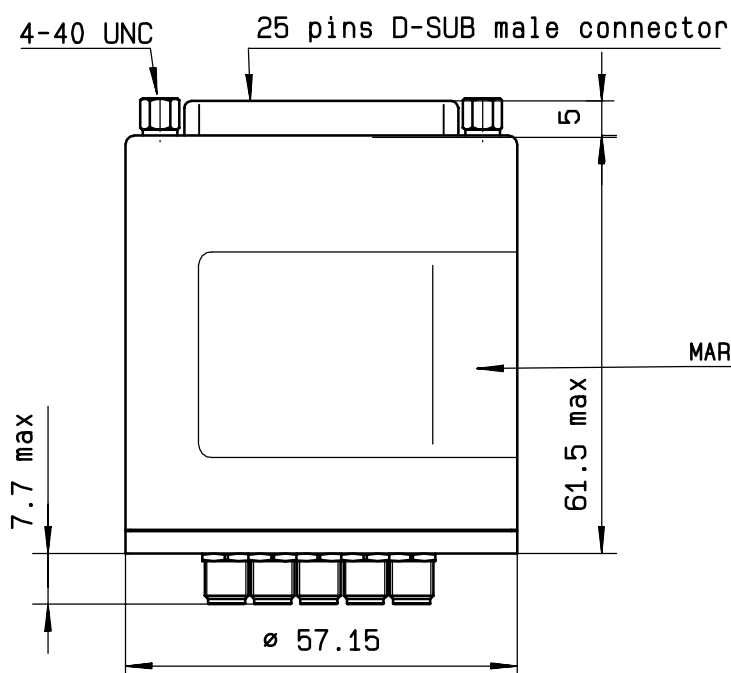


MARKING

TOP VIEW (TERMINALS)

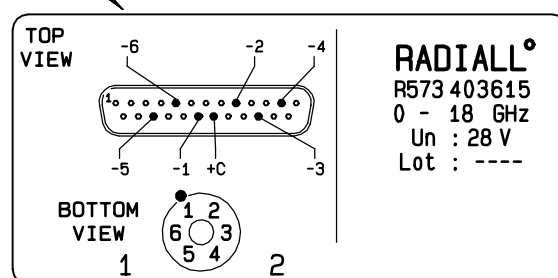

SCHEMATIC DIAGRAM

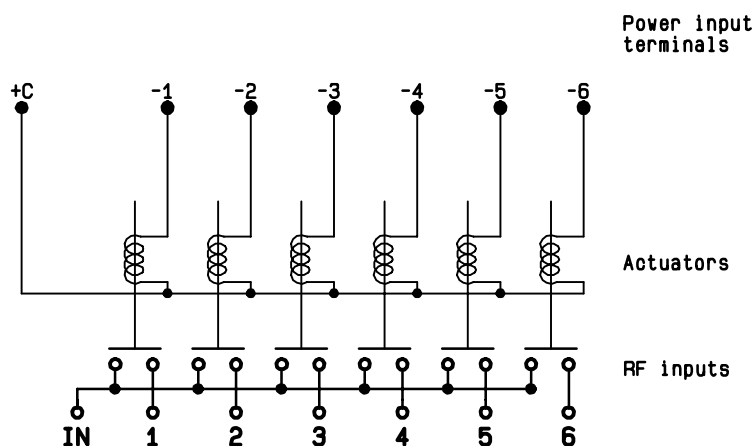

ISSUE 22.Jan.08