

5 4 3 2 1

Mating face according to MIL-C-24308 / DIN 40 652 / CECC 75301-802

No.1 contact

1,21

15,75 max


2,41

No.78 contact

4-40 UNC thread

2x1,04=2,08

2x3,12=6,24

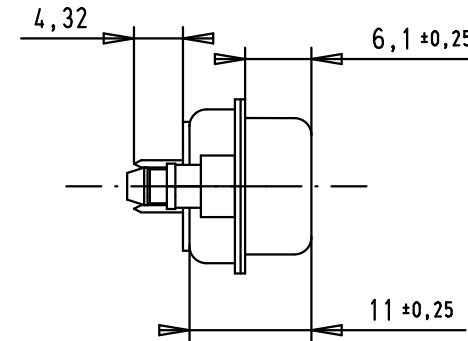

Printed board layout, component side
PCB thickness 1,6mm

∅0,6

1,15 max

6

61,1 ±0,1

67,3 max

61,1 ±0,13

No.1 contact

1,21 ±0,05

2,41 ±0,05

∅3,1 ±0,1

∅1,02 ±0,1


2,08 ±0,05

6,24 ±0,05

No.78 contact

36182	13/10/10	BH
33789	20/07/06	PK
33088	05/09/05	JMDR
32735	18/03/05	AL
32326	03/01/05	TR
31874	05/03/04	A.C.
31503	03/06/03	S.H.
Mod.	Dat.	Name

HARTING EURL
F-95972 Paris



All Dim. in mm
Orig. Size DIN A 4

Dsub, 78 poles, male,
straight solder pins,
board locks,
shell with dimples

Maßstab/
Scale

1.5:1

TB 09 56 561 x712

Blatt/ Page

1/1

09565615712	0.76 µm Au
09565617712	3
Part number	Performance level