

4112-9212 This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary



**50 Ω TERMINATED 12.4 GHz SMA N/O S.P.12T. SWITCH**

Page  
1 / 2

OPTIONS: / TTL DRIVE / SUPP.DIODES

### RF CHARACTERISTICS

NUMBER OF WAYS : 12  
FREQUENCY RANGE : 0 - 12.4 GHz  
IMPEDANCE : 50 Ohms

|                 |         |         |          |
|-----------------|---------|---------|----------|
| FREQUENCY (GHz) | 0 - 3   | 3 - 8   | 8 - 12.4 |
| V.S.W.R. <=     | 1.20    | 1.40    | 1.80     |
| INSERT. LOSS <= | 0.20 dB | 0.35 dB | 0.70 dB  |
| ISOLATION >=    | 80 dB   | 70 dB   | 60 dB    |
| AVER. POWER (*) | 240 W   | 150 W   | 120 W    |

TERMINATION IMPEDANCE : 50 Ohms  
TERMINATION AVG. POWER AT 25° C : 1 W per termination  
3 W total power

### ELECTRICAL CHARACTERISTICS

ACTUATOR : NORMALLY OPEN  
NOMINAL CURRENT AT 25° C (±10%) : 250 mA  
ACTUATOR VOLTAGE (Vcc) : 12V (10.2 to 13V) / NEGATIVE COMMON  
TERMINALS : 44 pins D-SUB male connector  
TTL INPUTS (E) - High level : 2.2 to 5.5V / 800µA at 5V  
- Low level : 0 to 0.8V / 20µA at 0.8V

### MECHANICAL CHARACTERISTICS

CONNECTORS : SMA female per MIL-C 39012  
LIFE : 2.000.000 cycles per position  
SWITCHING TIME (nominal voltage; 25° C) : < 15 ms  
CONSTRUCTION : splashproof  
WEIGHT : < 400 g

### ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -40 , +85  
STORAGE TEMPERATURE RANGE (°C) : -55 , +85

(\* : average power at 25° C per RF path)



This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

## DRAWING

General tolerance:  $\pm 0,5$  mm

# R574 402.225


Page  
2/2

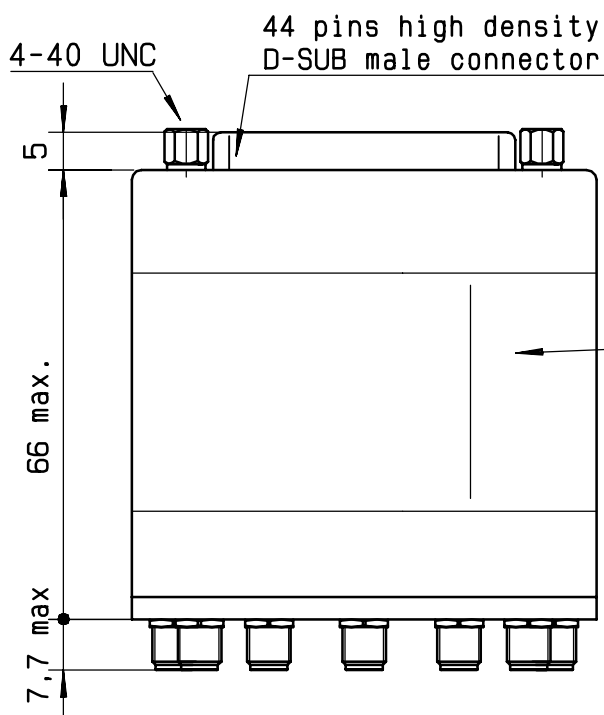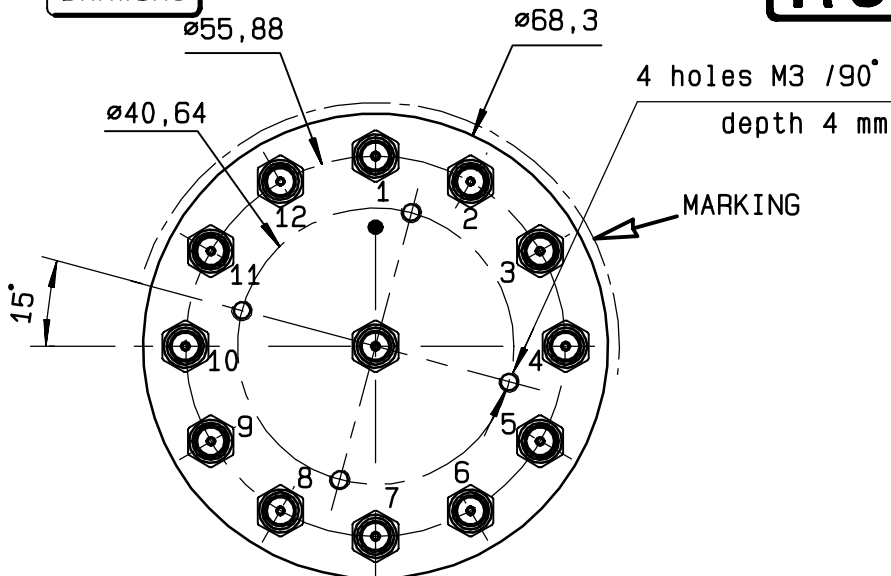


| TTL input | RF continuity |
|-----------|---------------|
| E1 = 1    | IN ↔ 1        |
| E2 = 1    | IN ↔ 2        |
| E3 = 1    | IN ↔ 3        |
| E4 = 1    | IN ↔ 4        |
| E5 = 1    | IN ↔ 5        |
| E6 = 1    | IN ↔ 6        |
| E7 = 1    | IN ↔ 7        |
| E8 = 1    | IN ↔ 8        |
| E9 = 1    | IN ↔ 9        |
| E10 = 1   | IN ↔ 10       |
| E11 = 1   | IN ↔ 11       |
| E12 = 1   | IN ↔ 12       |

MARKING

TOP VIEW (TERMINALS)

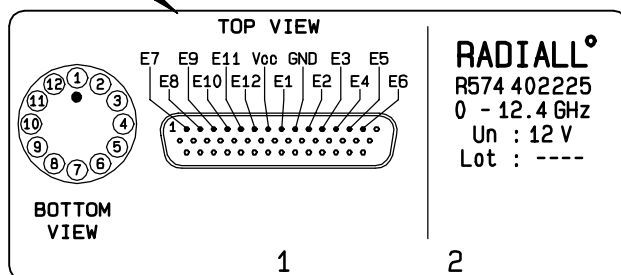

## SCHEMATIC DIAGRAM

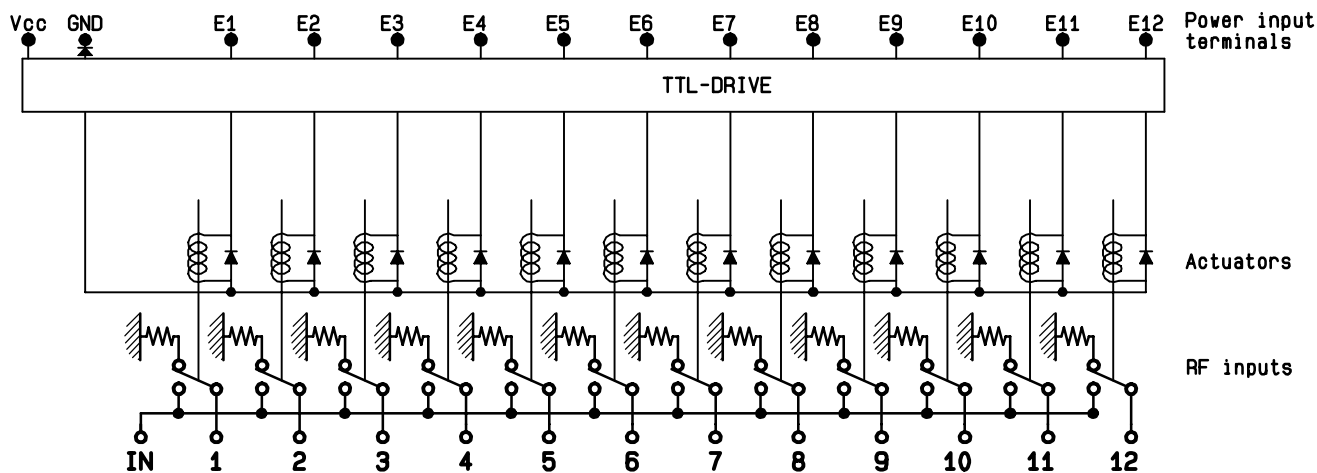

ISSUE 22. Jan. 08