


LOC	DIST	REVISIONS					
		REV	LTR	DESCRIPTION	DATE	DWN	APVD
CM	53	AD3	REVISED	PER ECR-17-008392	23JUN2017	BW	KR

D


C

B


A

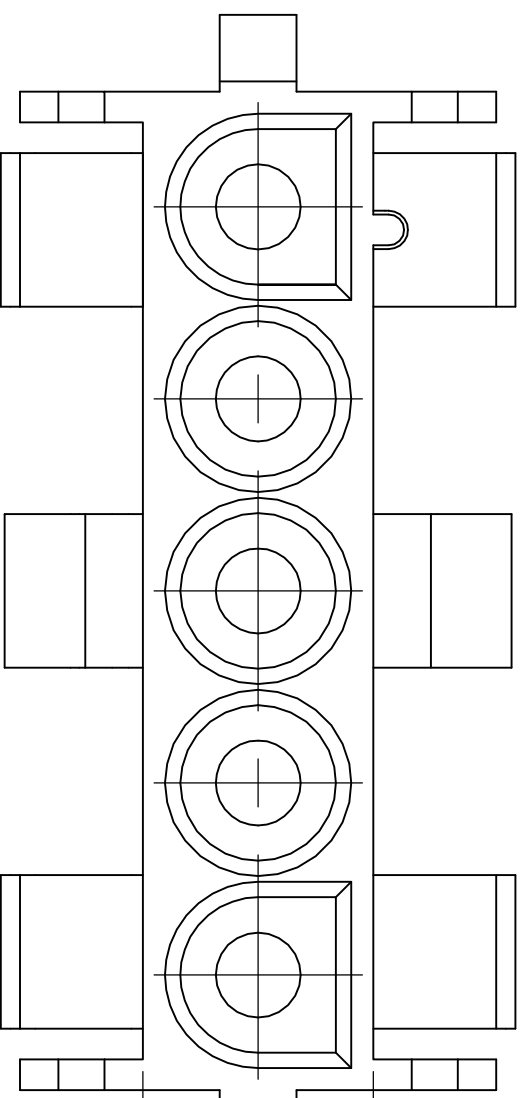


7.62

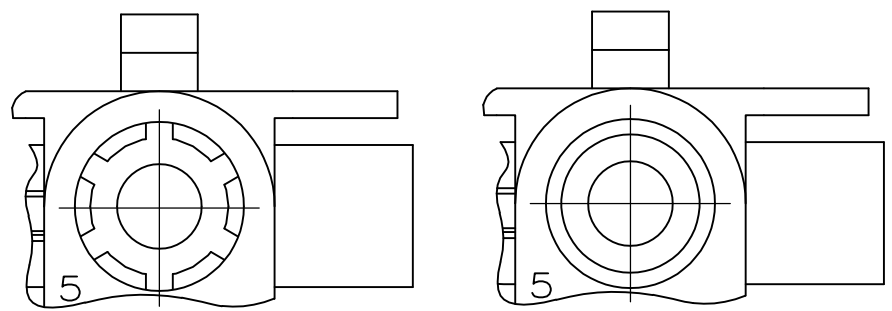

DETAIL E
OPTIONAL CONSTRUCTION

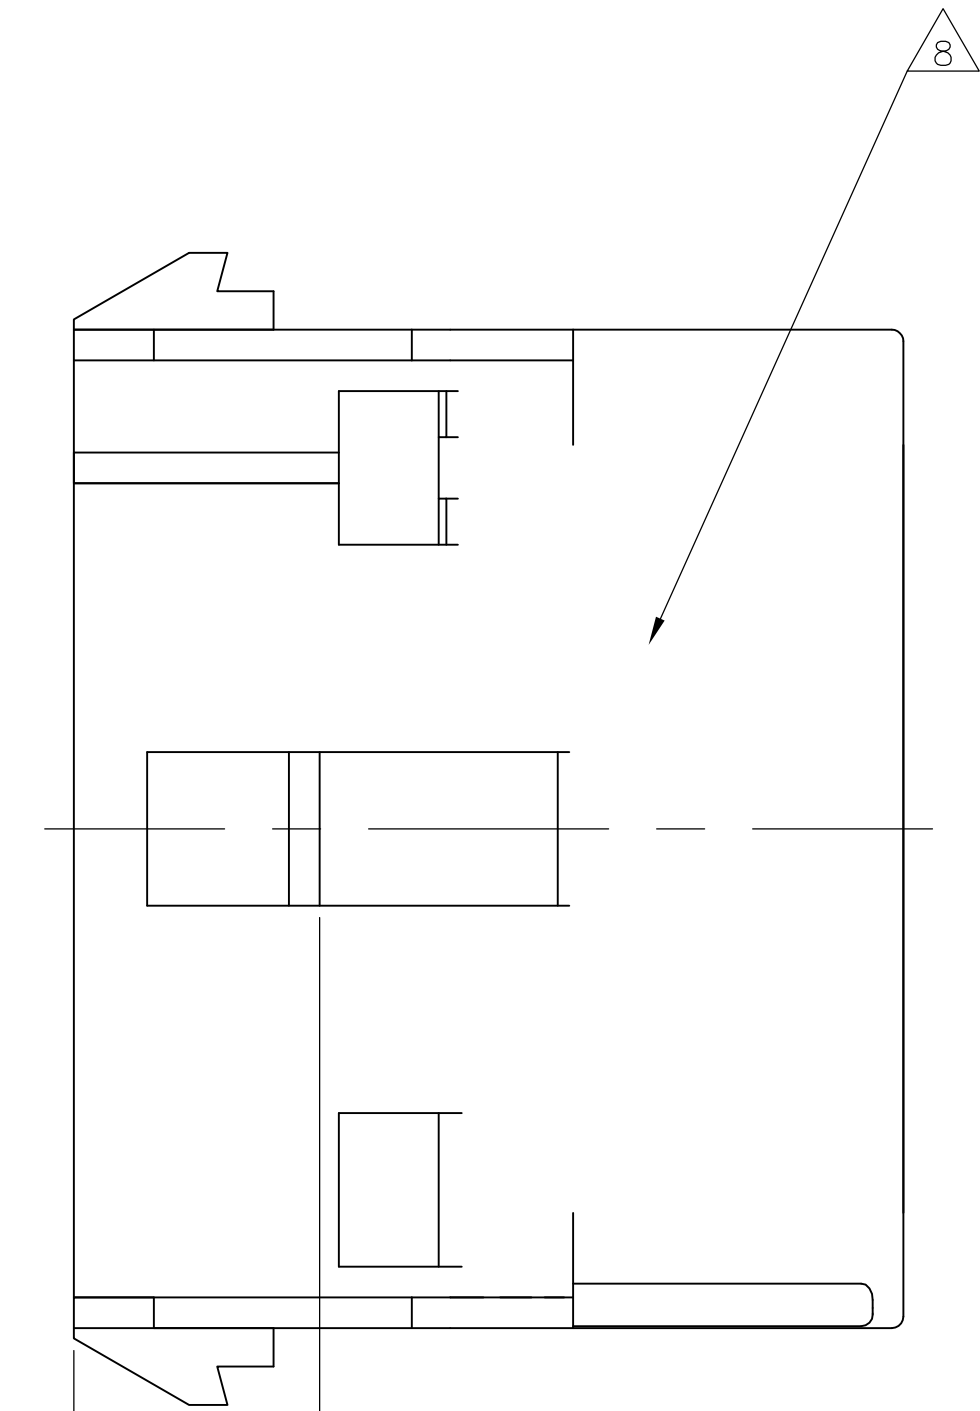


8.13±0.25

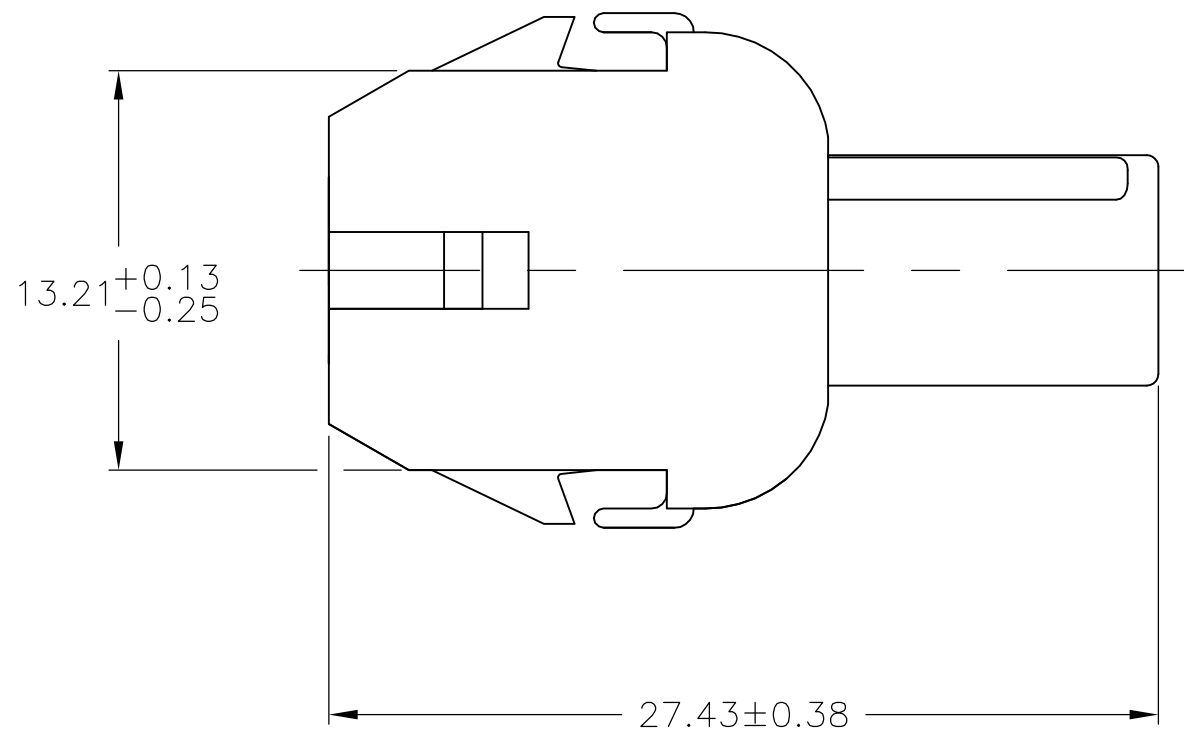


13.21+0.13/-0.25


27.43±0.38

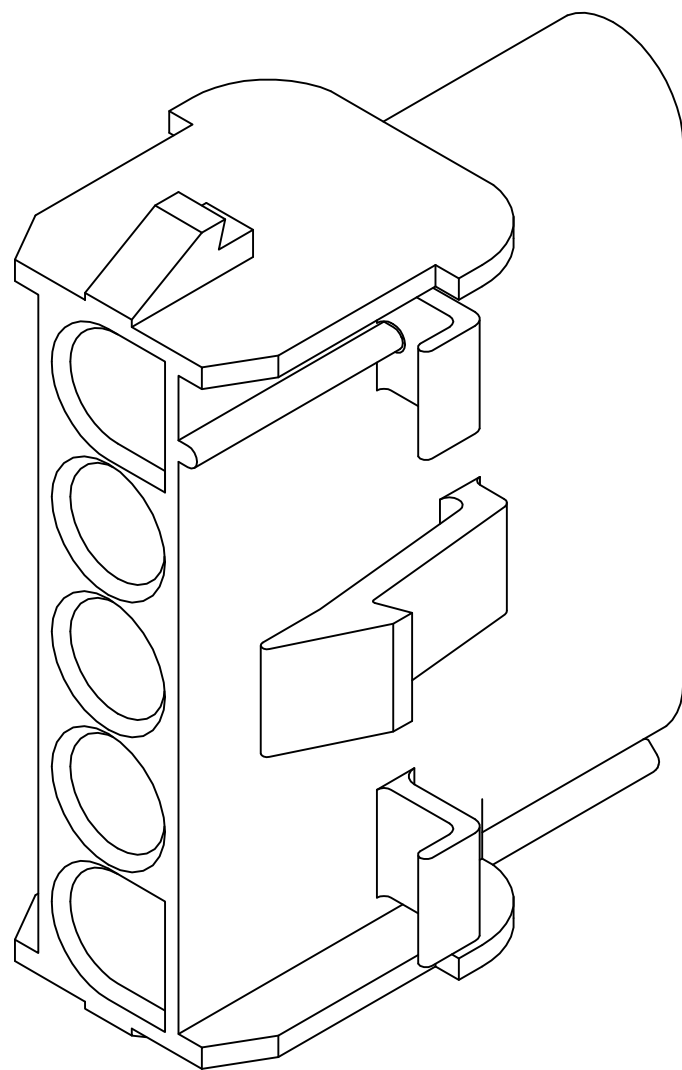

3-DIMENSIONAL MODEL
NTS

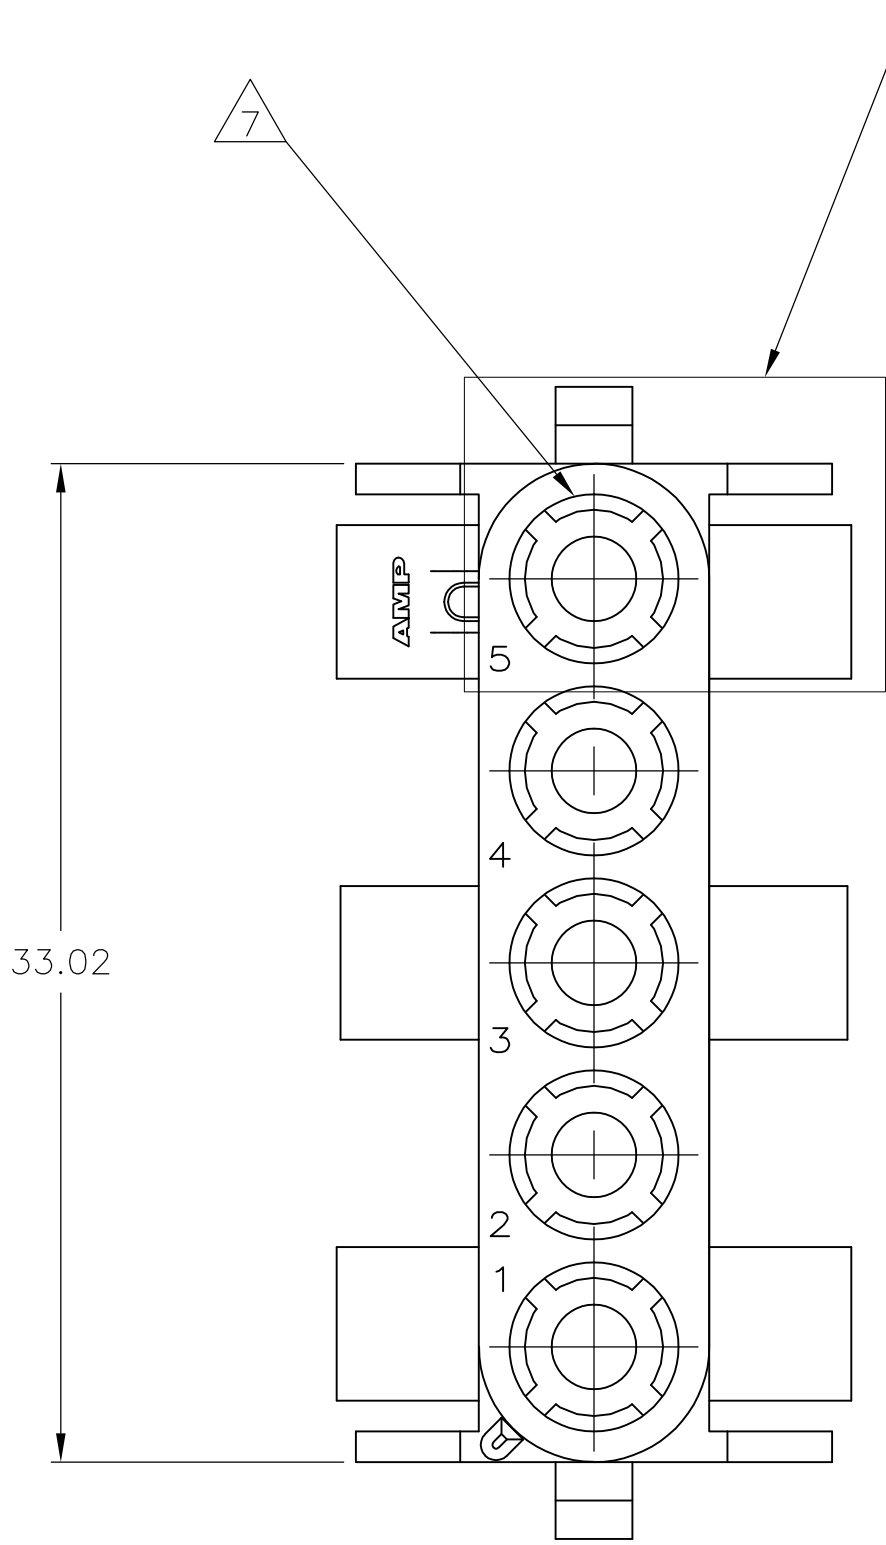

33.02

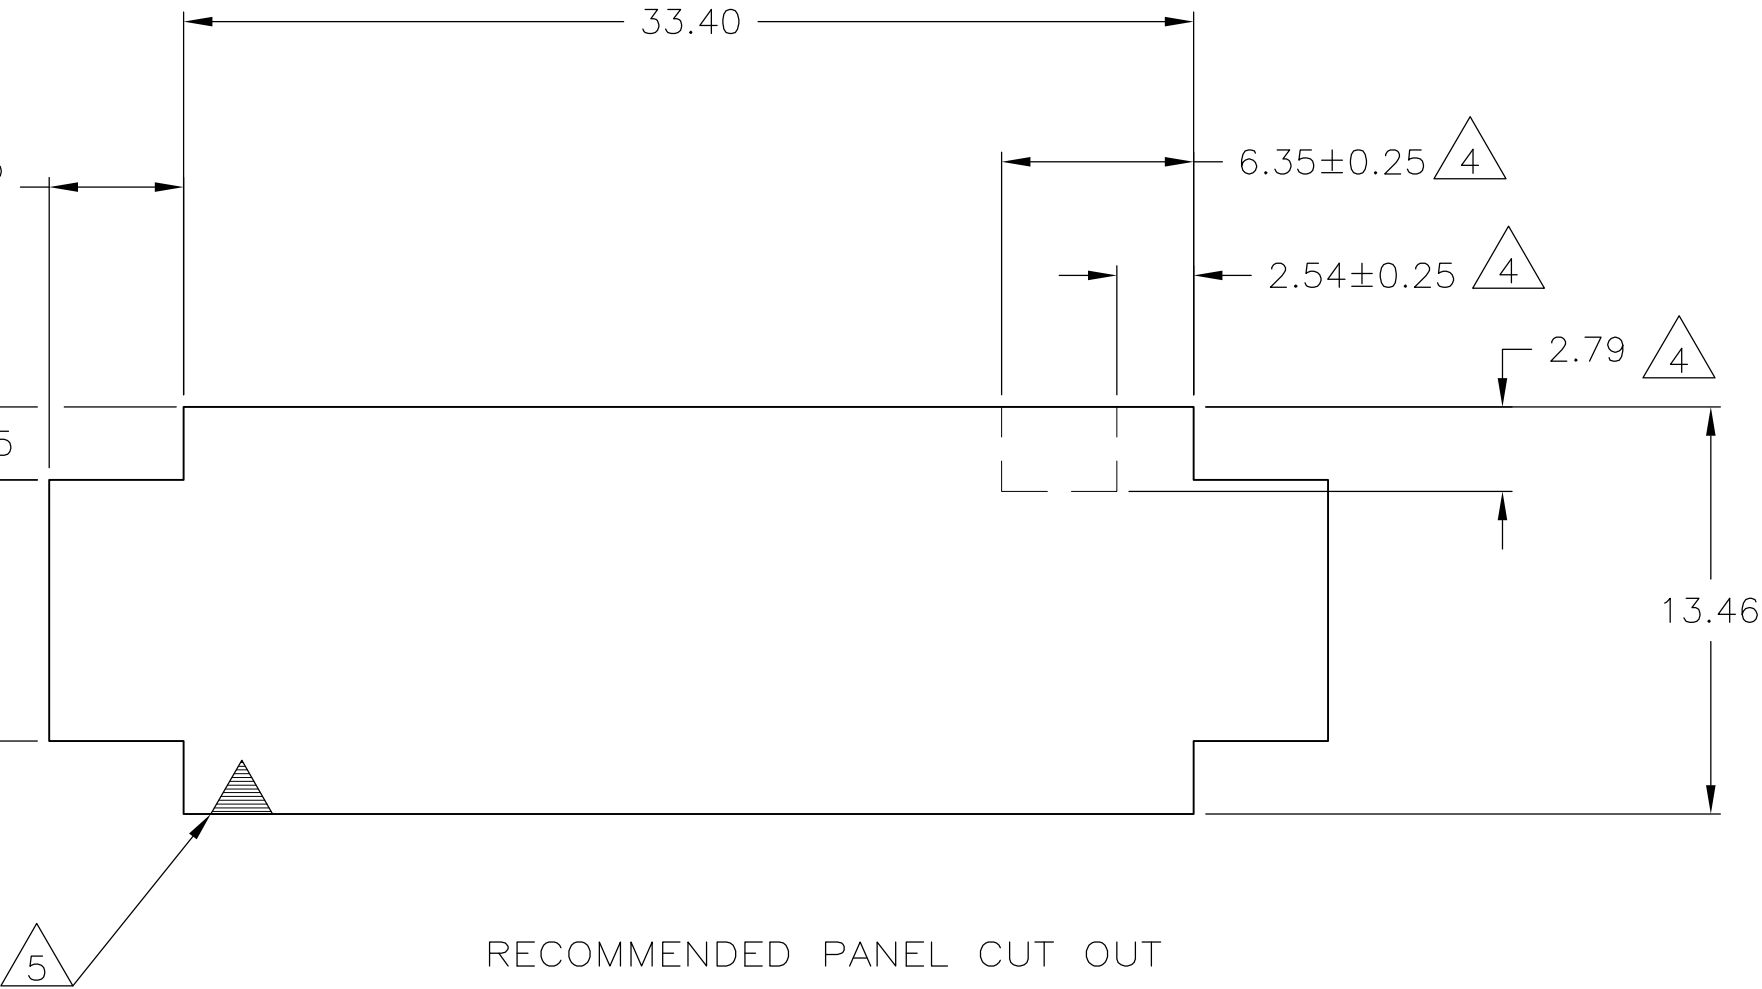

RECOMMENDED PANEL CUT OUT

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
- RECOMMENDED PANEL THICKNESS 0.76 – 2.29.
- PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- OPTIONAL FOR KEYING HOUSING IN PANEL.
- CIRCUIT NUMBER 1 LOCATION.
- DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

4.45	.175	33.40	1.315
2.79	.110	33.02	1.300
2.54	.100	27.43	1.080
2.41	.095	13.46	.530
2.29	.090	13.21	.520
0.76	.030	8.64	.340
0.38	.015	8.13	.320
0.25	.010	7.62	.300
0.13	.005	6.35	.250
MM	IN	MM	IN

CONVERSION TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	07JUN92	TE Connectivity			
		CHK R. SWING	07JUN92				
DIMENSIONS:		APVD D. SELF	08JUN92	NAME			
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CAP.5 CIRCUIT, UNIVERSAL MATE-N-LOK™			
		0. PLC	± .	APPLICATION SPEC			
		1. PLC	± .	SIZE			
		2. PLC	± 0.13	CAGE CODE			
		3. PLC	± .	DRAWING NO			
ANGLES		4. PLC	± .	RESTRICTED TO			
		ANGLES	± 1°				
MATERIAL		FINISH	-	A1 00779 480764			
NYLON, UL 94V-2				CUSTOMER DRAWING			
				SCALE 4:1 SHEET 1 OF 1 REV AD3			