

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION




20

© COPYRIGHT 20 BY -

ALL RIGHTS RESERVED.


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	03JUN2015	DW	CW

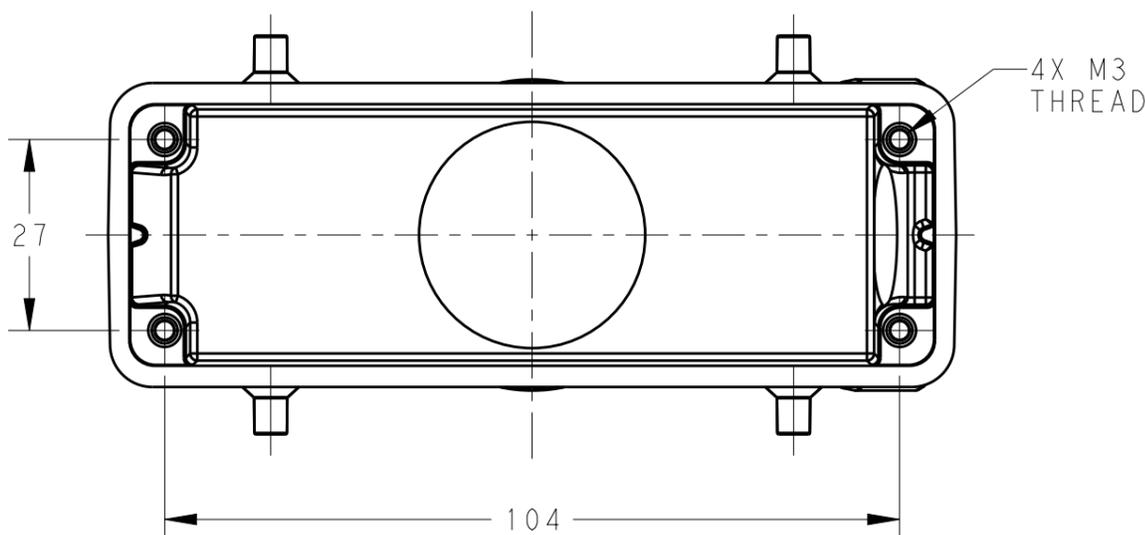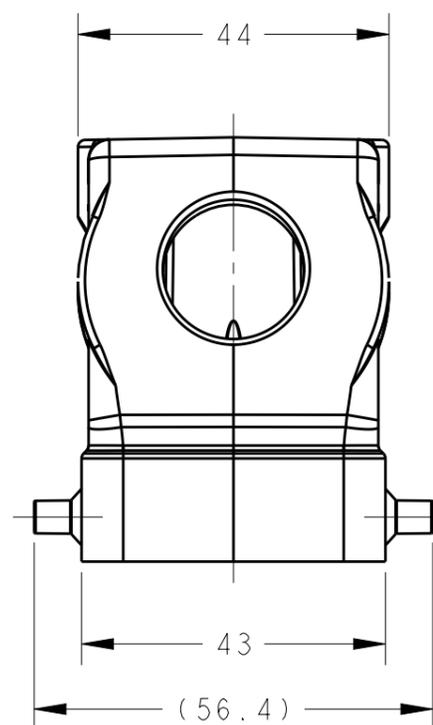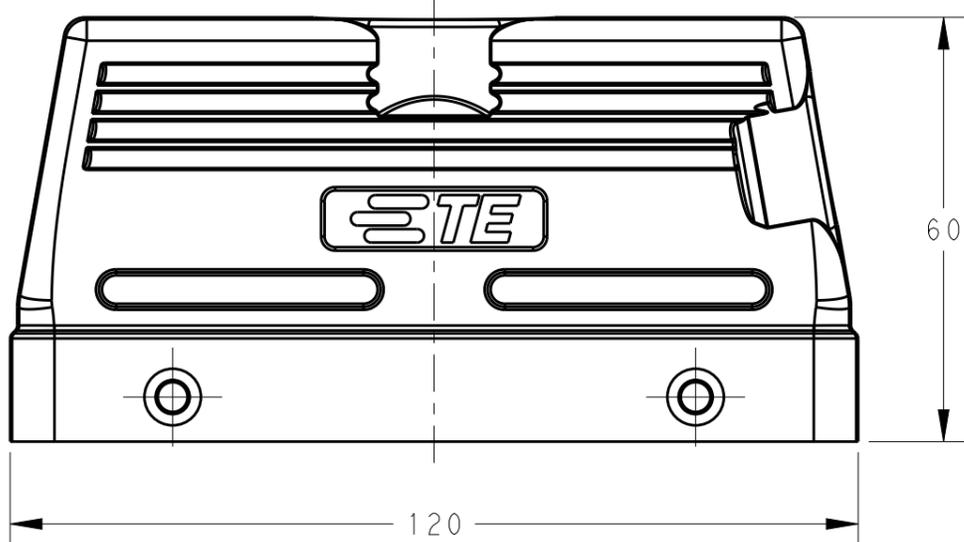

NOTES:
 1. TECHNICAL CHARACTERISTICS:
 HOOD MATERIAL: DIE CAST ALUMINIUM ALLOY
 SURFACE: POWDER COATED, GREY
 OPERATION TEMPERATURE: -40-+125°C
 DEGREE OF PROTECTION: IP65 (MATED)

注释:
 1. 技术参数:
 上壳材料: 铝合金
 表面处理: 粉末涂层, 灰色
 工作温度: -40-+125°C
 防护等级: IP65(配合)

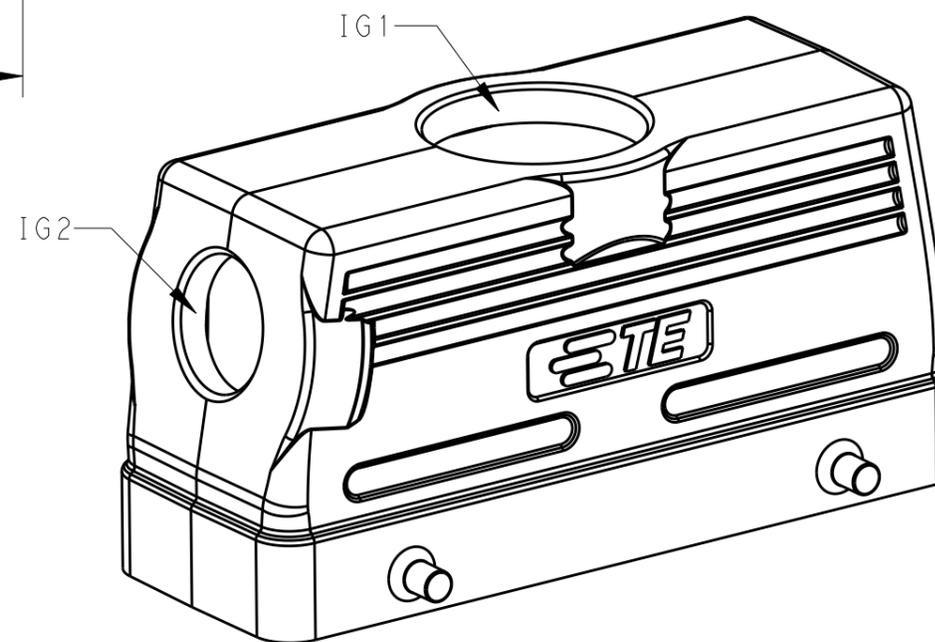

T1200243220-000	H24B-TG-M32/TS-M20	M32	M20
PART NUMBER	DESCRIPTION	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 03JUN2015 David Wang	 TE Connectivity			
DIMENSIONS: mm		CHK 03JUN2015 Chris Wang			NAME H24B-TG-M32/TS-M20	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 03JUN2015 Xiang Xu	PRODUCT SPEC 108-137013			
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		APPLICATION SPEC 114-137013	SIZE A3	CAGE CODE 00779	DRAWING NO T1200243220000	RESTRICTED TO -
MATERIAL -		FINISH -	WEIGHT -		SCALE 1:1 SHEET 1 OF 1 REV A	
		Customer Drawing				