

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

1703403022

Status:

Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 85 Ohm Plus 4 Pair, Right Angle Daughtercard, Left Guided, 12 Columns, 144 Circuits, Plated Through Hole Dimension 0.39mm, Lead Free

Documents:

3D Model

Application Specification AS-76060-990 (PDF)

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-170540-999 (PDF)

Agency Certification

UL

E29179

General

Product Family

Backplane Connectors

Series

170340

Application

Conventional, Coplanar, Daughtercard

Component Type

PCB Receptacle

Overview

Impact™ Backplane Connector and Cable Assembly System

Product Name

Impact™

UPC

887191147994

Physical

Circuits (Loaded)

144

Circuits (maximum)

144

Color - Resin

Gray

Durability (mating cycles max)

200

First Mate / Last Break

No

Flammability

94V-0

Guide to Mating Part

Yes

Keying to Mating Part

None

Material - Metal

High Performance Alloy (HPA)

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Net Weight

19.531/g

Number of Columns

12

Number of Pairs

4

Number of Rows

12

Orientation

Right Angle

PC Tail Length

1.20mm

PCB Locator

No

PCB Retention

None

PCB Thickness - Recommended

1.00mm

Packaging Type

Tray

Pitch - Mating Interface

1.35mm, 1.90mm

Pitch - Termination Interface

1.35mm, 1.90mm

Plating min - Mating

0.762µm

Polarized to PCB

No

Stackable

No

Surface Mount Compatible (SMC)

No


Temperature Range - Operating

-55°C to +85°C

Termination Interface: Style

Through Hole - Compliant Pin

Electrical

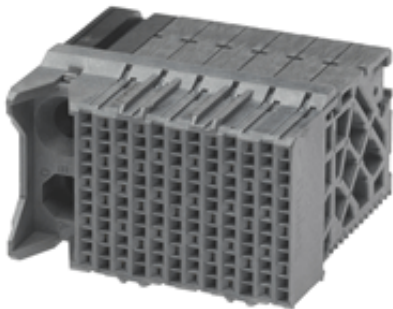

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Contains SVHC(2014

December 17): No

Halogen-Free

Status

Low-Halogen

Need more information on product

environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

170340 Series

Mates With

170335 Impact™ 85 Ohm Plus Vertical Header

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Impact™

0622018839

Daughtercard

Module Installation

Press-In Tool

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	85#
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-76060-990
Electrical Model Document	EE-170340-001
Product Specification	PS-170540-999
S-Parameter Model	SP-170340-001
Sales Drawing	SD-170340-0002
Symbol/Footprint Data	SYM-170340-3022

This document was generated on 07/01/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION