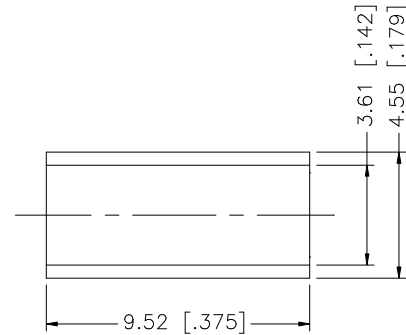
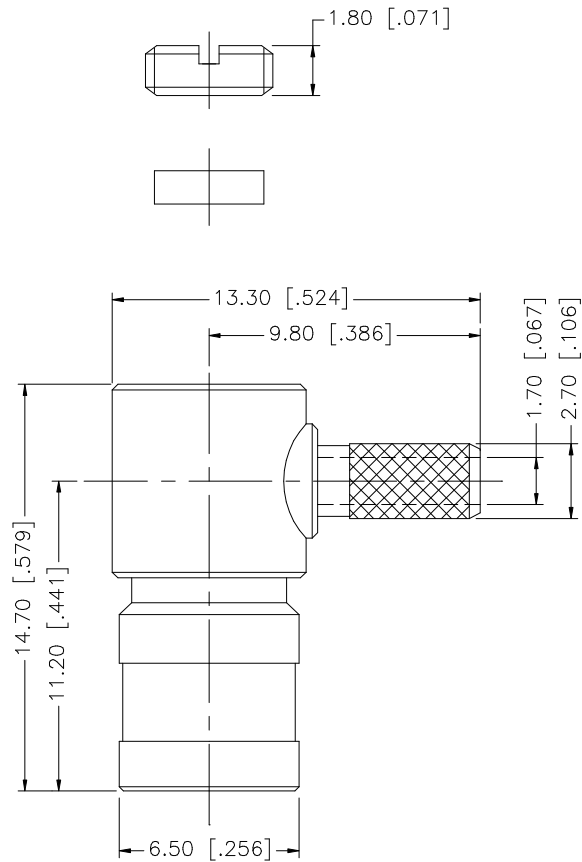


NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER.

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex			
8					DRAWN	G.R.S.	05/02/07					
7	HEAT SHRINK TUBING		1		CHECKED							
6	COVER	BRASS	GOLD		1	ISSUED			PART DESCRIPTION SMB R/A CRIMP PLUG (FOR RG-174/U, 316/U, 188/U DOUBLE BRAID)			
5	FERRULE	COPPER	GOLD		1	SHEET	1 OF 1					
4	INSULATOR	PE	NATURAL		1			PART NO. 142176				
3	CONTACT PIN	BER. COPPER	GOLD		1							
2	INSULATOR	TEFLON	NATURAL		1			DWG. NO. 142176.DWG REV. B SIZE A SCALE NA				
1	BODY	BRASS	GOLD		1							
DESCRIPTION		MATERIAL	FINISH		QTY	CAD FILE C:/142/142176.DWG						