

## AMS-17 SERIES

### 3/8" MINI RECESSED CONTACT




- UL Listed
- 5/16" operating gap
- Alnico 5 magnet
- Optional AD-17 adapter available
- Available in white, brown, or ivory

#### Application

The AMS-17 Series Mini Recessed Contact is a UL listed contact designed to provide a clean and easy installation for standard openings. The AMS-17 Series is ideal for areas where small size is important. These contacts may be used to secure a variety of openings such as: man doors, sliding doors, windows, and other openings where a small concealed contact is necessary.

#### Dimensions

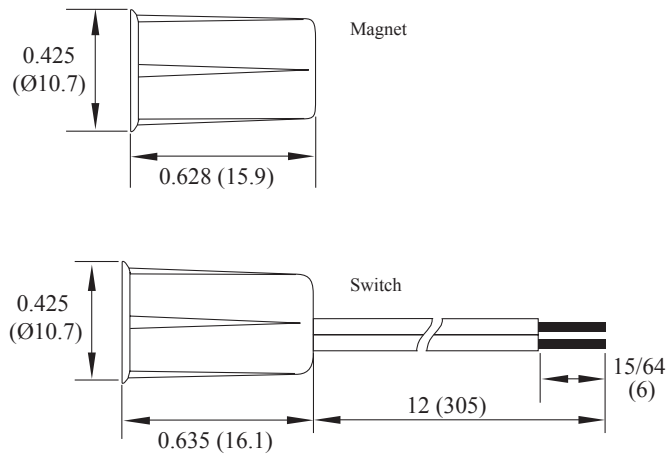

#### Specifications

Model	Color	Stock Number	Contact	Contact Rating	Contact Type	Max. Carry Current	Max. Switching Current	Breakdown Voltage	Operating Gap	Mounting Method	Operating Temperature Range
AMS-17	White	4350121	22AWG 12" Lead	1.0VA	Form A N.O	.3 Amp	.1 Amp	150VDC	5/16"	Press fit	32°F to 120°F (0°C to 49°C)
	Brown	4350118									
	Ivory	4350120									
AMS-T17	White	4350225	Terminal	1.0VA	Form A N.O	.3 Amp	.1 Amp	150VDC	5/16"	Press fit	32°F to 120°F (0°C to 49°C)
	Brown	4350094									
	Ivory	4350224									
AD-17	White	4350128	Allows 3/8" switch to be placed in a 3/4" hole.								
	Brown	4350127									