

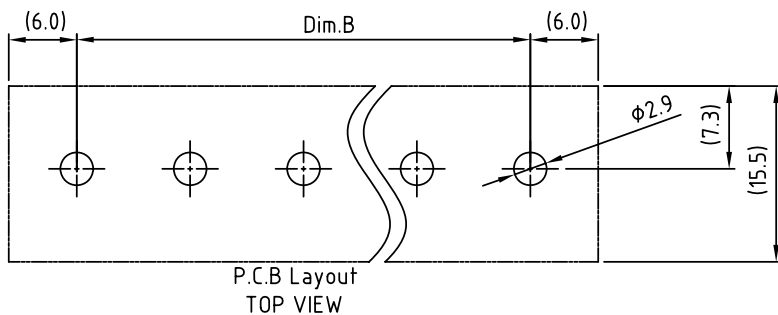


N= Number of Poles
Dimension Dim A. B

Dim.A	$N \times 10.0 + 2.0$
Dim.B	$(N-1) \times 10.0$

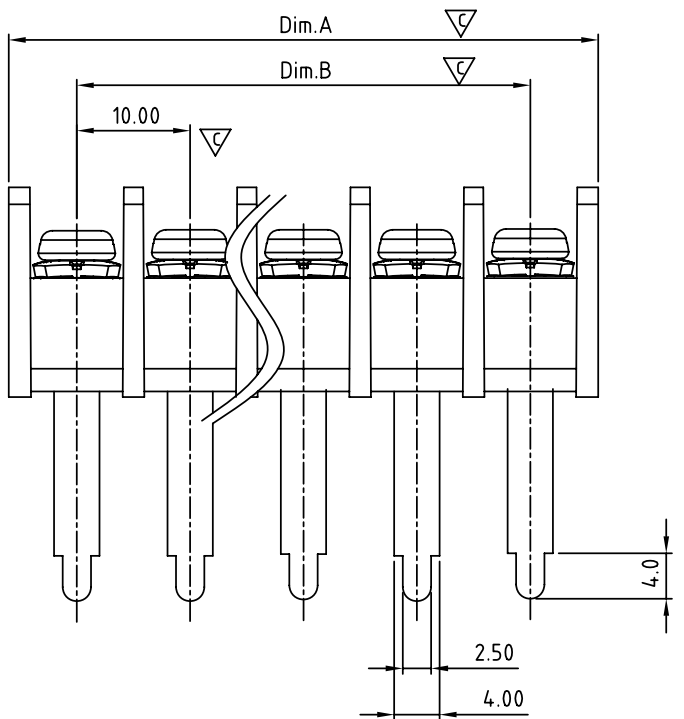

Poles	Tolerance
2P-5P	± 0.20
6P-10P	± 0.25
11P-16P	± 0.35
17P-24P	± 0.40
25P-30P	± 0.50

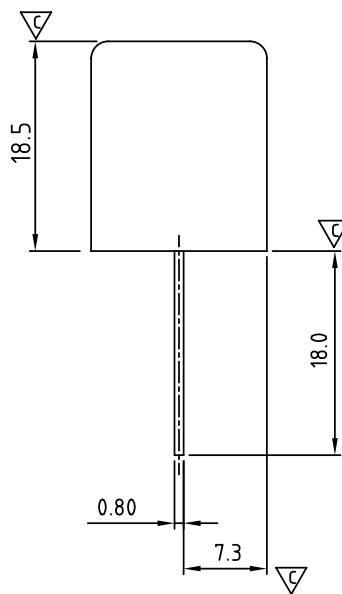

SIGN	DATE	DESCRIPTION	APPROVER
	11/13'12	Change the screw plating specification	Guoxue
	11/13'12	Change the dimensional tolerance	Guoxue
	11/13'12	Update the drawing	Guoxue

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

MATERIALS ELECTRICAL

RATED VOLTAGE & CURRENT:	300 V, 25 A
WITHSTAND VOLTAGE:	AC 2000 V/Min
INSULATION RESISTANCE:	1000 MΩ OR MORE AT DC 500 V
OPERATING TEMPERATURE RANG:	-40 °C ~ +115 °C
SCREW TORQUE VALUE:	8.8 Lb-In.
WIRE RANGE:	22 - 12 AWG
1) MOLDED PARTS:	POLYIMIDE 66, UL 94 V-0 BLACK
2) TERMINAL:	BRASS, 0.8t, Tin PLATED
3) TERMINAL SCREWS:	STEEL, M3.5

APPROVAL:

Critical dimension:

PART NO.:

YK 616 xx 0 x x 00G

G RoHS compliant
(lead<4%)
In copper Alloy

NO. OF POLES

02: 2 POLES
03: 3 POLES
04: 4 POLES

30: 30 POLES

MARK

0: "@" MARK
1: "ANY" MARK

TERMINAL & SCREW PLATED

0: TERMINAL & SCREW: G/F
1: TERMINAL: G/F, SCREW: ZINC
2: TERMINAL: Sn, SCREW: G/F
3: TERMINAL: Sn, SCREW: ZINC

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		YK-616 W/O Flange Series			
PART NO.	YK616xx0xx00G	DWG NO.	8YK0001-616		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Guoxue 2012.12.01	Guoxue 2012.12.01		
		SHEET: 01/01		UNIT: mm	Tolerance
				SCALE: NONE	X. ± 0.50
				REV.: D	X.X ± 0.30
					X.XX ± 0.10
					X° $\pm 1^\circ$