

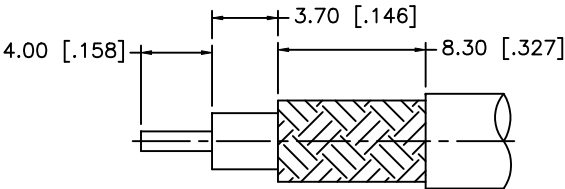
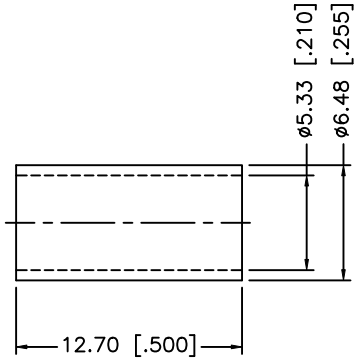


REV.	DATE	ECR NO.	DESCRIPTION
A	04/04/03	—	UPDATE DRAWING FORMAT
B	09/21/08	—	ADD COUPLING NUT TO BOM

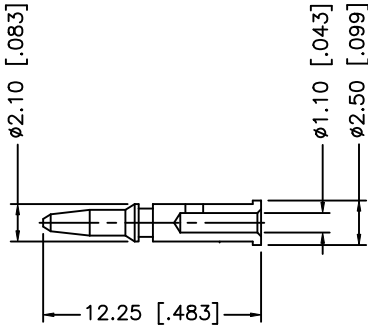

RECOMMENDED CABLE
STRIPPING DIMENSIONS

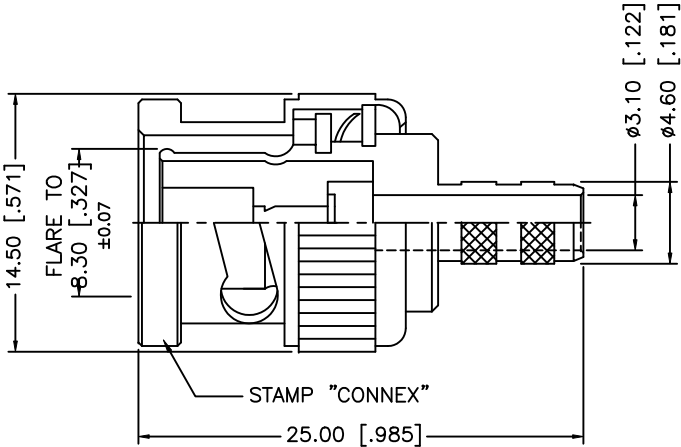

- NOTES:
1. CRIMPED FERRULE HEX CRIMP SIZE .213" [5.41]
 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.72]

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
7						DRAWN		GRS							09/21/08			
6						CHECKED				PART DESCRIPTION BNC CRIMP PLUG (FOR RG-58C/U CABLE)								
5	FERRULE	COPPER	NICKEL	1		ISSUED												
4	CONTACT PIN	BRASS	GOLD	1		SHEET		1 OF 1		PART NO. 112120								
3	INSULATOR	DELRI	NATURAL	1		CAD FILE		C:/112/112120.DWG										
2	COUPLING NUT	DIECAST	NICKEL	1					DWG. NO.		112120.DWG		REV.	B	SIZE	A	SCALE	NA
1	BODY	BRASS	NICKEL	1														
	DESCRIPTION	MATERIAL	FINISH	QTY														