



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2012/10/22	Ruru	LD20-14RMFS-SS8001 To LD20-14PMFS-SN8001
B	LE31650237	2016/05/04	Vicky	Update Note

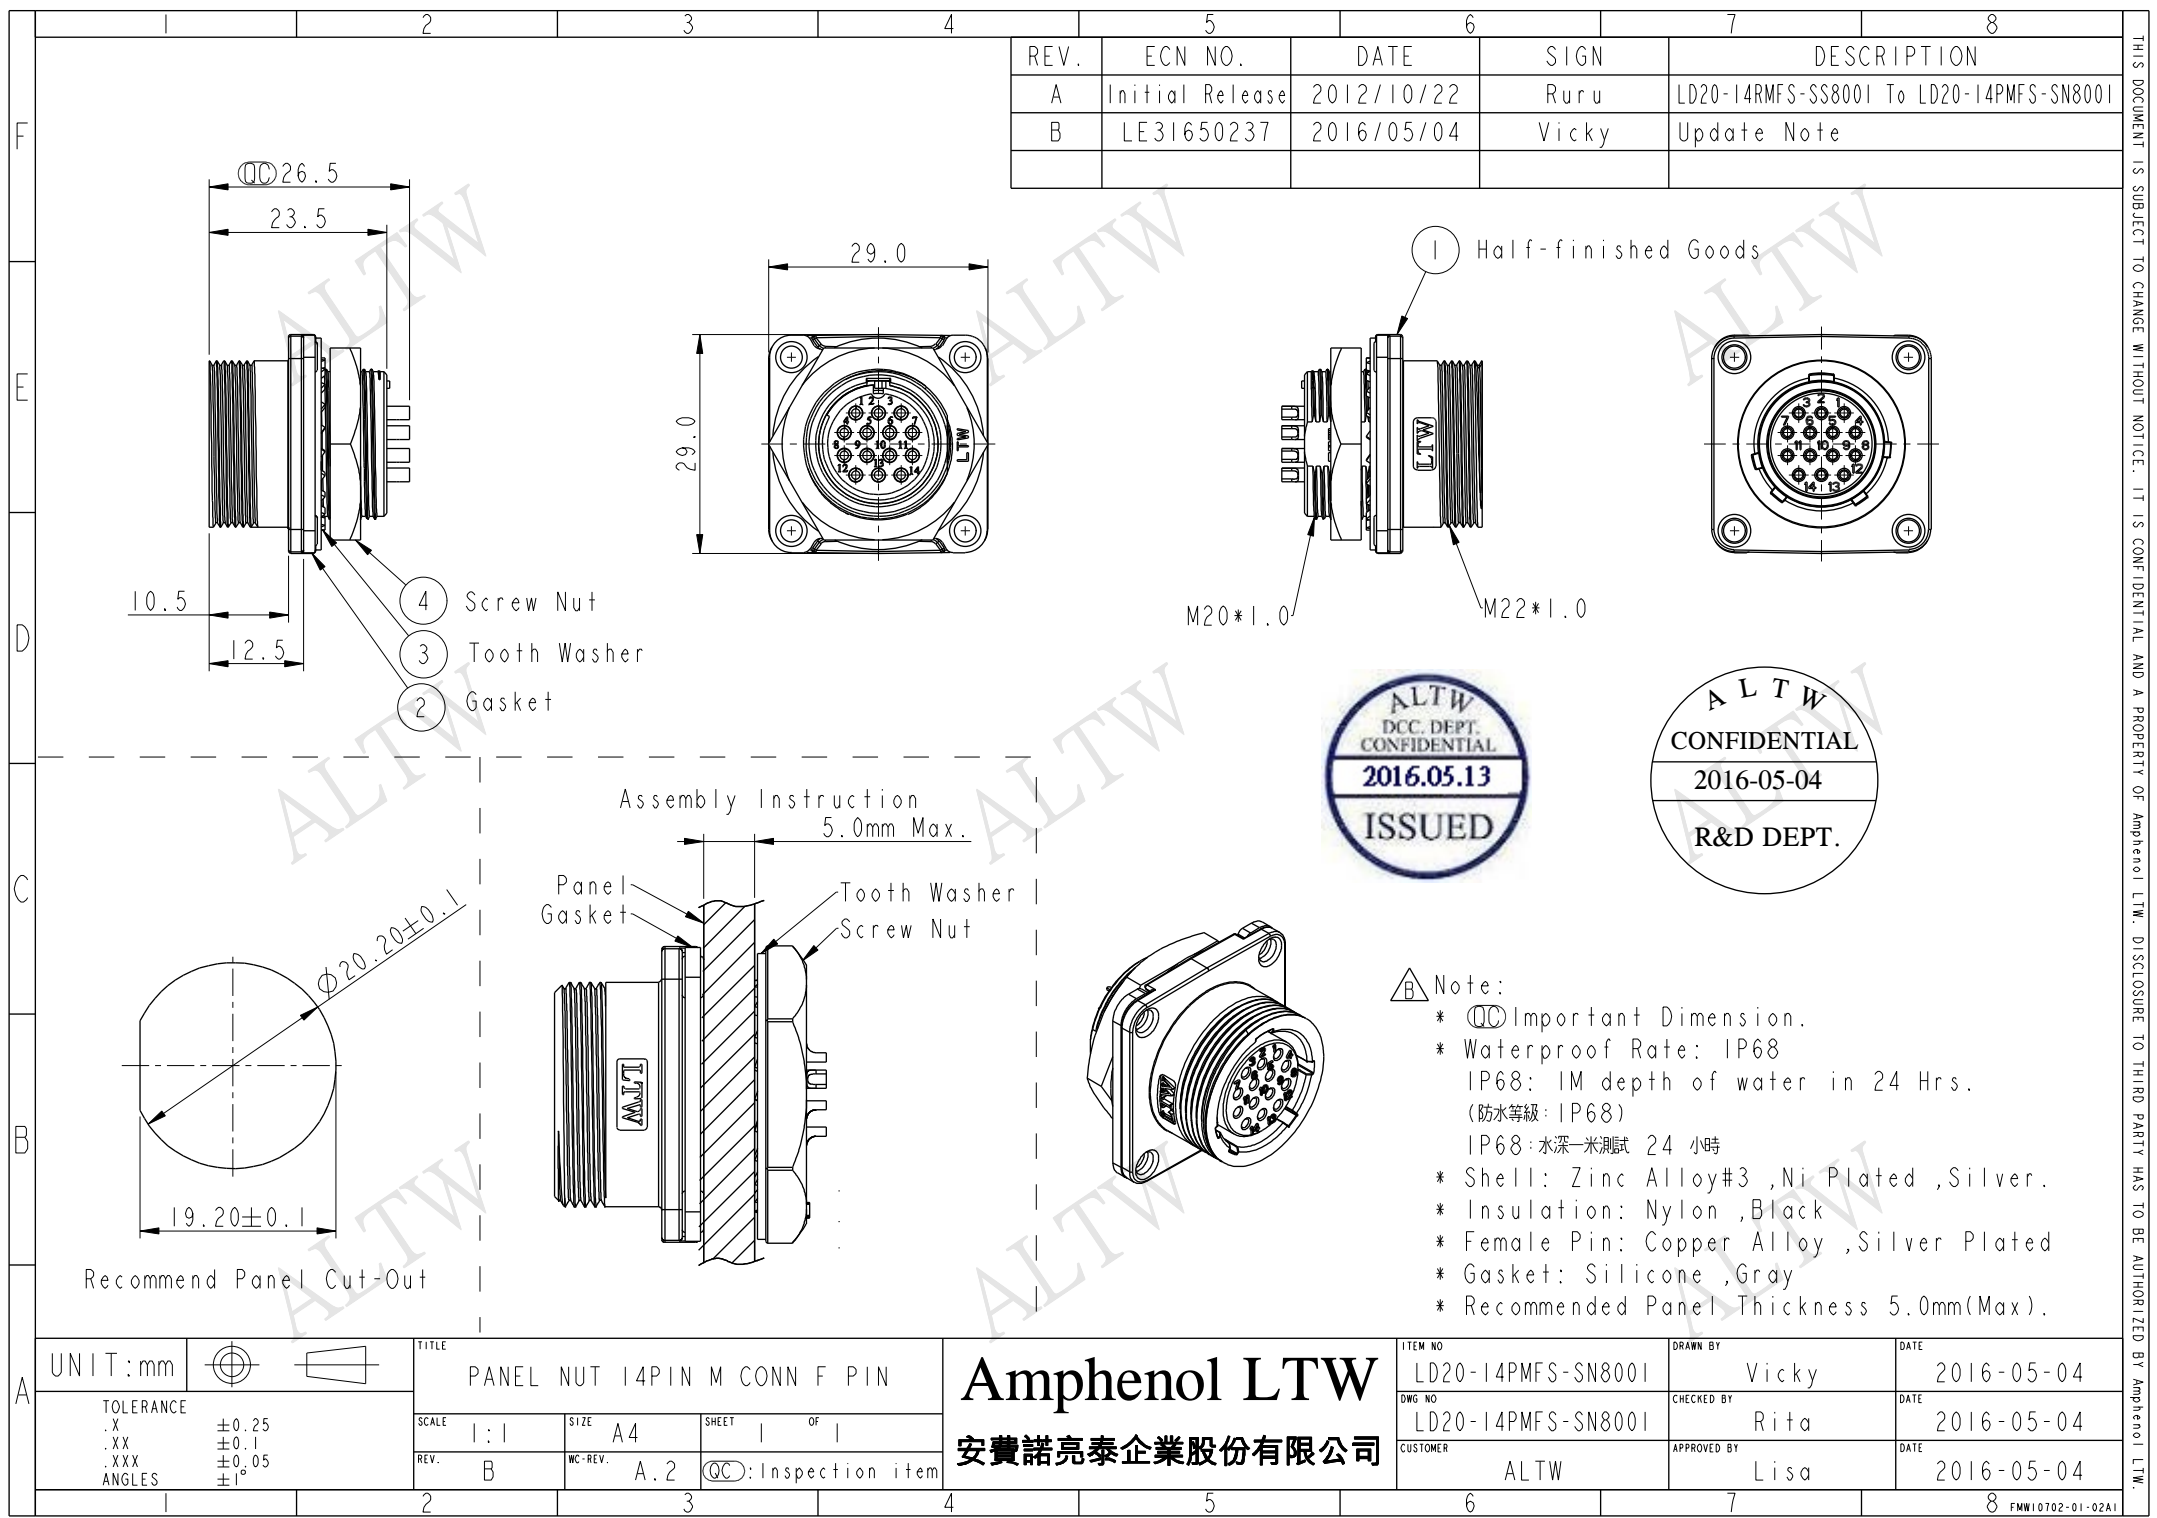

- Note:
- * $\varnothing$ Important Dimension.
 - * Waterproof Rate: IP68
IP68: 1M depth of water in 24 Hrs.
(防水等級: IP68)
IP68: 水深一米測試 24 小時
 - * Shell: Zinc Alloy#3 ,Ni Plated ,Silver.
 - * Insulation: Nylon ,Black
 - * Female Pin: Copper Alloy ,Silver Plated
 - * Gasket: Silicone ,Gray
 - * Recommended Panel Thickness 5.0mm(Max).

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
TOLERANCE		SCALE		DWG NO		CHECKED BY		DATE	
.X ±0.25		1:1		LD20-14PMFS-SN8001		Rita		2016-05-04	
.XX ±0.1		A4		LD20-14PMFS-SN8001		Lisa		2016-05-04	
.XXX ±0.05		REV. B		CUSTOMER		APPROVED BY		DATE	
ANGLES ±1°		WC-REV. A.2		ALTW		Lisa		2016-05-04	
		SHEET 1 OF 1							
		QC: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.