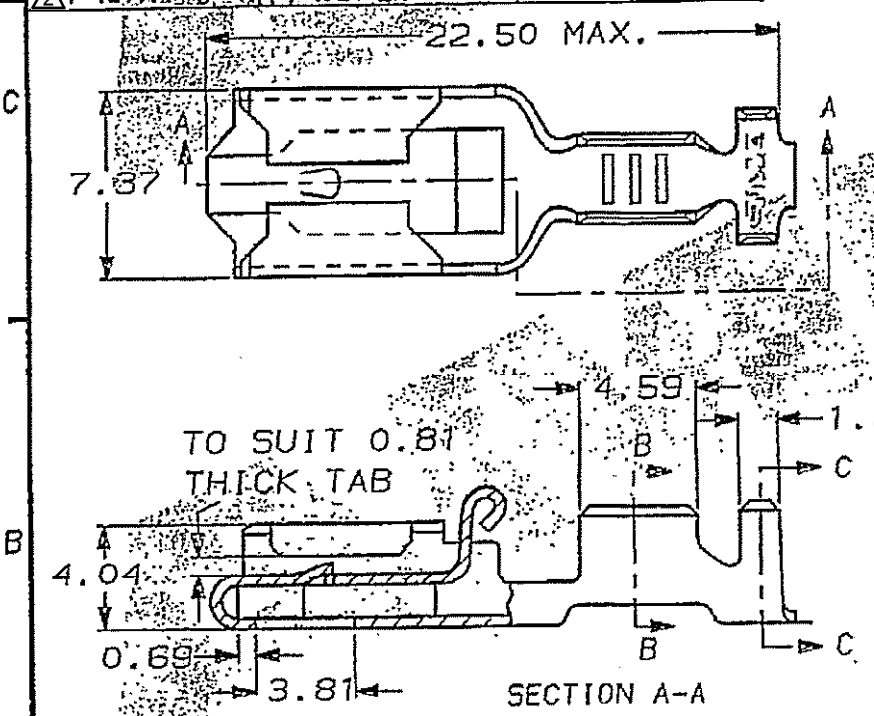




- 1 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
 2 OBSOLETE

DO NOT SCALE		DIMENSIONS IN MM.					
PART NUMBER	MATERIAL	FINISH	REELING	LOOSE PIECE REF. ONLY			
154717-1	BRASS	NONE	STANDARD	341001-1			
154717-2	PHOS. BRONZE	NONE	STANDARD	341001-2			
154717-3	BRASS	TIN	STANDARD	341001-3			
154717-4	PHOS. BRONZE	TIN	STANDARD	341001-4			
154717-5	PHOS. BRONZE	NONE	STANDARD	341001-5			
154717-6	BRASS	PRE-TIN	STANDARD	341001-6			
154717-7	PHOS. BRONZE	PRE-TIN	STANDARD	341001-7			
154717-8	PHOS. BRONZE	SILVER	STANDARD	341001-8			
154717-9	BRASS	SILVER	STANDARD	341001-9			
1-154717-10	OBSOLETE	OBSOLETE	OBSOLETE	---			
1-154717-1	BRASS	NONE	REV. REEL VERSION-1	---			
1-154717-2	PHOS. BRONZE	NONE	REV. REEL VERSION-2	---			
1-154717-3	PHOS. BRONZE	PRE-TIN	STANDARD	---			
1-154717-4	BRASS	TIN	REV. REEL VERSION-3	---			
1-154717-5	PHOS. BRONZE	TIN	REV. REEL VERSION-4	---			
1-154717-6	PHOS. BRONZE	TIN	STANDARD (SPLICE FREE VERSION)	---			

C.A.D. FILE CODE
C154717

TO SUIT 0.81 THICK TAB

WIRE RANGE 2.5 TO 4.0mm ²		INSULATION RANGE 3.6 TO 4.3mm DIA.	
CUSTOMER DWG FOR REFERENCE ONLY		RELEASED FOR PUBLICATION ORIGINAL 1974	
A		TOLERANCES UNLESS OTHERWISE STATED DEC ± 0.5 ANGLES ± 1°	
		DR. D.A.BARRATT 27.11.91 CH. D.TERRY APP. D.A.BARRATT  TE Connectivity	
NAME POSITIVE LOCK RECEPTACLE			
AR3	ECR-15-007886	17JUN15	NK GH
REV	DESCRIPTION	DATE	DWN APVD
SCALE 4/1	LOC E	SIZE A4	DWG.No. C154717
REV AR3			SHEET 1/1