
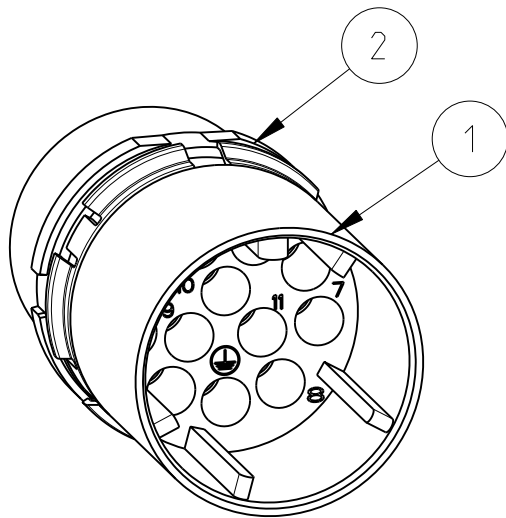

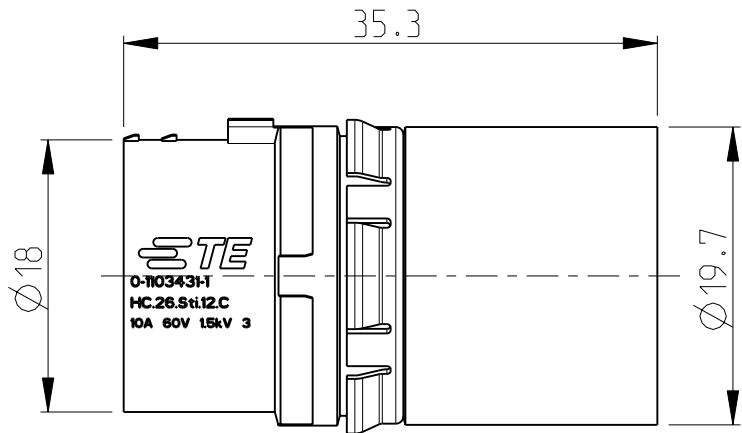


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
A1	-		B2	ECR-11-002481	03FEB2011	VG	GW
			B3	ECR-11-017678	26AUG2011	SR	BR
			C1	ECR-11-018403	07SEP2011	OH	BR
			C2	ECR-11-021475	18NOV2011	GW	BR

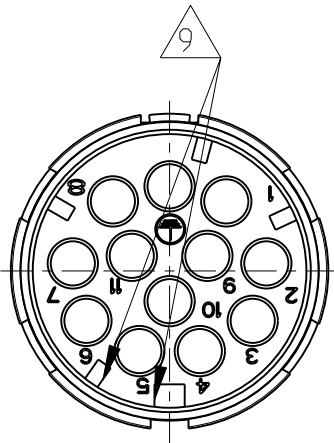


- Notes
- 1 SUITABLE HOUSINGS: SERIES HC26
CUSTOMER DRAWING: 1103433, 1103434
 - 2 OUTER DIMENSIONS OF INSULATION: MAX. Ø3.2 MM
 - 3 SUITABLE CRIMP CONTACTS:
CUSTOMER DRAWING: 827040
 - 4 SUITABLE SUB-MIN. COAXICON CONTACTS:
CUSTOMER DRAWING: 51563
 - 5 SUITABLE LWL (OPTICS) CONTACTS:
CUSTOMER DRAWING: 216341
 - 6 SUITABLE INSERTION TOOL:
CUSTOMER DRAWING: 1102855
 - 7 SUITABLE EXTRACTION TOOL:
CUSTOMER DRAWING: 1102855
 - 8 STANDARDS:
DIN EN 61984, DIN EN 60664-1
 - 9 POLARIZATION RIPS
 - 10 PACKAGING:
40 SETS IN A CARTON

PN 0-1 AS SHOWN

B3

1	RETAINING RING	PA66-GF25	GREY	SERIES HC26, INSERT	2
1	MALE INSERT	PBT-GF10	GREY	SERIES HC26, 12-POS. TYPE III+	1
QTY	DESCRIPTION	MATERIAL	SURFACE/COLOR	NOTE	ITEM

PARTS LIST

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.BRAUN 08NOV2007	 TE Connectivity				
DIMENSIONS: mm		CHK T.VETTER 28OCT2008	NAME MALE INSERT ASS'Y SERIES HC26, 12-POS., TYPE III+ POWER 4 NET				
		APVD T.SCHNURPFEL 28OCT2008					
		PRODUCT SPEC 108-74097					
		APPLICATION SPEC 114-74103					
MATERIAL -		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-1103431	RESTRICTED TO -	
FINISH -		CUSTOMER DRAWING			SCALE 2:1	SHEET 1 OF 1	REV C2