
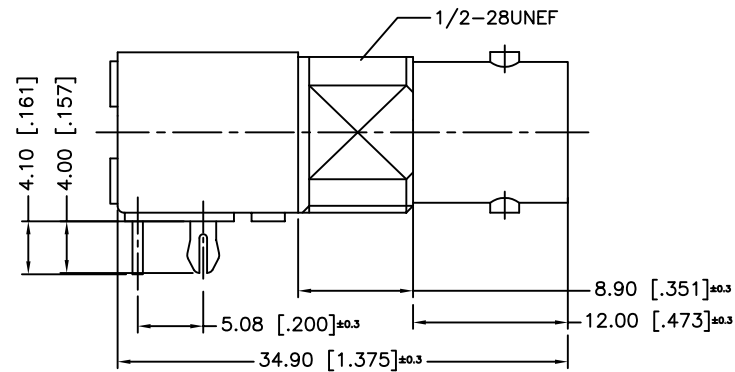
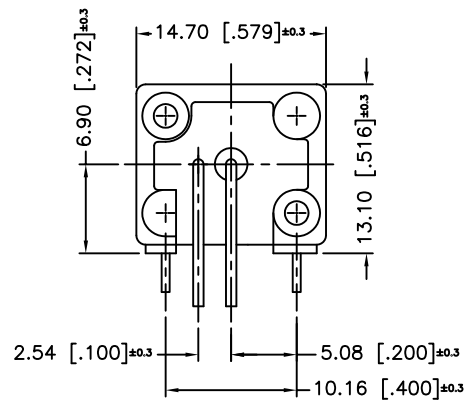
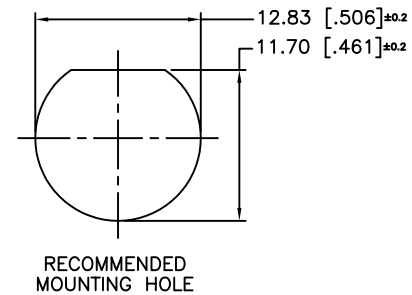


REV.	DATE	ECR NO	DESCRIPTION
A	09/11/03	--	MODIFY BODY DIMENSIONS
B	03/30/08	--	REVISE MOUNTING PINS, ADD FLAT TO THREADED AREA
C	02/25/10	2012	HARDWARES REMOVED

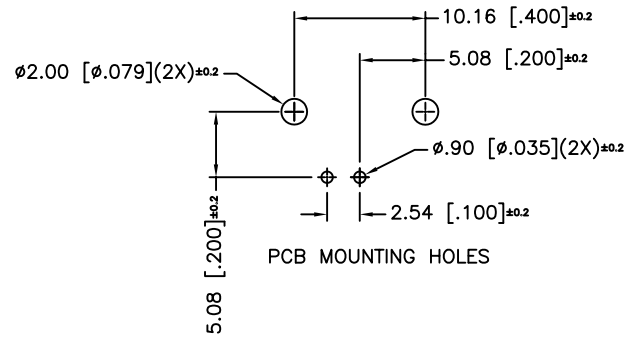

NOTE:

1. MAX. PANEL THICKNESS = 5mm

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex						
					DRAWN	CLEMENT	02/25/10								
					CHECKED			PART DESCRIPTION BNC R/A PCB MOUNT RECEPT. JACK (LOW PROFILE)							
					ISSUED										
					SHEET	1 OF 1		PART NO. 112494							
					CAD FILE C:/112/112494.DWG			DWG. NO.		112494.DWG	REV.	C	SIZE	A	SCALE
5	MOUNTING POST	BRASS	TIN PLATE	1											
4	POST	COPPER	TIN PLATE	1											
3	CONTACT PIN	PHOS. BRONZE	GOLD	1											
2	INSULATOR	P.P.	NATURAL	1											
1	BODY	ZINC DIECAST	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											