


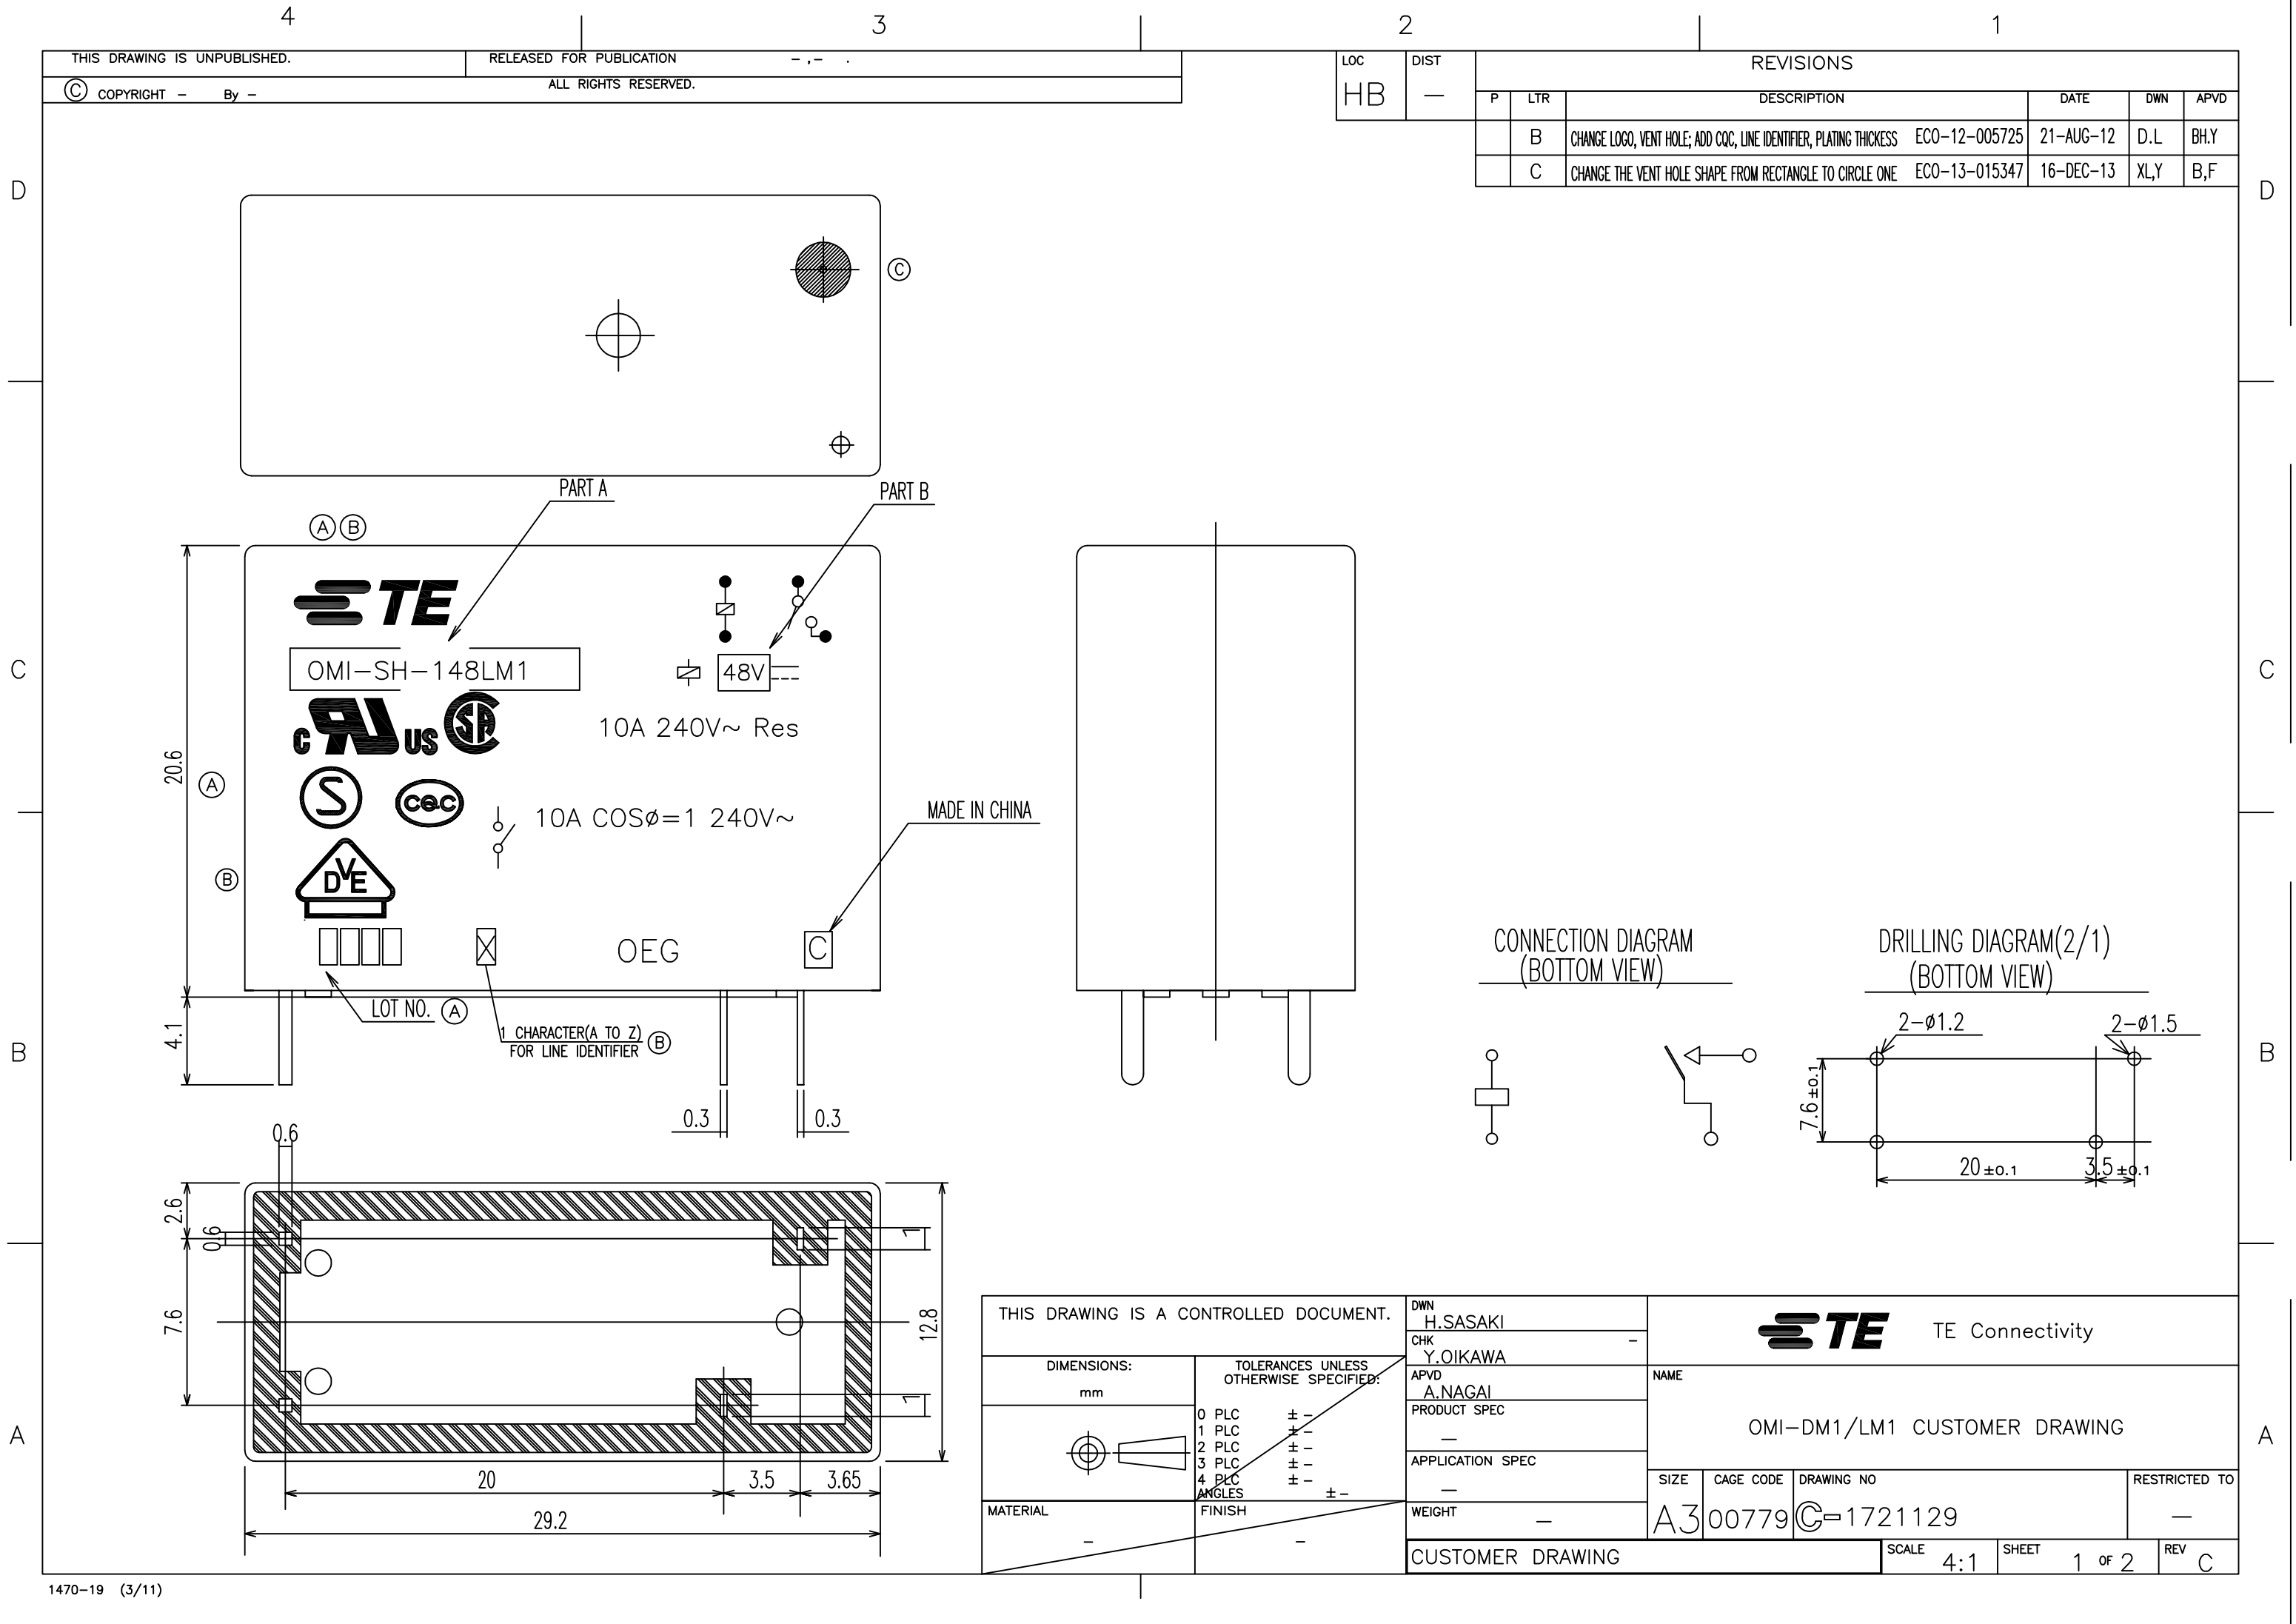

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

HB

-

P

LTR

DESCRIPTION

DATE

DWN

APVD

3-1721129-2	OMI-SH-148LM1	48V	OMI-SH-148LM1	ff	2-1721129-4	OMI-SH-109LM1	9V	OMI-SH-109LM1	x	1-1721129-2	OMI-SS-118LM1	18V	OMI-SS-118LM1	l
3-1721129-1	OMI-SH-148DM1	48V	OMI-SH-148DM1	ee	2-1721129-3	OMI-SH-109DM1	9V	OMI-SH-109DM1	w	1-1721129-1	OMI-SS-118DM1	18V	OMI-SS-118DM1	k
3-1721129-0	OMI-SH-124LM1	24V	OMI-SH-124LM1	dd	2-1721129-2	OMI-SH-106LM1	6V	OMI-SH-106LM1	v	1-1721129-0	OMI-SS-112LM1	12V	OMI-SS-112LM1	j
2-1721129-9	OMI-SH-124DM1	24V	OMI-SH-124DM1	cc	2-1721129-1	OMI-SH-106DM1	6V	OMI-SH-106DM1	u	1721129-9	OMI-SS-112DM1	12V	OMI-SS-112DM1	i
2-1721129-8	OMI-SH-118LM1	18V	OMI-SH-118LM1	bb	2-1721129-0	OMI-SH-105LM1	5V	OMI-SH-105LM1	t	1721129-8	OMI-SS-109LM1	9V	OMI-SS-109LM1	h
2-1721129-7	OMI-SH-118DM1	18V	OMI-SH-118DM1	aa	1-1721129-9	OMI-SH-105DM1	5V	OMI-SH-105DM1	s	1721129-7	OMI-SS-109DM1	9V	OMI-SS-109DM1	g
2-1721129-6	OMI-SH-112LM1	12V	OMI-SH-112LM1	z	1-1721129-8	OMI-SH-103LM1	3V	OMI-SH-103LM1	r	1721129-6	OMI-SS-106LM1	6V	OMI-SS-106LM1	f
2-1721129-5	OMI-SH-112DM1	12V	OMI-SH-112DM1	y	1-1721129-7	OMI-SH-103DM1	3V	OMI-SH-103DM1	q	1721129-5	OMI-SS-106DM1	6V	OMI-SS-106DM1	e
PART NO	EC TYPE NAME	PART B	PART A	ITEM	1-1721129-6	OMI-SS-148LM1	48V	OMI-SS-148LM1	p	1721129-4	OMI-SS-105LM1	5V	OMI-SS-105LM1	d
					1-1721129-5	OMI-SS-148DM1	48V	OMI-SS-148DM1	o	1721129-3	OMI-SS-105DM1	5V	OMI-SS-105DM1	c
					1-1721129-4	OMI-SS-124LM1	24V	OMI-SS-124LM1	n	1721129-2	OMI-SS-103LM1	3V	OMI-SS-103LM1	b
					1-1721129-3	OMI-SS-124DM1	24V	OMI-SS-124DM1	m	1721129-1	OMI-SS-103DM1	3V	OMI-SS-103DM1	a
PART NO	EC TYPE NAME	PART B	PART A	ITEM										

RELAY TYPE

NOTES:

1.-SH- : WASHABLE TYPE

-SS-:PLASTIC SEALED TYPE

1.LOT NO. SYSTEM AS FOLLOWING:

0701

WEEK

YEAR

2.GENERAL TOLERANCE AS FOLLOWING:

TOLERANCE	
0~0.99mm	±0.1
1mm~2.99mm	±0.2
3mm MIN.	±0.3

3.TERMINAL DIMENSION IS NOT INCLUDING SOLDER TIP.

④ 4.FOR THE TIN-PLATING OF THE PINS:

+0.1mm FOR WIDTH,THICKNESS AND DIAMETER.

+0.5mm FOR LENGTH.

		UV RESIN	UV SEAL	16
		EPOXY RESIN	SEAL	15
UL94 V-0		PBT	CASE	14
CLASS E		UEW	MAGNETIC WIRE	13
UL94 V-0		PET	BASE	12
UL94 V-0		PBT	BOBBIN	11
	SOLDER DIP	CP WIRE	COIL TERMINAL	10
UL94 V-0		PPS	CARD	9
		Ag ALLOY	MOVABLE CONTACT	8
		Ag ALLOY	STATIONARY CONTACT	7
		Cu ALLOY	HINGE SPRING	6
	SOLDER DIP	Cu ALLOY	STATIONARY TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
		STEEL	CORE	3
		STEEL	ARMATURE	2
		STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH -

MATERIAL

-

DWN

H.SASAKI

CHK

Y.OIKAWA

APVD

A.NAGAI

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME

OMI-DM1/LM1 CUSTOMER DRAWING

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

©=1721129

-

SCALE

4:1

SHEET

2 of 2

REV

C

1470-19 (3/11)