





PART NO. : TG01-0406NV6RL

48PIN TRANSFORMER MODULE
 DESIGNED FOR USE IN T3,DS3,E3
 AND STS-1 INTERFACES
 RETURN LOSS MEETS G.703 REQUIREMENTS
 UL60950 REGONIZED
 LEAD-FREE/RoHS COMPLIANT
 COMPATIBLE TO LEAD-FREE SOLDERING PROCESS
 CONDITION PER IPC/JEDEC J-STD-020C
 EXTENDED OPERATING TEMP. -40/+85°C

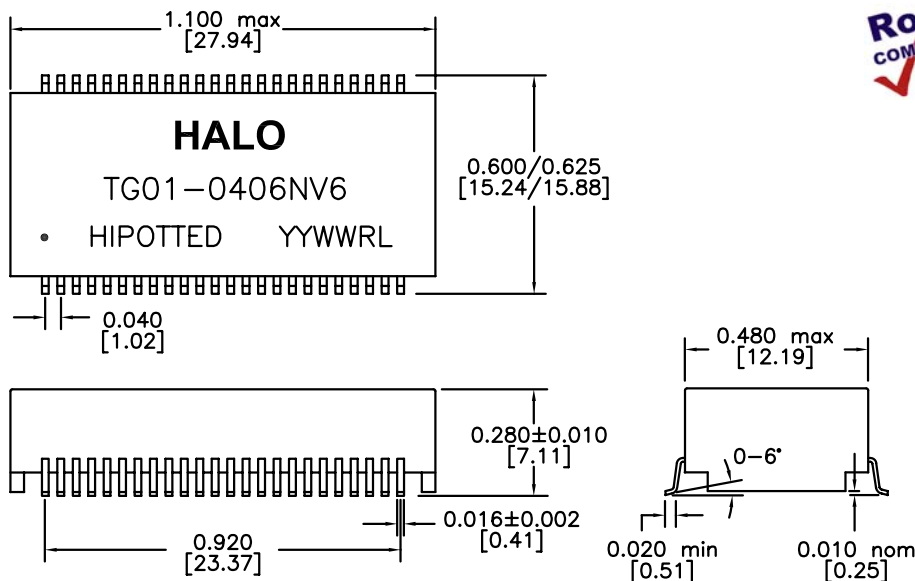

DIMENSIONS: Inch[mm]
 CO-PLANARITY: 0.004[0.10]
 TOLERANCES: ±0.005 INCH IF NOT SPECIFIED

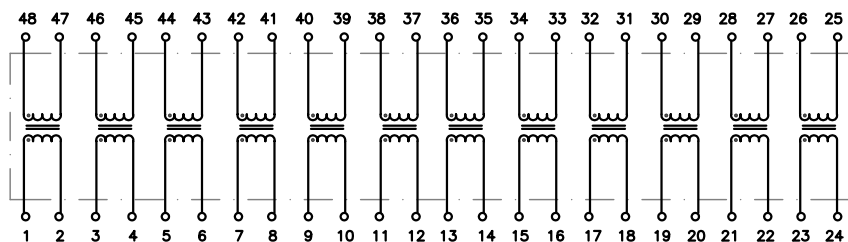


ELECTRICAL SPECIFICATIONS @ 25° C

TURNS RATIO 1:1 ±2%
 OCL 40µH min*
 LL 0.12µH max
 Cw/w 12pF max
 CROSSTALK @60MHz -60dB typ
 ISOLATION 1,500Vrms

* Minimum OCL over operating temp.

HALO/PBL	TITLE	TRANSFORMER MODULE	SIGNATURES	DATE	REV.	DESC.	DATE
	FOR	T3/DS3/E3/STS-1	DRAWN	PETER LU	4/27/05	B	DIM CORRECTION
CALIFORNIA, USA KOWLOON, HONG KONG SINGAPORE	PART NO.	TG01-0406NV6RL	CHECKED				
	SCALE	NONE	APPROVED				
	PAGE	1 OF 2	FILE	0406NV6RL.DWG			

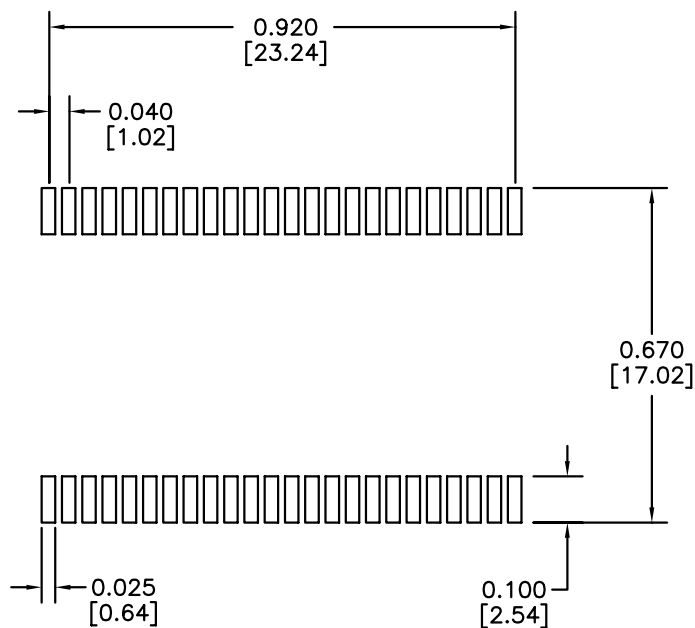

DIMENSIONS: Inch [mm]
 RECOMMENDED SOLDER PAD DIMENSIONS

HALO/PBL	TITLE TRANSFORMER MODULE		SIGNATURES		DATE	REV.	DESC.	DATE
	FOR T3/DS3/E3/STS-1		DRAWN PETER LU		4/27/05	B	DIM CORRECTION	10/14/05
	PART NO. TG01-0406NV6RL		CHECKED					
	SCALE NONE		PAGE 2 OF 2		APPROVED			
CALIFORNIA, USA KOWLOON, HONG KONG SINGAPORE		FILE 0406NV6RL.DWG						