

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0705550058

Status:

Active

Overview:

SL™ Modular Connectors

Description:

2.54mm Pitch SL™ Header, Single Row, Right Angle, 3.05mm Pocket, Shrouded, with Press-fit Plastic Peg, 24 Circuits, 0.38µm Gold (Au) Selective Plating, Tin (Sn) PC Tail Plating

- Documents:
- 3D Model

Drawing (PDF)

Product Specification PS-70400 (PDF)

Product Specification PS-70541 (PDF)

Test Summary TS-70541-001 (PDF)

Test Summary TS-70541-100 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

General

Product Family

Series

Application

Overview

Product Name

UPC

PCB Headers

70555

Signal, Wire-to-Board

SL™ Modular Connectors

SL™

800753624238

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

Flammability

Glow-Wire Compliant

Guide to Mating Part

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Net Weight

Number of Rows

Orientation

PC Tail Length

PCB Locator

PCB Retention

PCB Thickness - Recommended

Packaging Type

Pitch - Mating Interface

Plating min - Mating

Plating min - Termination

Polarized to Mating Part

Shrouded

Stackable

Temperature Range - Operating

Termination Interface: Style

No

24

24

Black

50

94V-0

No

Yes

Yes

Brass, Phosphor Bronze

Gold

Tin

High Temperature Thermoplastic

5.307/g

1

Right Angle

3.30mm

Yes

Yes

1.60mm

Tube

2.54mm

0.381µm

1.905µm

Yes

Fully

No


-40°C to +105°C

Through Hole

Electrical

Current - Maximum per Contact

3.0A

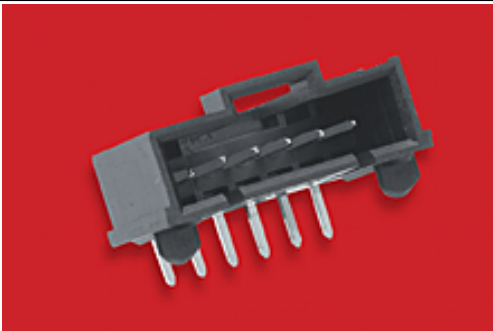

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Contains SVHC(2014

December 17): No

Halogen-Free

Status

Not Low-Halogen

Need more information on product

environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

70555 Series

Mates With

SL™ Crimp Housing [70066](#) Option N, [70066](#)

Option G, [70430](#) Option G, [70400](#) Option G

Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	001
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260
Material Info	
Old Part Number	A-70555-0058
Reference - Drawing Numbers	
Product Specification	PS-70400, PS-70541
Sales Drawing	SDA-70555-****
Test Summary	TS-70541-001, TS-70541-100

This document was generated on 06/25/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION