

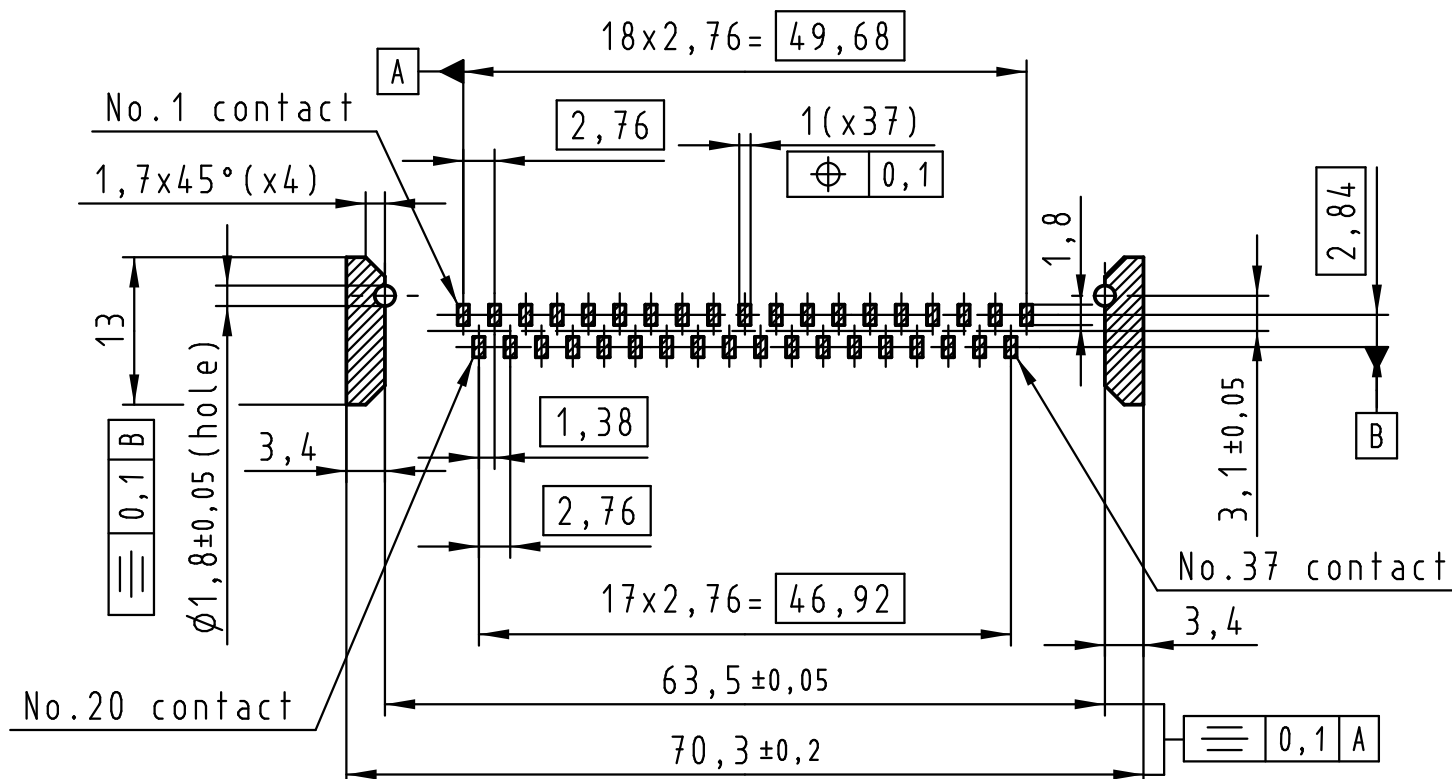
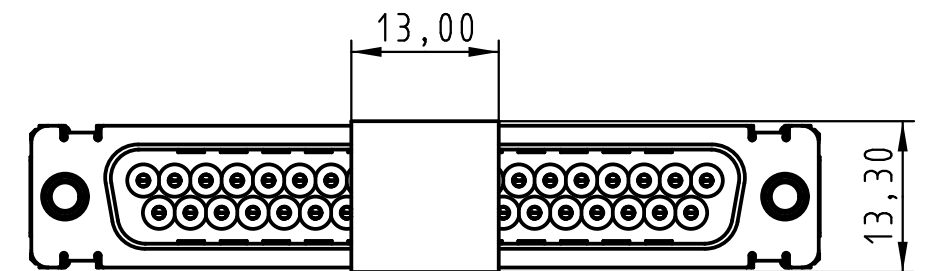
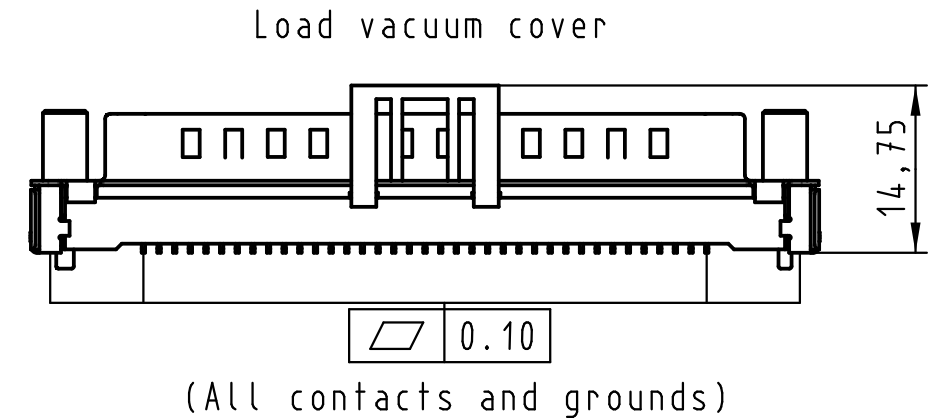
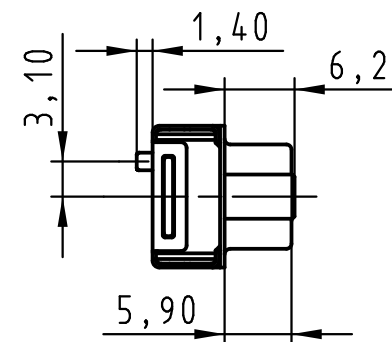
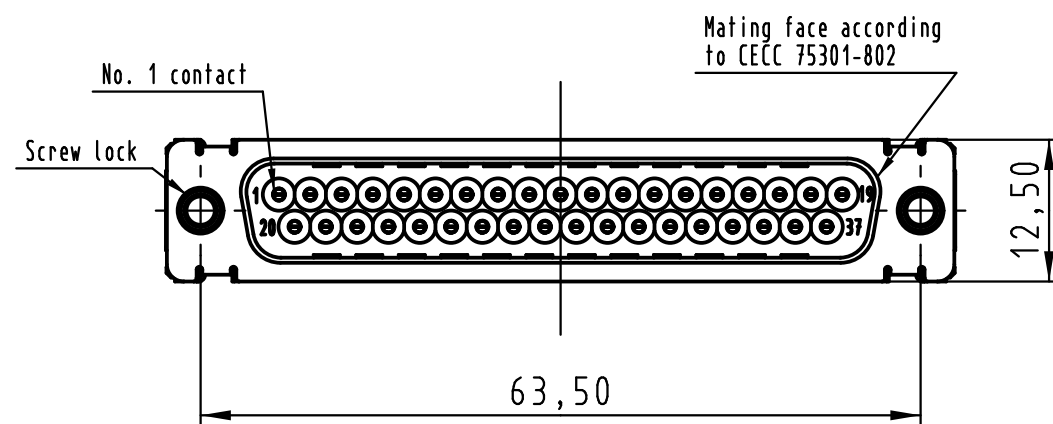


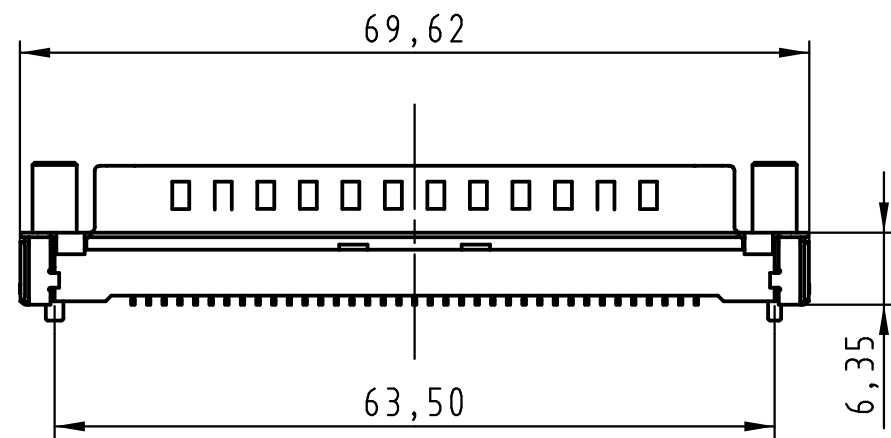




PCB layout, component side

Max. Temperature: 260° during 10 seconds.

0955 429 3821 741	1	M3	Black insulator	Reel Packaging: 140 connectors (See details on page2/2)			
0955 429 3822 741	1	4-40 UNC					
0955 429 6821 741	2	M3					
0955 429 6822 741	2	4-40 UNC					
0955 429 7821 741	3	M3					
0955 429 7822 741	3	4-40 UNC					
Part number	PL	Screw lock	Index designation				
 All Dimensions in mm Original Size DIN A 3		Techn. Character.		Free size tolerances			
			Dat.	Name	Scale 1.5:1	D-Sub SMT, 37 poles Male, Straight with screw locks and ground pads	
			Detail.	25-Oct-11			Johnson.S
			Insp.	17-Nov-11			Steven.W
			Stand.	17-Nov-11			Steven.W
			Zhuhai HARTING Limited			TB 09 55 429 x82x	
EC04070	17-Nov-11	Johnson.S					
Mod.	Dat.	Name	Sub.			Page 1/2	

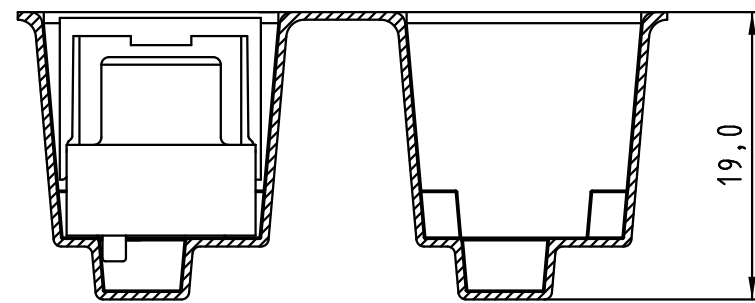

Detail A

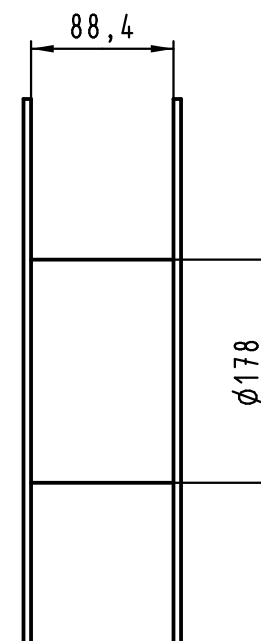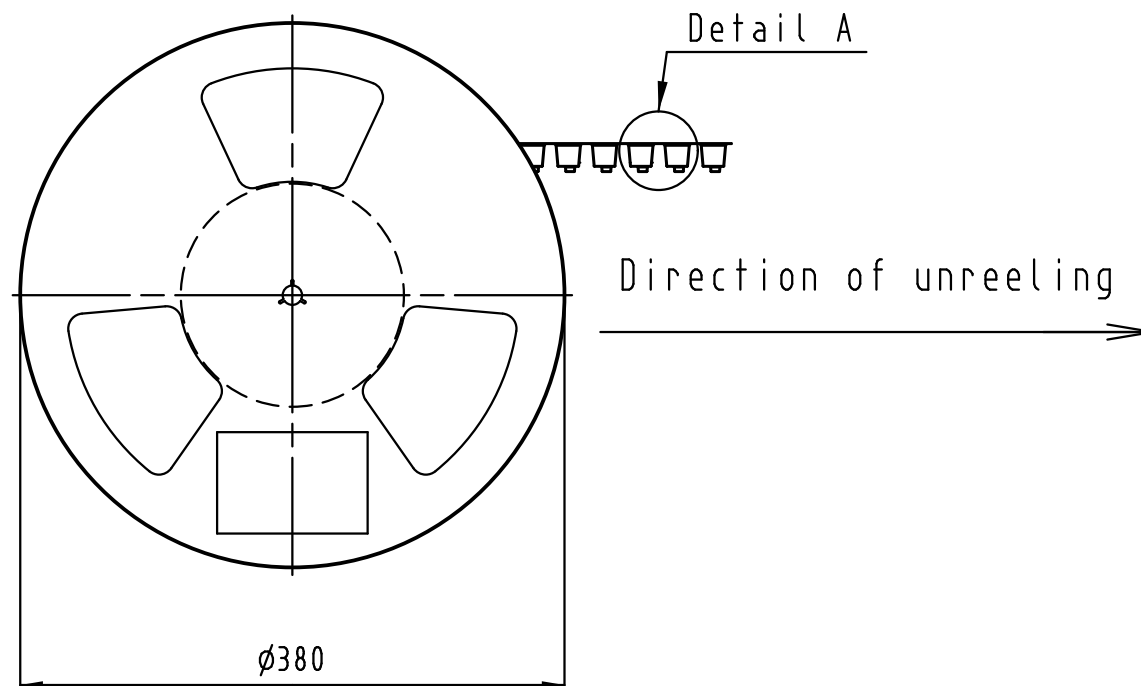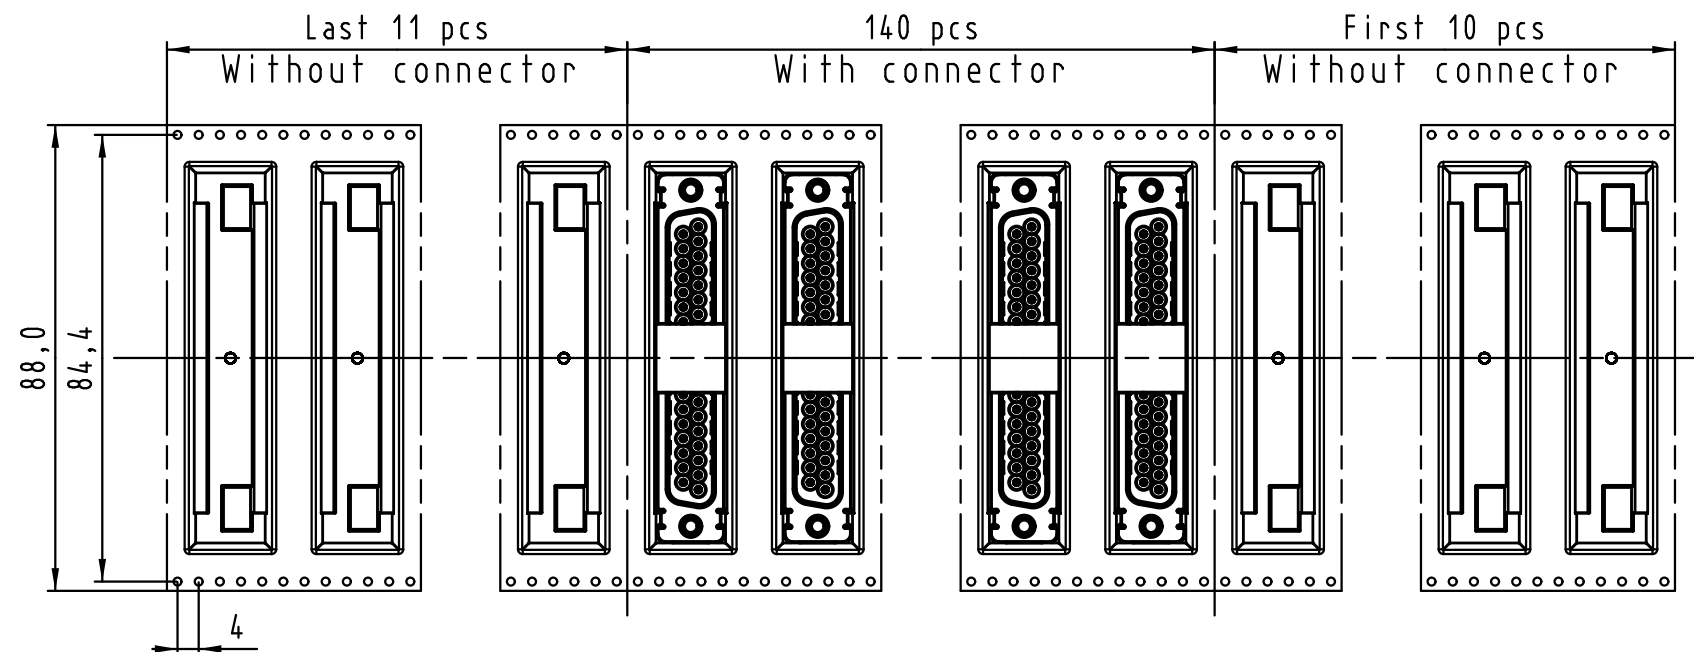

See TB 09 55 429 x82x folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2.

0955 429 3821 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 429 3822 741	1	4-40 UNC		
0955 429 6821 741	2	M3		
0955 429 6822 741	2	4-40 UNC		
0955 429 7821 741	3	M3		
0955 429 7822 741	3	4-40 UNC		
Part number	PL	Screw lock	Index designation	

			All Dimensions in mm Original Size DIN A 3			Techn. Character.			Free size tolerances		
				Dat.	Name	Scale	D-Sub SMT, 37 poles Male, Straight with screw locks and ground pads				
			Detail.	25-Oct-11	Johnson.S						
			Insp.	17-Nov-11	Steven.W						
			Stand.	17-Nov-11	Steven.W						
							TB 09 55 429 x82x		Page 2 / 2		
EC04070	17-Nov-11	Johnson.S	Zhuhai HARTING Limited				Sub.				
Mod.	Dat.	Name									