

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
V3L-2226

CQ-X1507

5

V3L-2226

M

DRAWING
NUMBER

ISSUE
X 2

3

REPLACES X68576-V3L

RELEASE NO. PR-7488

CHECK

CHECK

2 NOV 78

C E B

CHECK

31 OCT 78


CHECK

W J M

DRAWN

FO-52848-A

REVISIONS
A CO 59221
SMA
29 SEPT 86
B CO 76417
J A L
20 OCT 93

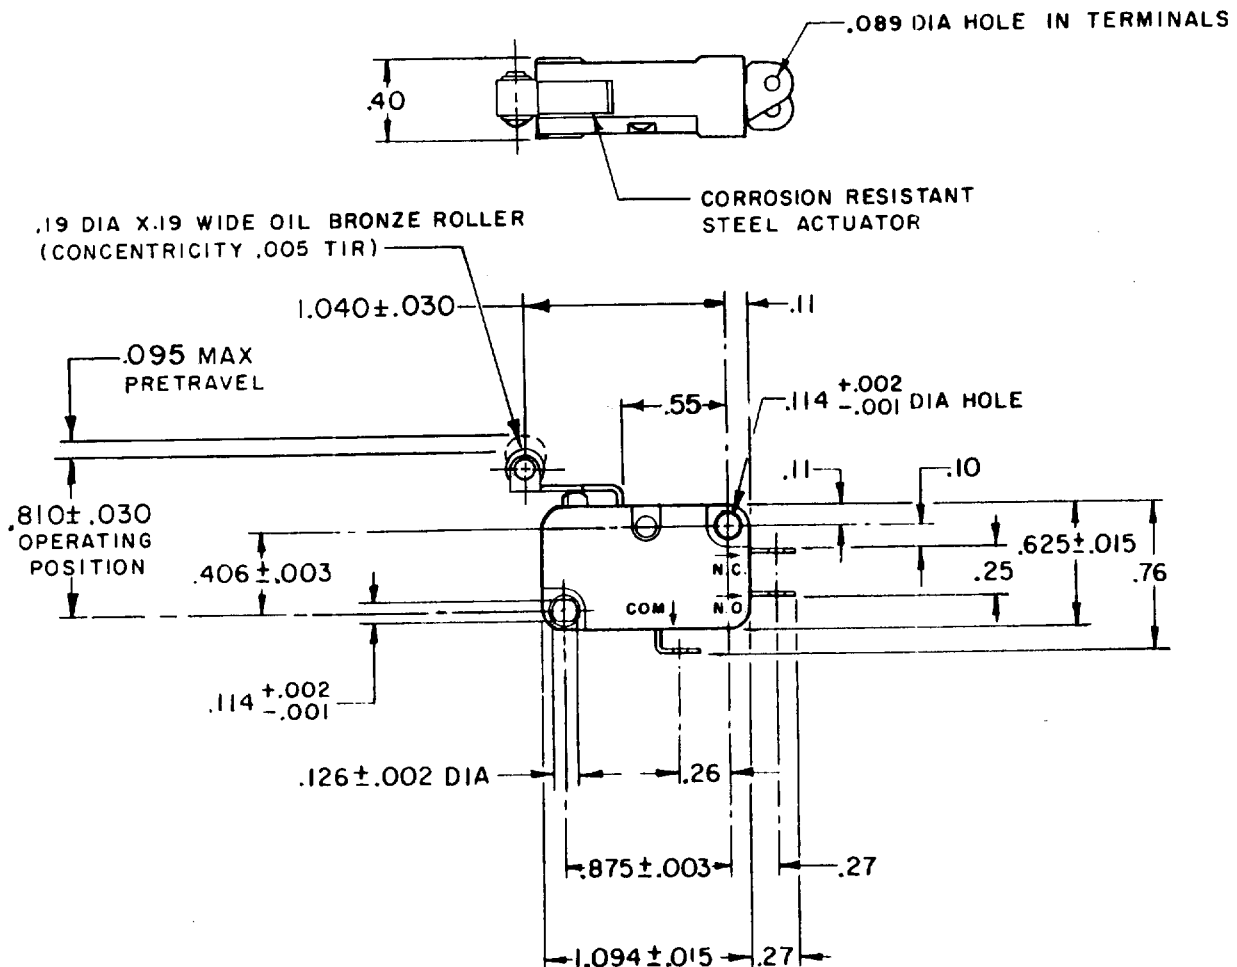

NOTE -

1 - TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE----- 40 GRAM MAX

RELEASE FORCE----- 2 GRAM MIN

DIFFERENTIAL TRAVEL----- .028 MAX

OVERTRAVEL----- .050 MIN

RELEASE TRAVEL----- .014 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L131 10A-1/4HP-125 OR 250 VAC
1/2A-125 VDC; 1/4A-250 VDC
3A-125 VAC "L"



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04	
ONE PLACE	X,X	0.4/.016	X,X
TWO PLACES	X,X,X	0.15/.006	X,X,X
THREE PLACES	X,X,X,X		X,X,X,X
ANGLES			

DESIGN UNITS ☐ SI METRIC

☒ US CUSTOMARY

WEIGHT