
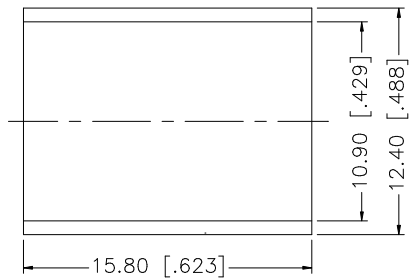
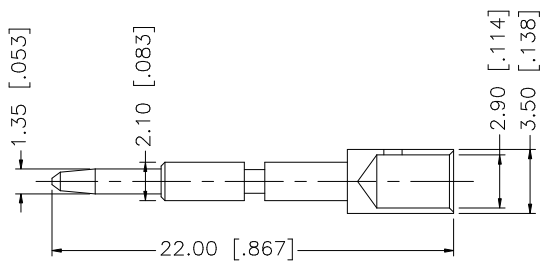
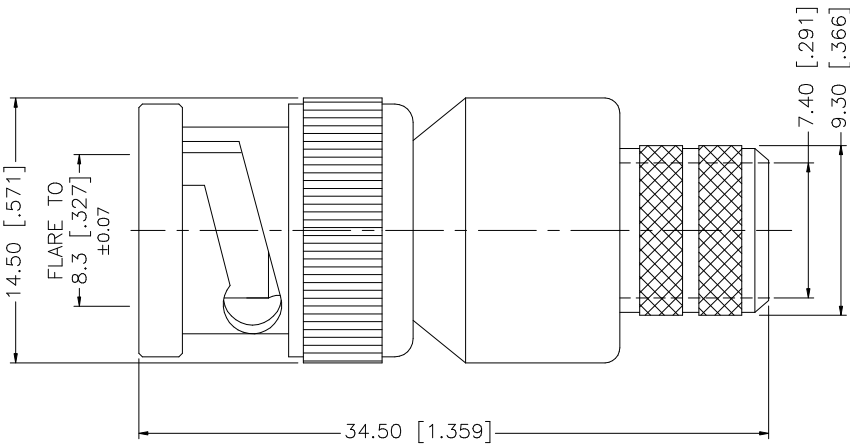


REV.	DATE	DESCRIPTION
A	05/01/04	UPDATE DRAWING FORMAT
B	11/06/06	REVISE CRIMP NOTE 2 TO .118" HEX CRIMP

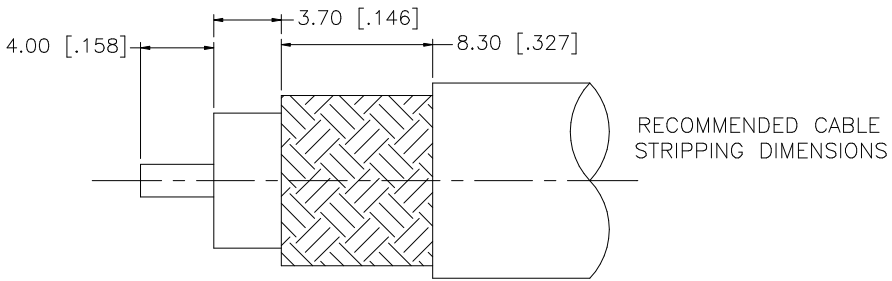

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .118"

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex							
8					DRAWN	G.R.S.	11/06/06									
7					CHECKED			PART DESCRIPTION BNC CRIMP PLUG (FOR BELDEN 8214, 9913, 9914)								
6					ISSUED											
5					SHEET	1 OF 1								PART NO. 112563		
4	FERRULE	COPPER	NICKEL		1											
3	CONTACT PIN	BRASS	GOLD		1	CAD FILE		DWG. NO.		112563.DWG	REV.	B	SIZE	A	SCALE	NA
2	INSULATOR	TEFLON	NATURAL		1	C:/112/112563.DWG										
1	BODY	BRASS	NICKEL	1												
				DESCRIPTION		MATERIAL		FINISH		QTY						