
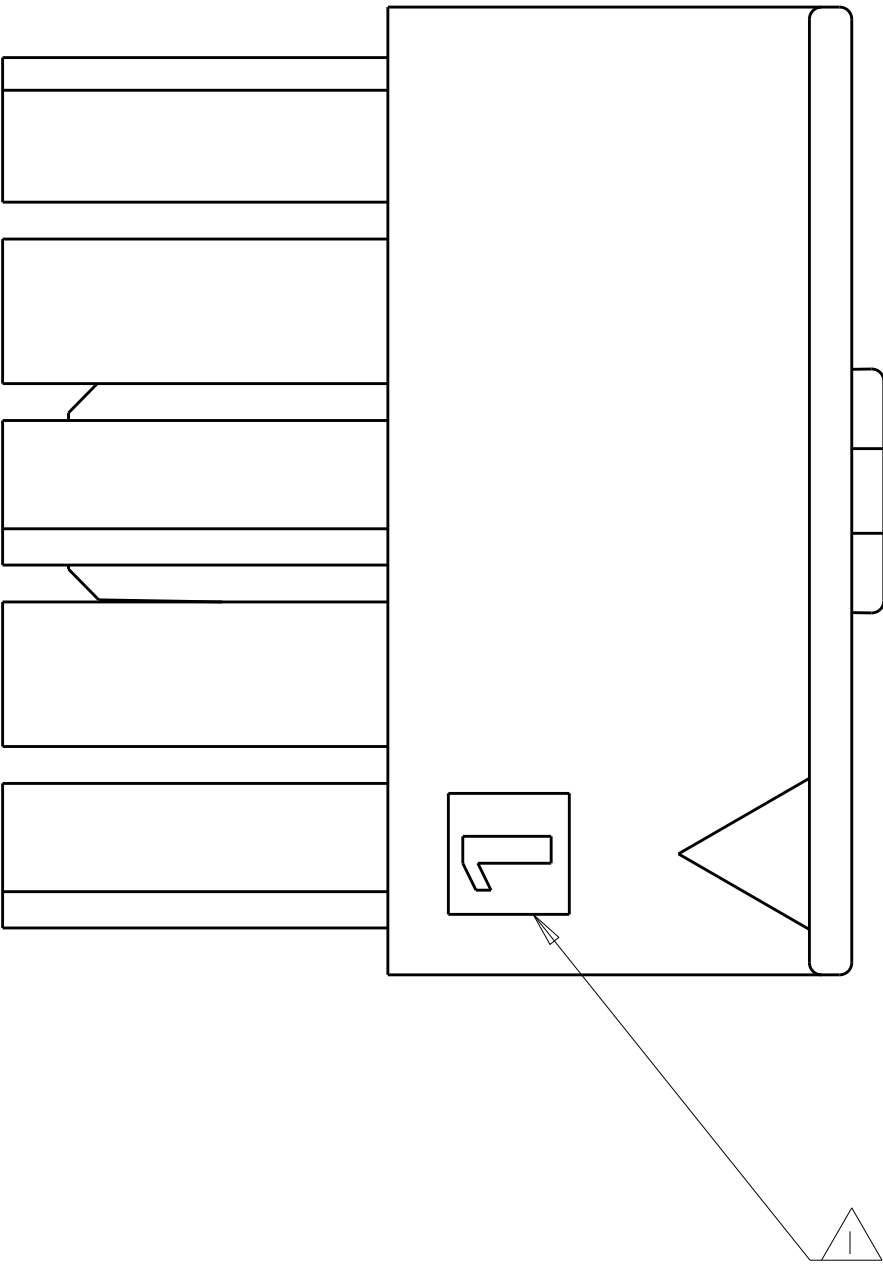
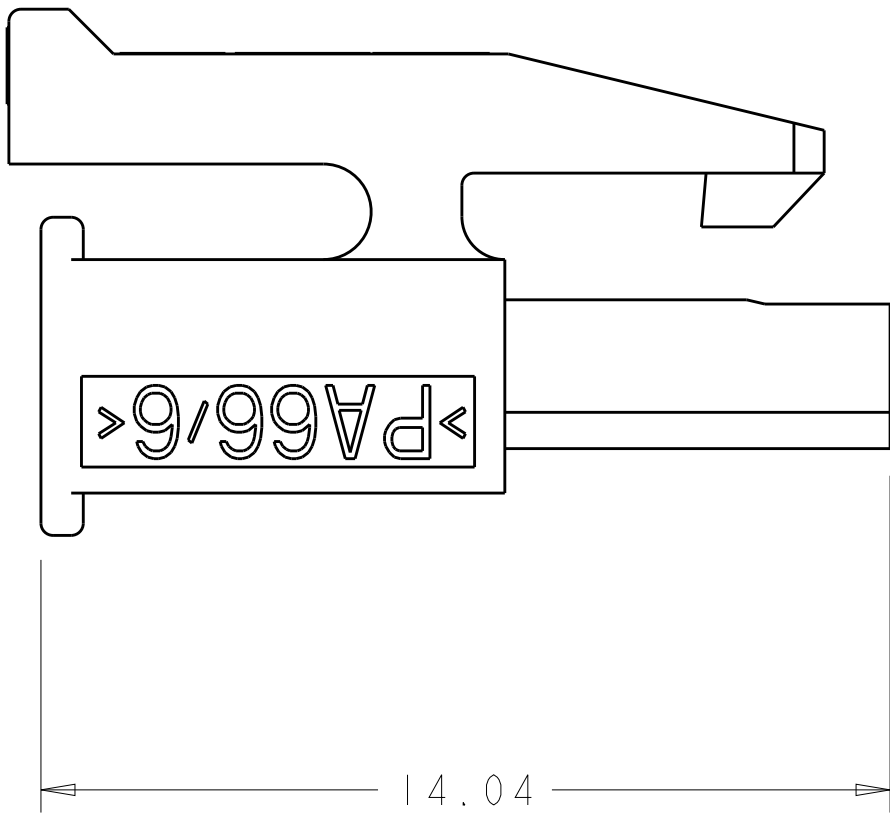
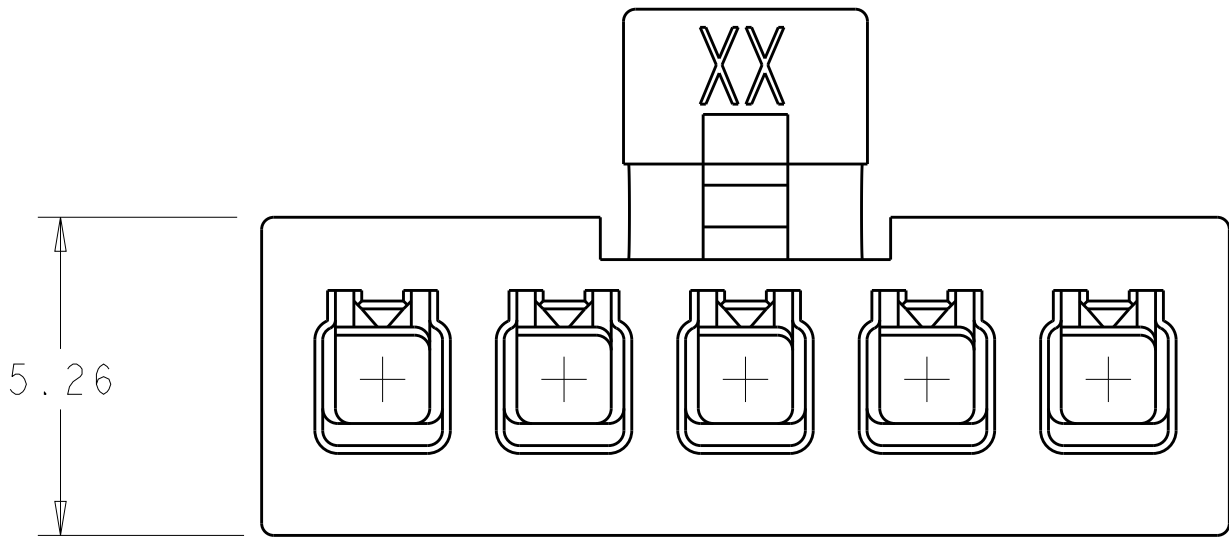
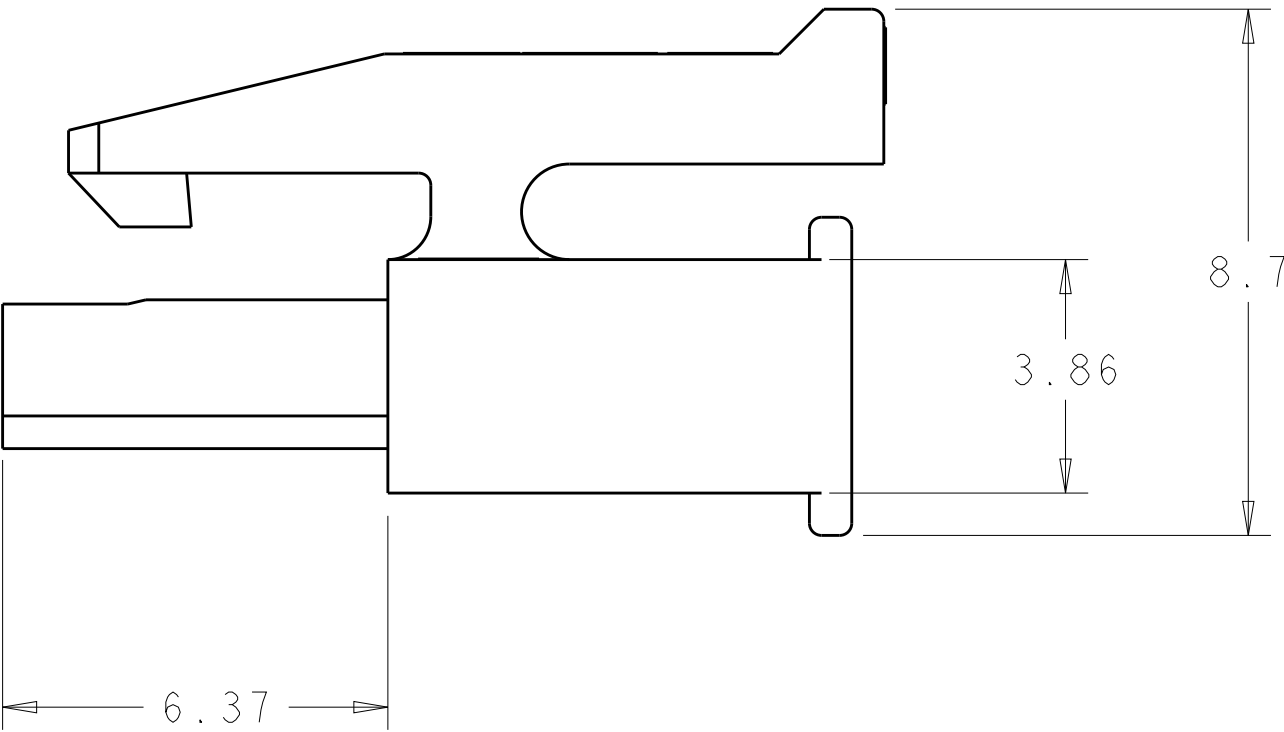
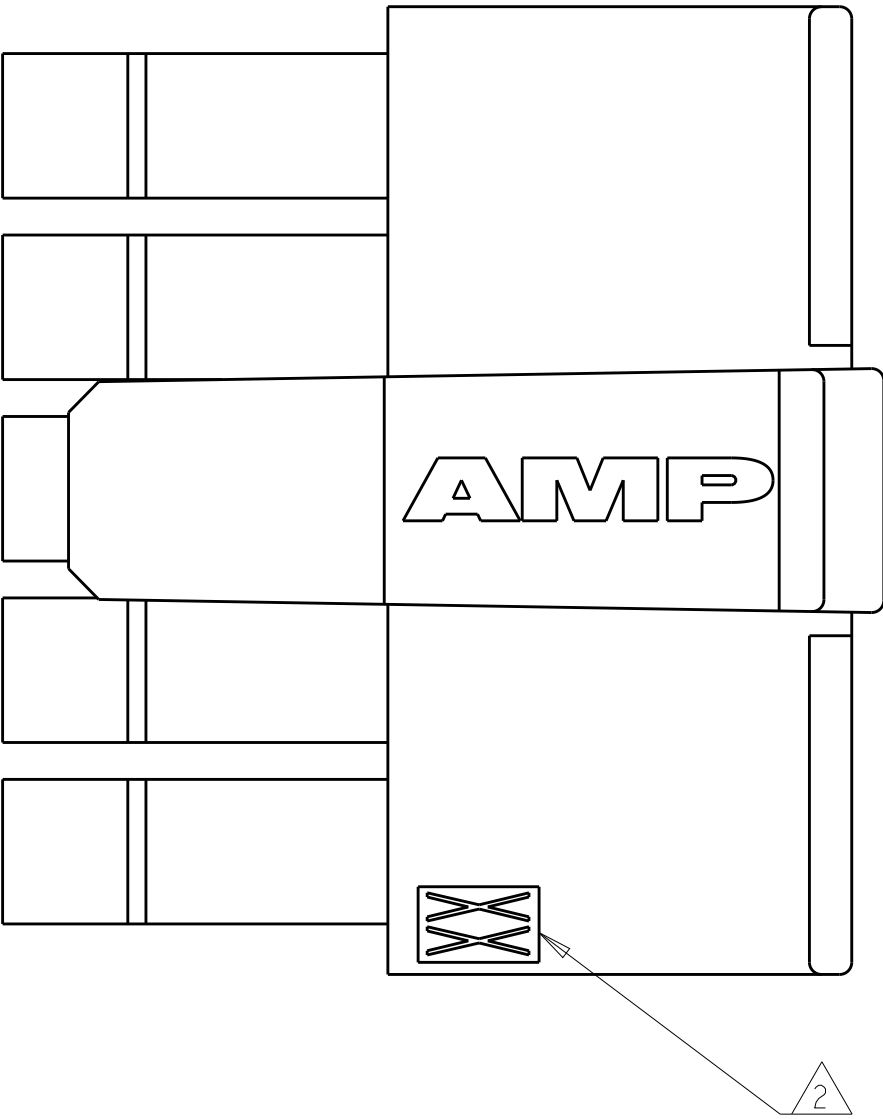


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		D	REVISED PER ECO-17-000100	11MAR2017	CX	DZ

- ① CIRCUIT 1 IDENTIFIER, LOCATED APPROXIMATELY AS SHOWN.
- ② LAST CIRCUIT IDENTIFIER, LOCATED APPROXIMATELY AS SHOWN.
- ③ MATERIAL NYLON66/6 V0 UL94
- ④ MATERIAL PA66 V0 GW UL94.

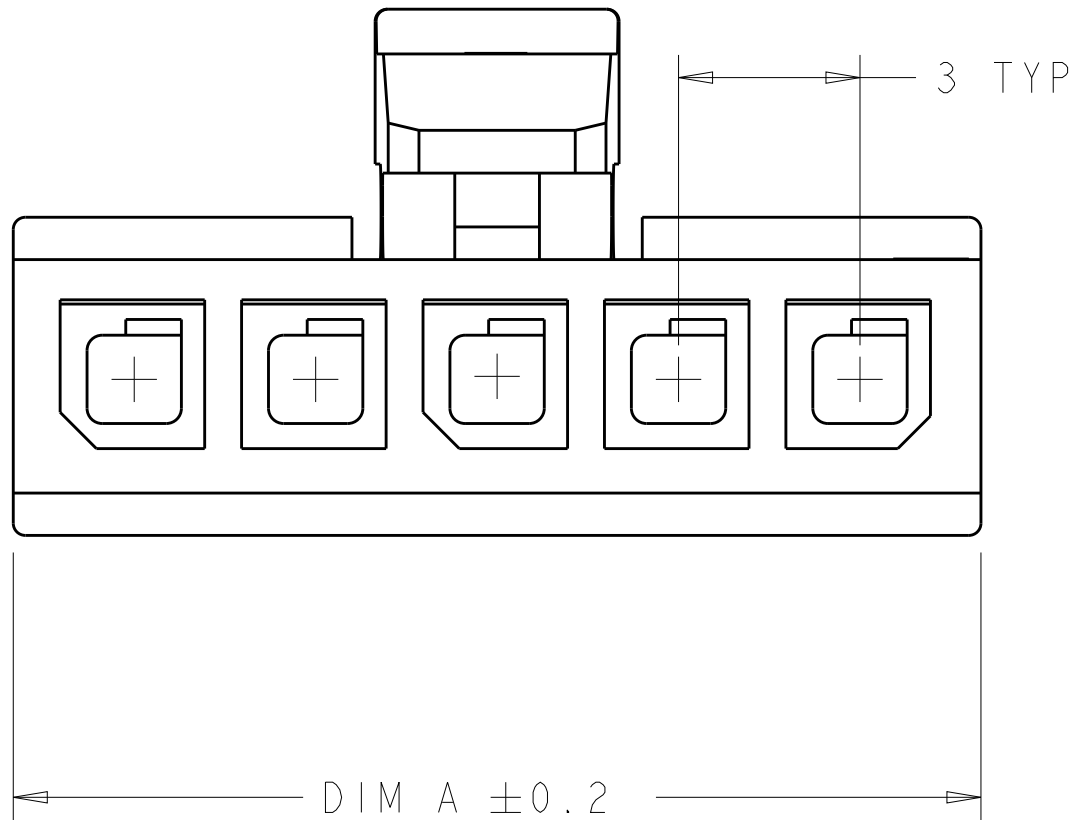

④	444.06	13	4	2-1445022-4
	363.34	10	3	2-1445022-3
	282.61	7	2	2-1445022-2
③	1091.66	37	12	1-1445022-2
	1011.3	34	11	1-1445022-1
	929.64	31	10	1-1445022-0
	847.19	28	9	1445022-9
	768.32	25	8	1445022-8
	686.23	22	7	1445022-7
	605.73	19	6	1445022-6
	525.93	16	5	1445022-5
	444.06	13	4	1445022-4
	363.34	10	3	1445022-3
	282.61	7	2	1445022-2
REMARK	VOLUME mm ³	DIM A	NO OF POS.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. WHITAKER 14AUG2001	 TE Connectivity										
DIMENSIONS:		CHK C. JONES 14AUG2001											
mm		APVD C. JONES 14AUG2001					NAME						
		RECEPTACLE HOUSING, 2 TO 12 POSITION, SINGLE ROW, MICRO MATE-L-LOK(TM)											
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO							
0 PLC ±		108-1836											
1 PLC ±		APPLICATION SPEC	A 00779 C=1445022										
2 PLC ±0.13		114-13000											
3 PLC ±		WEIGHT	CUSTOMER DRAWING										
4 PLC ±		-											
ANGLES		FINISH	SCALE 8:1 SHEET 1 OF 1 REV D										
±1°		-											
MATERIAL NYLON, UL94V-0 BLACK													