
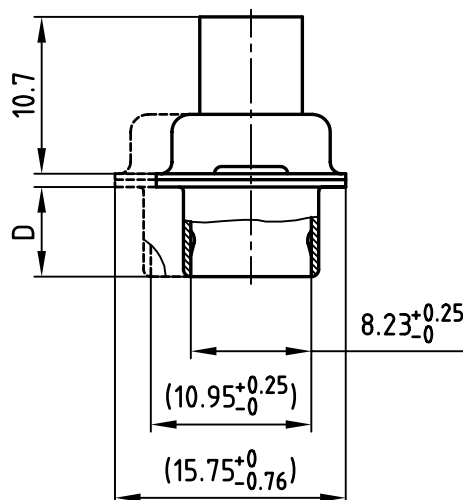
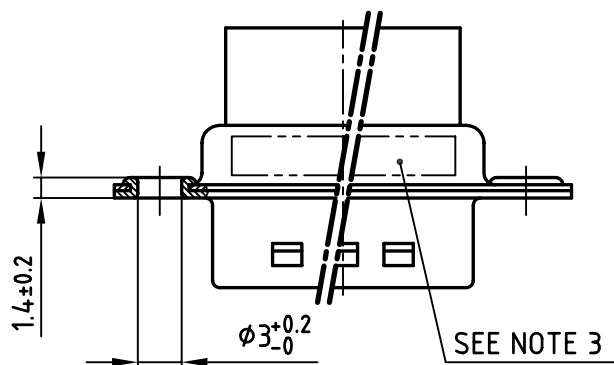


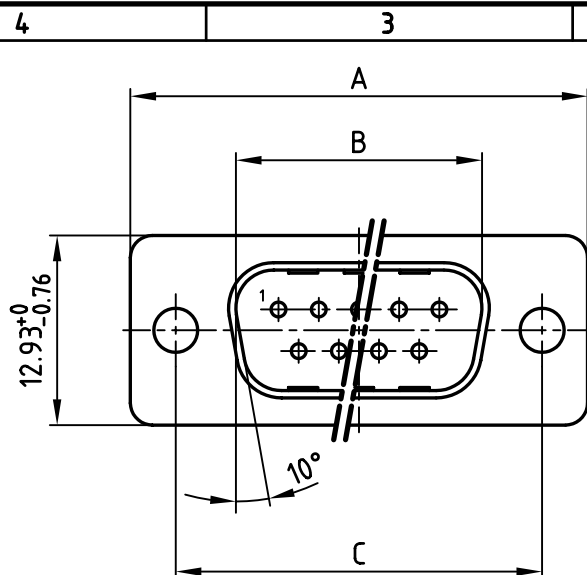

used for: D-SUB

NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

Dimensions in (---) = 50pos.

No. of Pos.	A -0.76	B +0.25	C	D -0.3	Part-NO.
9	31.19	16.79	25.00 ^{+0.12} / _{-0.13}	6.12	163X10019X
15	39.52	25.12	33.30 ^{+0.15} / _{-0.1}	6.12	163X10029X (163X10029X-G)
25	53.42	38.84	47.04 ±0.13	5.99	163X10039X (163X10039X-G)
37	69.70	55.30	63.50 ±0.13	5.99	163X10049X
50	67.31	52.68	61.10 ^{+0.14} / _{-0.11}	5.99	163X10059X

(b)

Directive 2002/95/EC
"RoHS"
Compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance				scale: 2:1	
1 x b	Ä 3084	21.08.08	HS	2001	date	name		material:	SEE NOTES
				drawn	11.04.	Parei		title:	
				appd.	11.04.	E. Mickenbecker			
				norm	DIN 41652				
				d-old	KAT1105A				
								dwg no:	AutoCAD 2000
									DIN-A
									4
									sh: 1/1
rev.	description	date	name					part no:	SEE TABLE

CONEC®

D-SUB Plug connector
CRIMP STYLE 9 - 50 pos.

16K1A178A