


MAK - Non-Contact Magnetic Switches



Switch		Standard Version		New UL Version	
Standard Version	New UL Version	Standard Version	New UL Version	Standard Version	New UL Version
MAK-4236-3 649.0642.315 3 m PVC cable	MAK-4236-BCD-3 649.0642.315 3 m PVC cable	MAK-5236-3 649.0652.316 3 m PVC cable	MAK-5236-BCD-3 649.0652.327 3 m PVC cable	MAK-5336-3 649.0653.317 3 m PVC cable	MAK-5336-BCD-3 649.0653.323 3 m PVC cable
MAK-4236-6 649.0642.302 6 m PVC cable	MAK-4236-BCD-6 649.0642.319 6 m PVC cable	MAK-5236-6 649.0652.307 6 m PVC cable	MAK-5236-BCD-6 649.0652.328 6 m PVC cable	MAK-5336-6 649.0653.311 6 m PVC cable	MAK-5336-BCD-6 649.0653.324 6 m PVC cable
MAK-4236-9 649.0642.303 9 m PVC cable	MAK-4236-BCD-9 649.0642.320 9 m PVC cable	MAK-5236-9 649.0652.308 9 m PVC cable	MAK-5236-BCD-9 649.0652.329 9 m PVC cable	MAK-5336-9 649.0653.312 9 m PVC cable	MAK-5336-BCD-9 649.0653.325 9 m PVC cable
MAK-4236-STK 649.0642.305 4-pin connector	MAK-4236-BCD-M8 649.0642.321 4-pin connector	MAK-5236-STK 649.0652.309 4-pin connector	MAK-5236-BCD-M8 649.0652.322 4-pin connector	MAK-5336-STK 649.0653.313 4-pin connector	MAK-5336-BCD-M12 649.0653.326 4-pin connector

Actuator and Safety Controller Sold Separately

-5 °C/+70 °C	-5 °C/+70 °C	-5 °C/+70 °C	-5 °C/+70 °C	-5 °C/+70 °C	-5 °C/+70 °C
+23 °F/+158 °F	+23 °F/+158 °F	+23 °F/+158 °F	+23 °F/+158 °F	+23 °F/+158 °F	+23 °F/+158 °F
IP67	IP67	IP67	IP67	IP67	IP67
PA 6.6	PA 6.6	PBT	PBT	PA 6.6	PA 6.6
4 mm	4 mm	3 mm	3 mm	3 mm	3 mm
14 mm	14 mm	14 mm	14 mm	14 mm	14 mm
Actuator					
TK-42-CD 640.2042.310	TK-42-CD 640.2042.310	TK-52-CD/2 640.2052.311	TK-52-CD/2 640.2052.311	TK-43-CD 640.2043.312	TK-43-CD 640.2043.312
Safety Controllers					
639.2701.306	639.2701.306	639.2701.306	639.2701.306	639.2701.306	639.2701.306
639.2702.307	639.2702.307	639.2702.307	639.2702.307	639.2702.307	639.2702.307

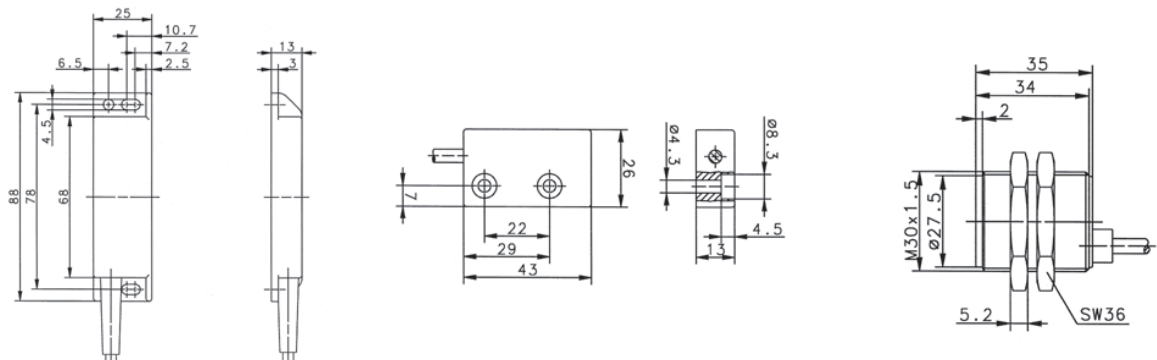

Drawing dimensions in mm