

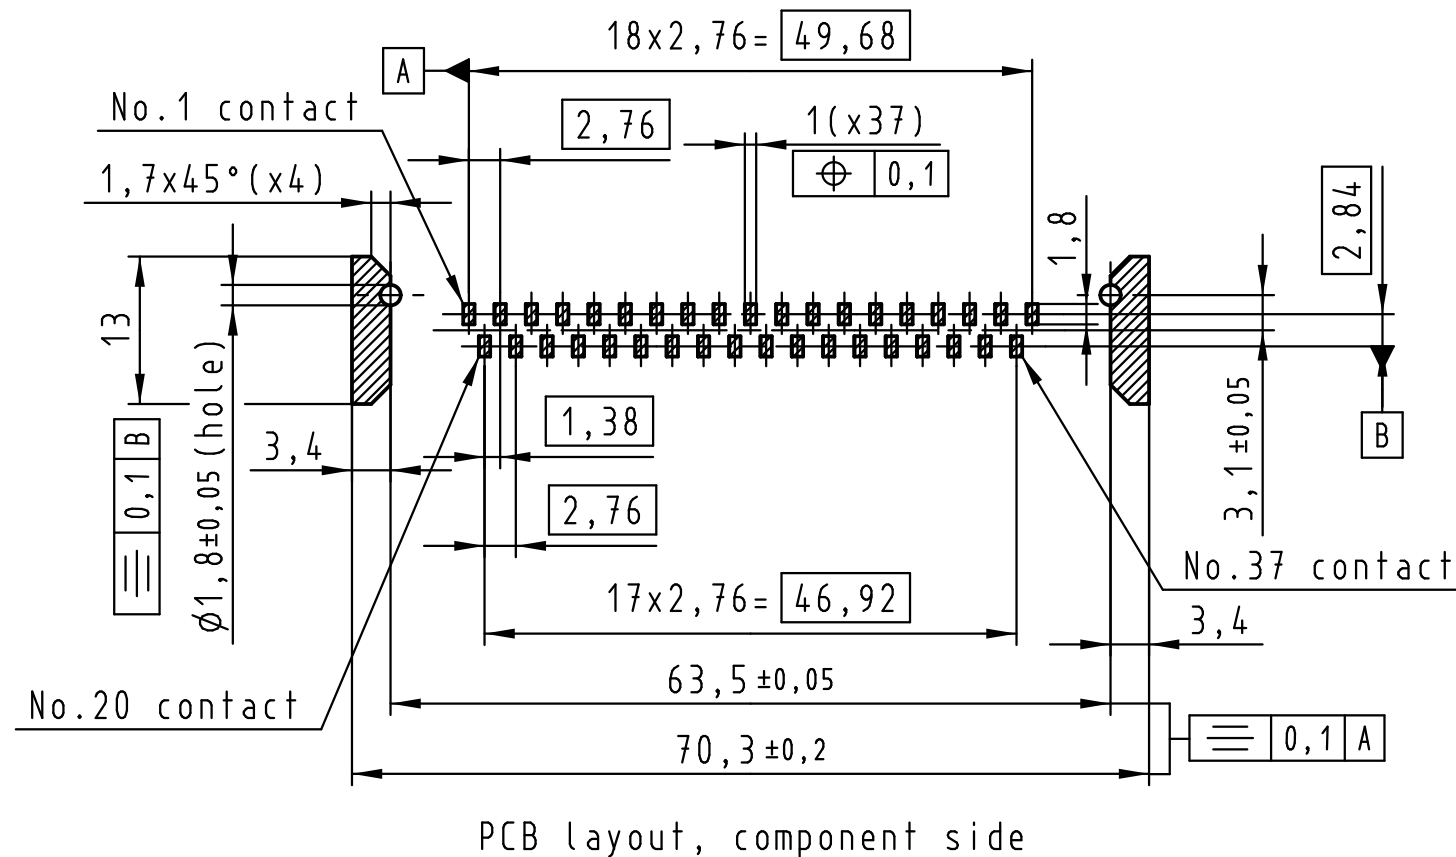
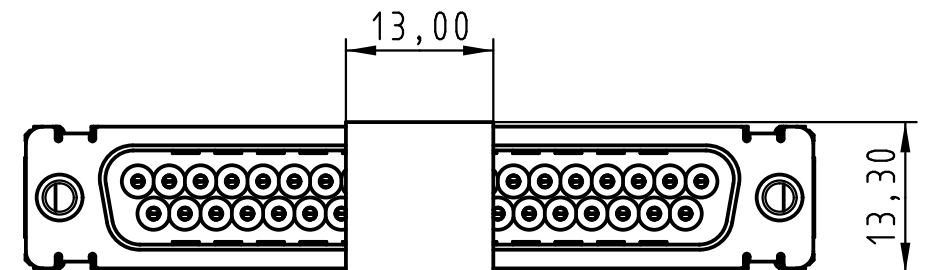
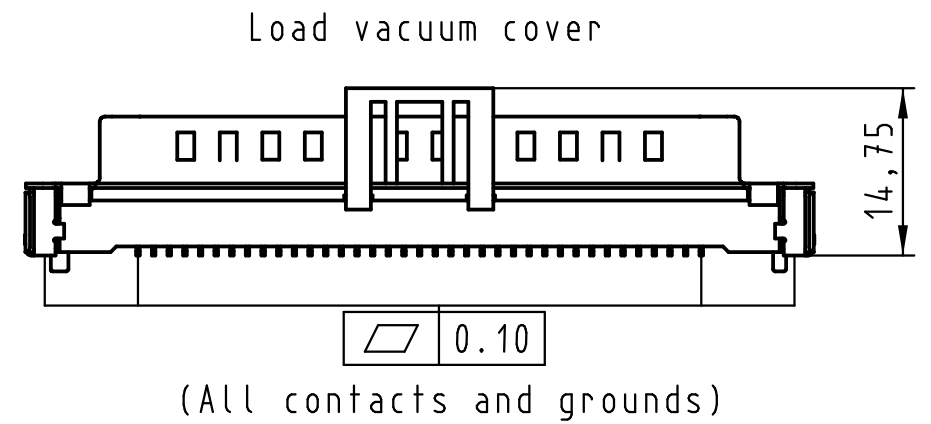

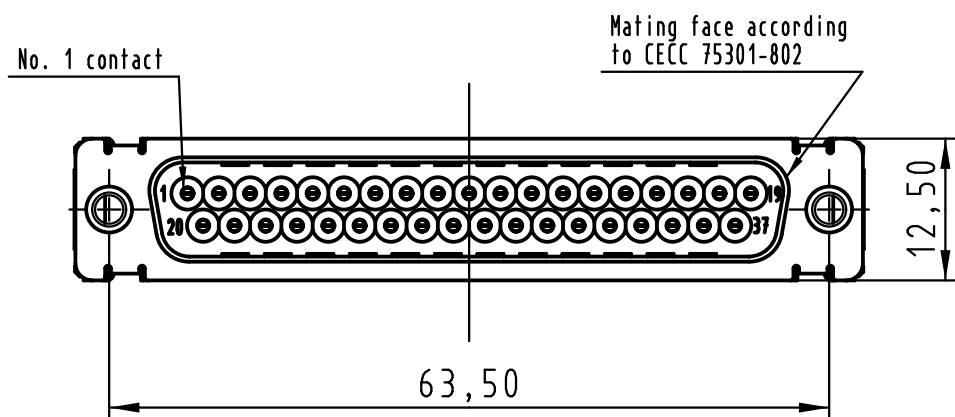



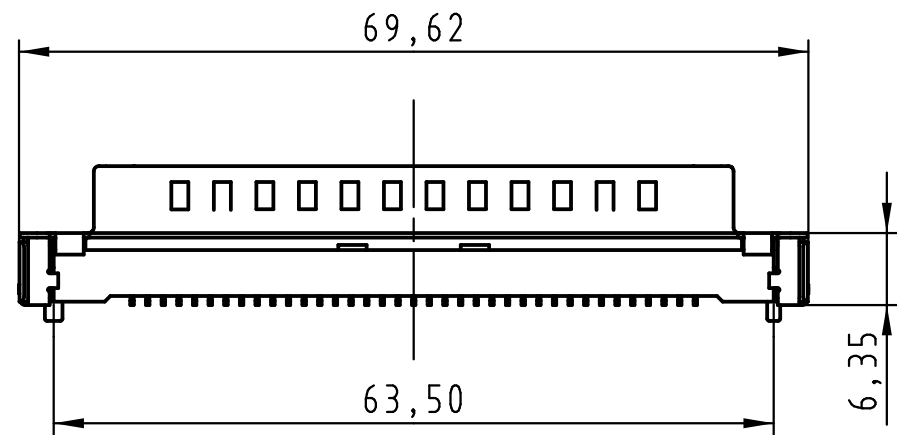


Max. Temperature: 260° during 10 seconds.

0955 429 3811 741	1	M3	Black insulator	Reel Packaging: 140 connectors (See details on page2/2)				
0955 429 3812 741	1	4-40 UNC						
0955 429 6811 741	2	M3						
0955 429 6812 741	2	4-40 UNC						
0955 429 7811 741	3	M3						
0955 429 7812 741	3	4-40 UNC						
Part number	PL	Nut	Index designation					
 All Dimensions in mm Original Size DIN A 3			Techn. Character.		Free size tolerances			
				Dat.	Name	Scale 1.5:1	D-Sub SMT, 37 poles Male, Straight with nuts and ground pads	
			Detail.	25-Oct-11	Johnson.S			
			Insp.	17-Nov-11	Steven.W			
			Stand.	17-Nov-11	Steven.W			
			Zhuhai HARTING Limited 					TB 09 55 429 x81x
EC04070	17-Nov-11	Johnson.S	Sub.					
Mod.	Dat.	Name						

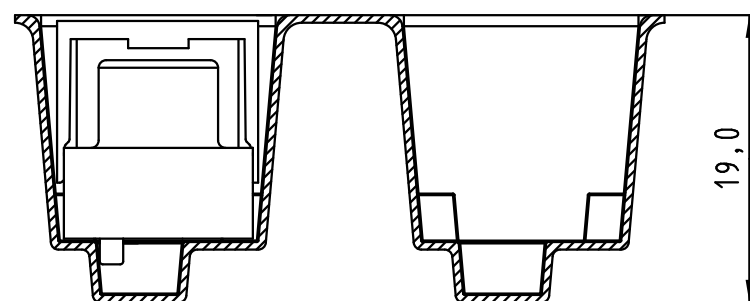


Detail A

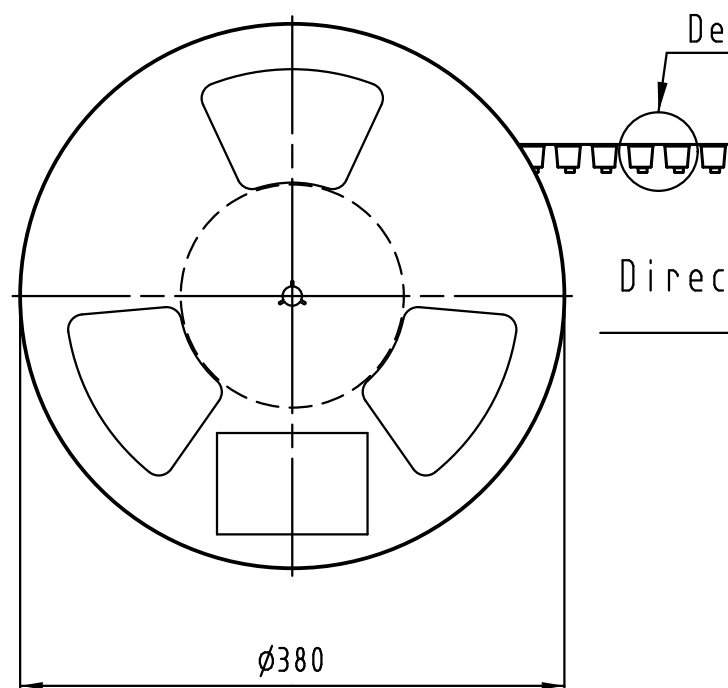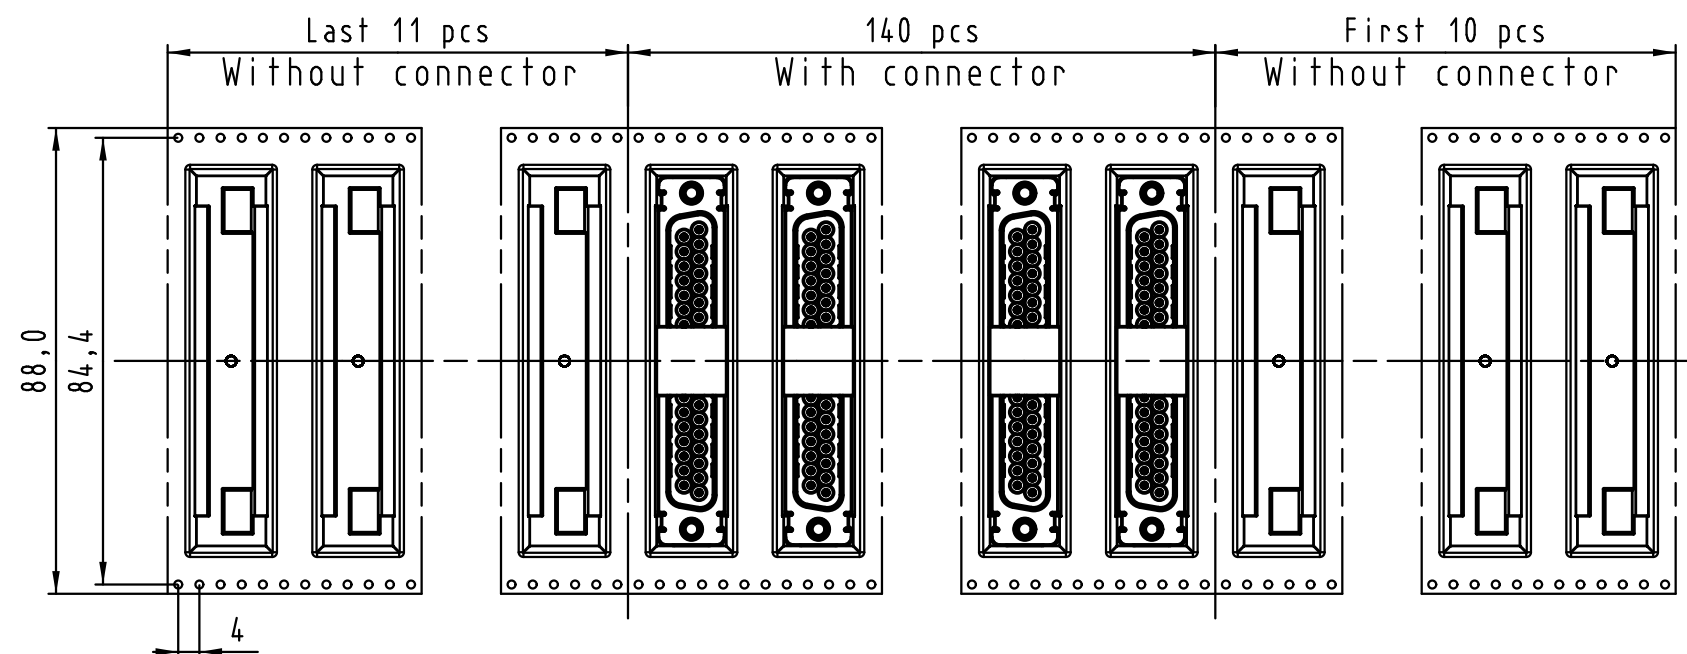

Detail A

Direction of unreeling →

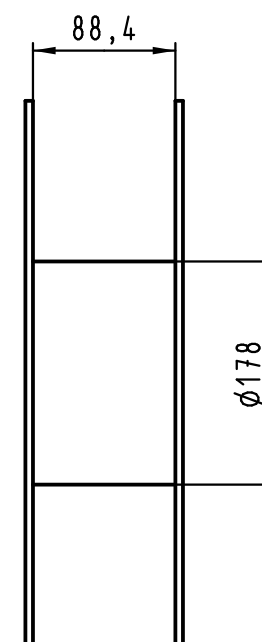

See TB 09 55 429 x81x folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2.

0955 429 3811 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 429 3812 741	1	4-40 UNC		
0955 429 6811 741	2	M3		
0955 429 6812 741	2	4-40 UNC		
0955 429 7811 741	3	M3		
0955 429 7812 741	3	4-40 UNC	Index designation	
Part number	PL	Nut		

 All Dimensions in mm Original Size DIN A 3			Techn. Character.			Free size tolerances			
				Dat.	Name	Scale	D-Sub SMT, 37 poles Male, Straight with nuts and ground pads		
			Detail.	25-Oct-11	Johnson.S				
			Insp.	17-Nov-11	Steven.W				
			Stand.	17-Nov-11	Steven.W				
			Zhuhai HARTING Limited 			TB 09 55 429 x81x		Page 2/2	
EC04070	17-Nov-11	Johnson.S				Sub.			
Mod.	Dat.	Name							