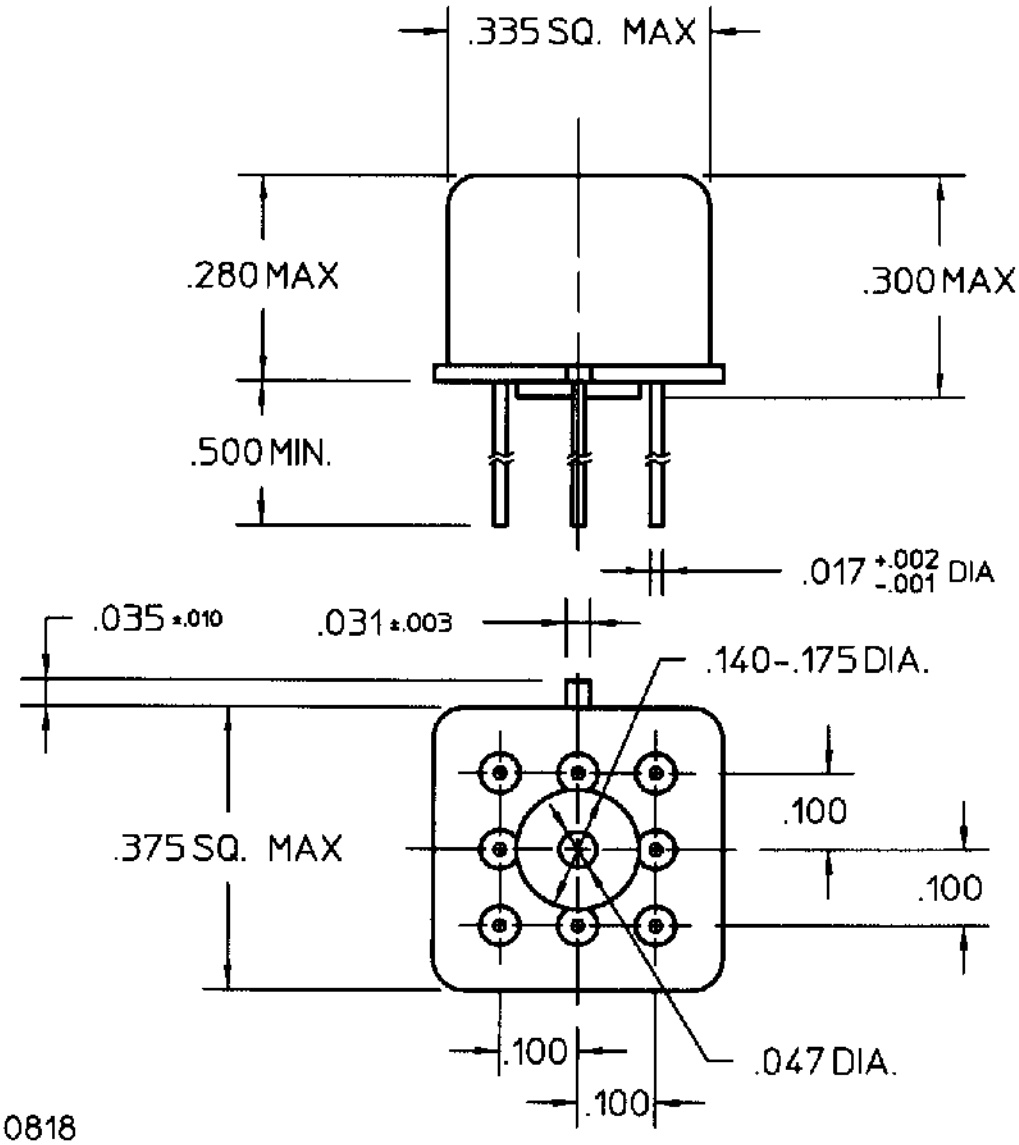


REV. 0
DCO 140818

COIL: @ 25°C

| | |
|---|---|
| RESISTANCE | 50 OHMS ± 10% |
| NOMINAL VOLTAGE | 5.0 VDC |
| MUST OPERATE | 2.7 VDC |
| MUST RELEASE | 1.4 VDC MAX, 0.22 VDC MIN. |

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX
RELEASE TIME 4.0 MS MAX
CONTACT BOUNCE 1.5 MS MAX

## CUSTOMER DATA SHEET




TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 12/17/98 CK. 12/17/98

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/18-037L

TYPE JMGAD RELAY

# JMGACD-5LW