



A diagram of a 10-pin D-sub connector. It features a D-shaped housing with a central pin inserted into the top. The connector has five pins on the bottom and five pins on the side.

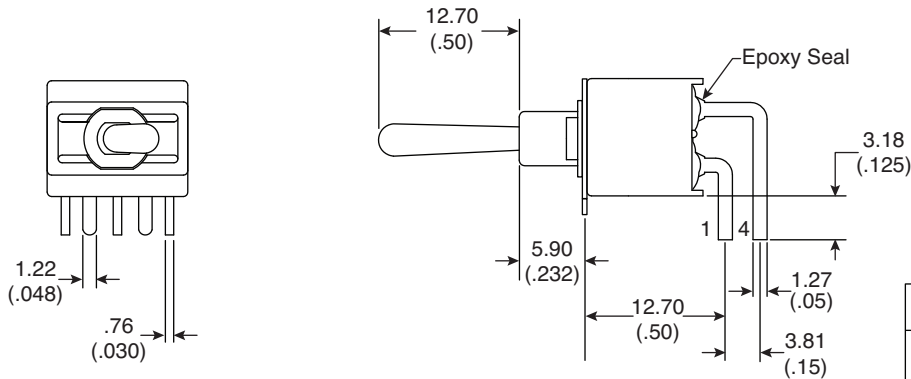

Technical drawing of a rectangular plate with the following dimensions and features:

- Overall width: 12.70 (.50)
- Overall height: 11.43 (.45)
- Top edge features three holes labeled 4, 5, and 6.
- Bottom edge features three holes labeled 1, 2, and 3.
- Distance from the top edge to the center of the bottom holes: 3.28 (.129)
- Distance from the center of hole 1 to the center of hole 2: 4.70 (.185)
- Distance from the center of hole 2 to the center of hole 3: 5.08 (.20)

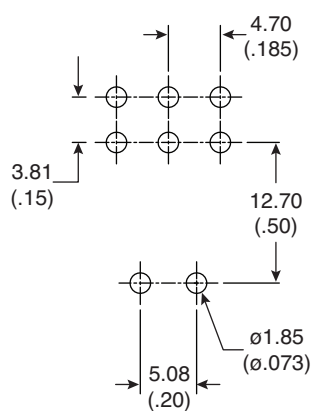

POS.1	POS.2
	
ON	ON
2-3, 5-6	2-1, 5-4
	

Switch Function

- Manual Soldering: Use a soldering iron of 30 watts, controlled at 350°C approximately 5 sec. while applying Solder.
- Wave Soldering: Recommended soldering temperature: 260±5°C
Duration of solder immersion: 5±1 sec.
(PCB is 1.6mm in thickness)

Mountain Switch

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.