



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

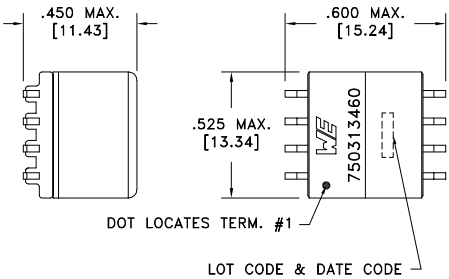

TERM. NO.'s FOR REF. ONLY




DOT LOCATES TERM. #1


LOT CODE & DATE CODE

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	0.085 ohms max.
D.C. RESISTANCE	5-8 tie(5+6, 7+8), @20°C	0.011 ohms max.
INDUCTANCE	2-4 10kHz, 100mVAC, Ls	12.0uH ±10%
SATURATION CURRENT	20% rolloff from initial	7.75A
LEAKAGE INDUCTANCE	2-4 tie(5+6+7+8), 100kHz, 100mVAC, Ls	700nH typ., 1.5uH max.
DIELECTRIC	2-5 tie(6+7), 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(2-4):(5-7)	4:1, ±1%
URNS RATIO	(2-4):(6-8)	4:1, ±1%



Application of the transformer allows for the leadwires between terminals 5&6 and 7&8 to solder bridge.

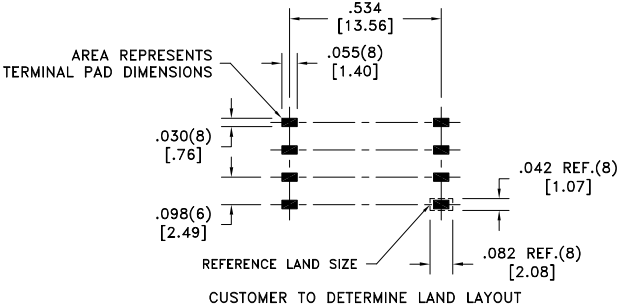

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel		Angles: $\pm 1^\circ$	TRANSFORMER	750313460
		PKG-0328		Fractions: $\pm 1/64$		
		www.we-online.com/midcom		Decimals: $\pm .005$ [.13]		
				Footprint: $\pm .005$ [.13]		
6A	1/14	SEE REVISION SHEET FOR	REVISION LEVEL	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750313460	SPECIFICATION SHEET 1 OF 1

